



## Keylock switch 3 positions, IP65

### Equipment consisting of (schematic overview)

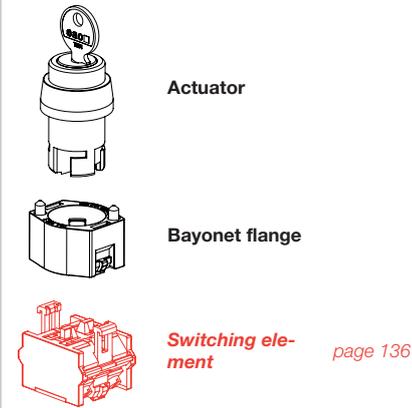

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

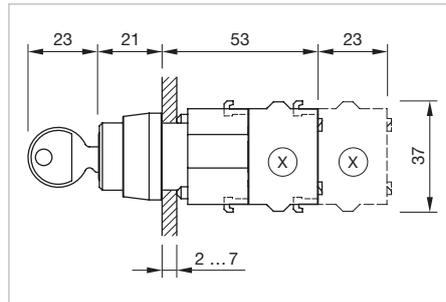

Dimensions [mm]  
X = Screw terminal



Product can differ from the current configuration.

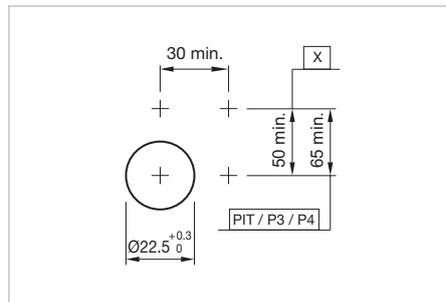

Mounting cut-outs [mm]  
PIT = Push-in terminal,  
P3 = Plug-in terminal 6.3 x 0.8 mm,  
P4 = Double plug-in terminal 6.3 x 0.8 mm,  
X = Screw terminal

### Additional Information

- Other terminal options from the part switching element see «Accessories»
- The standard lock Ronis 251
- Two keys are supplied with each key lock switch
- Further lock numbers see «Technical data»
- Max. 3 switching elements can be clipped on



Switching positions (A = Rest, B = Momentary, C = Maintained)

Front ring	Front bezel	Switching action	Switching angle	Key remove	Part No.	Wiring diagram	Weight	
 <p><b>Keylock switch actuator 3 positions, Front dimension 30 x 30 mm</b></p>	Plastic grey	C - A - B	C = 42°, B = 42°	C	<b>704.337.0</b>	2	0.070 kg	
					C + A	<b>704.344.0</b>	2	0.070 kg
		B - A - B	B = 42° / 42°	A	<b>704.335.0</b>	3	0.070 kg	
		C - A - C	C = 42° / 42°	A	<b>704.334.0</b>	4	0.070 kg	
			C = 90° / 90°	C + A + C	<b>704.333.0</b>	4	0.070 kg	