

Shock-Safe Fuseholder, 5 x 20 mm, Fingergrip, Solder



250 VAC · 1.3W/6.3A



Description

- Screw type fuse carrier

Weblinks


[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Fuse-Link	5 x 20mm
Mounting	Panel Mount, Front Side
Attachment	Fixing Nut
Terminal	Solder
Rated Voltage	250VAC
Rated current	6.3A
Rated Power Acceptance IEC	1.3W / 6.3A @ Ta 23 °C
Degree of Protection	IP 40
Material: Socket	Thermoset, black
Material: Cap	Thermoplastic, black
Unit Weight	8 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Rated Voltage, Rated current

Soldering Methods	Iron Soldering Profile
Contact Resistance	< mΩ at 20 mV
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Admissible Torque on Fixing Nut	max 1.0Nm
Panel Thickness s	max 5mm

Dimension

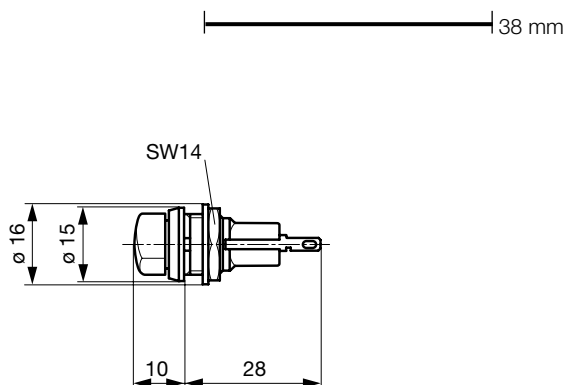

Mounting holes

All Variants

Holder	Cap	Degree of Protection	Order Number
●	Fingergrip	IP 40	7091.3120

Availability for all products can be searched real-time: <http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit

Bulk (10 pcs.)