


Phase Control SCR, 70 A



Super-247



DESCRIPTION/FEATURES

The 70TPS..PbF High Voltage Series of silicon controlled rectifiers are specifically designed for high and medium power switching and phase control applications.



RoHS*
COMPLIANT

Typical applications are in input rectification (soft start) or AC-switches or high current crow-bar as well as others phase-control circuits. These products are designed to be used with Vishay HPP input diodes, switches and output rectifiers which are available in identical package outlines.

This product has been designed and qualified for industrial level and lead (Pb)-free ("PbF" suffix).

PRODUCT SUMMARY

V_T at 100 A	< 1.4 V
I_{TSM}	1400 A
V_{RRM}	1200/1600 V

MAJOR RATINGS AND CHARACTERISTICS

PARAMETER	TEST CONDITIONS	VALUES	UNITS
$I_{T(AV)}$	Sinusoidal waveform	70	A
I_{RMS}	Lead current limitation	75	
V_{RRM}/V_{DRM}	Range	1200/1600	V
I_{TSM}		1400	A
V_T	100 A, $T_J = 25\text{ }^{\circ}\text{C}$	1.4	V
dV/dt		500	V/ μs
dI/dt		150	A/ μs
T_J		- 40 to 125	$^{\circ}\text{C}$

VOLTAGE RATINGS

PART NUMBER	V_{RRM}/V_{DRM} , MAXIMUM REPETITIVE PEAK AND OFF-STATE VOLTAGE V	V_{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I_{RRM}/I_{DRM} AT 125 $^{\circ}\text{C}$ mA
70TPS12PbF	1200	1300	15
70TPS16PbF	1600	1700	

* Pb containing terminations are not RoHS compliant, exemptions may apply

70TPS..PbF High Voltage Series

Vishay High Power Products Phase Control SCR, 70 A



ABSOLUTE MAXIMUM RATINGS						
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS	
Maximum average on-state current	$I_{T(AV)}$	$T_C = 82\text{ }^{\circ}\text{C}$, 180° conduction half sine wave		70	A	
Maximum continuous RMS on-state current as AC switch	$I_{T(RMS)}$	Lead current limitation		75		
Maximum peak, one-cycle non-repetitive surge current	I_{TSM}	10 ms sine pulse, rated V_{RRM} applied	Initial $T_J = T_J$ maximum	1200		
		10 ms sine pulse, no voltage reapplied		1400		
Maximum I^2t for fusing	I^2t	10 ms sine pulse, rated V_{RRM} applied		7200	A^2s	
		10 ms sine pulse, no voltage reapplied		10 200		
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	t = 0.1 to 10 ms, no voltage reapplied		102 000	$A^2\sqrt{s}$	
Low level value of threshold voltage	$V_{T(TO)1}$	$T_J = 125\text{ }^{\circ}\text{C}$		0.916	V	
High level value of threshold voltage	$V_{T(TO)2}$			1.21		
Low level value of on-state slope resistance	r_{t1}			4.138	$m\Omega$	
High level value of on-state slope resistance	r_{t2}			3.43		
Maximum peak on-state voltage	V_{TM}	100 A, $T_J = 25\text{ }^{\circ}\text{C}$		1.4	V	
Maximum rate of rise of turned-on current	di/dt	$T_J = 25\text{ }^{\circ}\text{C}$		150	A/ μs	
Maximum holding current	I_H	$T_J = 25\text{ }^{\circ}\text{C}$		200	mA	
Maximum latching current	I_L			400		
Maximum reverse and direct leakage current	I_{RRM}/I_{DRM}	$T_J = 25\text{ }^{\circ}\text{C}$	$V_R = \text{Rated } V_{RRM}/V_{DRM}$	1.0		
		$T_J = 125\text{ }^{\circ}\text{C}$		15		
Maximum rate of rise of off-state voltage	dV/dt	$T_J = 125\text{ }^{\circ}\text{C}$		500	V/ μs	

TRIGGERING					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Maximum peak gate power	P _{GM}	T = 30 μs		10	W
Maximum average gate power	P _{G(AV)}			2.5	
Maximum peak gate current	I _{GM}			2.5	A
Maximum peak negative gate voltage	- V _{GM}			10	V
Maximum required DC gate voltage to trigger	V _{GT}	T _J = - 40 °C	Anode supply = 6 V resistive load	4.0	
		T _J = 25 °C		1.5	
		T _J = 125 °C		1.1	
Maximum required DC gate current to trigger	I _{GT}	T _J = - 40 °C		270	mA
		T _J = 25 °C		100	
		T _J = 125 °C		80	
Maximum DC gate voltage not to trigger	V _{GD}	T _J = 120 °C, V _{DRM} = Rated value		0.25	V
Maximum DC gate current not to trigger	I _{GD}			6	mA



70TPS..PbF High Voltage Series

Phase Control SCR, 70 A Vishay High Power Products

THERMAL AND MECHANICAL SPECIFICATIONS				
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum junction temperature range	T _J		- 40 to 125	°C
Maximum storage temperature range	T _{Stg}		- 40 to 150	
Maximum thermal resistance, junction to case	R _{thJC}	DC operation	0.27	°C/W
Maximum thermal resistance, junction to ambient	R _{thJA}		40	
Typical thermal resistance, case to heatsink	R _{thCS}	Mounting surface, smooth and greased	0.2	
Approximate weight			6	g
			0.21	oz.
Mounting torque	minimum		6 (5)	kgf · cm (lbf · in)
	maximum		12 (10)	
Marking device		Case style Super-247	70TPS12	
			70TPS16	

ΔR_{thJ-hs} CONDUCTION PER JUNCTION											
DEVICE	SINE HALF WAVE CONDUCTION					RECTANGULAR WAVE CONDUCTION					UNITS
	180°	120°	90°	60°	30°	180°	120°	90°	60°	30°	
70TPS	0.078	0.092	0.117	0.172	0.302	0.053	0.092	0.125	0.180	0.306	°C/W

Note

- The table above shows the increment of thermal resistance R_{thJ-hs} when devices operate at different conduction angles than DC

70TPS..PbF High Voltage Series



Vishay High Power Products Phase Control SCR, 70 A

ORDERING INFORMATION TABLE


Device code	70	T	P	S	16	PbF
	1	2	3	4	5	6
1	-	Current rating (70 = 70 A)				
2	-	Circuit configuration:				
		T = Thyristor				
3	-	Package:				
		P = Super-247				
4	-	Type of silicon:				
		S = Standard recovery rectifier				
5	-	Voltage code x 100 = V_{RRM}				
6	-	• None = Standard production				
		• PbF = Lead (Pb)-free				

12 = 1200 V
16 = 1600 V

TO-247, TO-247 modified

DIMENSIONS in millimeters (inches)

Case style TO-247

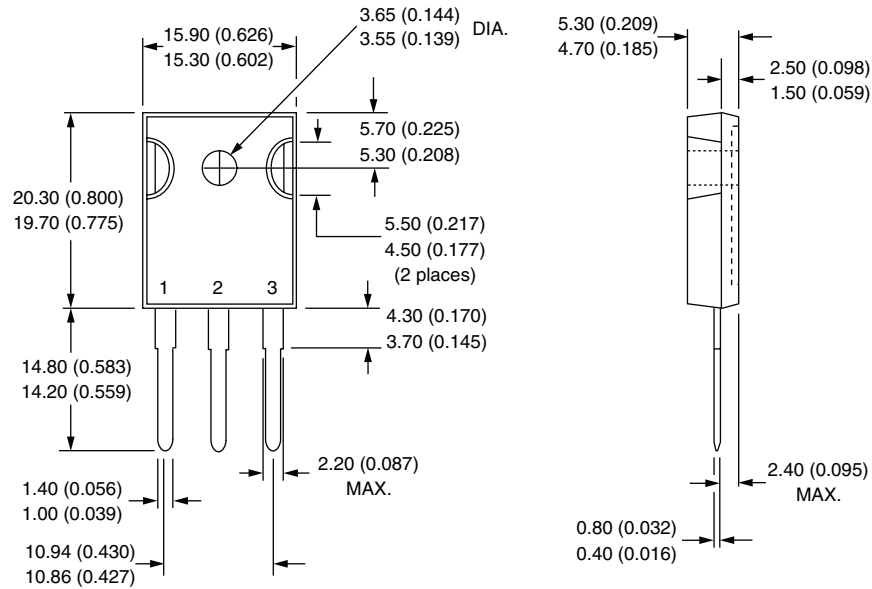

Case style TO-247 (modified)

