

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 570231


C&K 7000 Series Miniature Toggle Switches

Features/Benefits

- **Multi-pole and multi-position**
- **Wide variety of actuator and termination options**
- **Epoxy sealed terminals prevent contamination during soldering**

Typical Applications

- **Telecommunications**
- **Instrumentation**
- **Medical equipment**

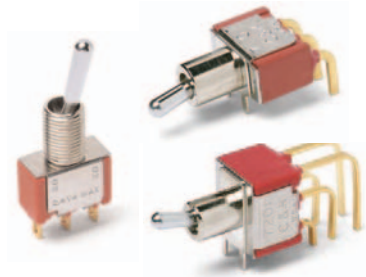

Specifications

CONTACT RATING: B contact material: 0.4 VA max. @ 20 V AC or DC max. Q contact material: 5 AMPS @ 120 V AC or 28 V DC; 2 AMPS @ 250 V AC. See page F-16 for additional ratings.

ELECTRICAL LIFE: 7X01 and UX1 models: 100,000 make-and-break cycles at full load. All other models: 40,000 cycles.

CONTACT RESISTANCE: Below 10 m Ω typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts.

INSULATION RESISTANCE: 10⁹ Ω min.

DIELECTRIC STRENGTH: 1000 Vrms min. @ sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

SOLDERABILITY: Per MIL-STD-202F method 208D, or EIA RS-186E method 9 (1 hour steam aging).

For materials see page F-4.

NOTE: Specifications listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages F-4 thru F-16. For additional options not shown in catalog, consult our Customer Service Center.

Switch Function	Actuator	Bushing	Contact Material	Seal
7101 (STD.) SP On-None-On	M (STD.) .200" high	D (STD.) .280 high, keyway	B (STD.) Gold	E (STD.) Epoxy
7103 (STD.) SP On-Off-On	P3 (STD.) Flatted, anti-rotation, .450" high	H (STD.) .296 high, flat	Q (STD.) Silver	I Epoxy potted base
7105 SP Mom.-Off-Mom.	S (STD.) .420" high	Y (STD.) .350 high, keyway	K Gold, tin-lead	
7107 SP On-Off-Mom.	T (STD.) .687" high, 15/32 bushing	NONE No bushing choice required	M Silver, tin-lead	
7108 SP On-None-Mom.	K2 Locking lever, .704" high	CW Splashproof	G Gold over silver	
7109 SP None-On-Mom.	K9 Locking lever, .704" high	D8 .280" high, flat	L Gold over silver, tin-lead	
7201 (STD.) DP On-None-On	K12 Locking lever, .732" high	D9 .280" high, keyway		Actuator Color/Finish
7203 (STD.) DP On-Off-On	K19 Locking lever, .732" high	H3 .315" high, keyway		NONE (STD.) Bright chrome
7205 DP Mom.-Off-Mom.	L .840" high	H4 8mm high, keyway		0 (STD.) Actuator finish with black bushing
7207 DP On-Off-Mom.	L1 .640" high	Y1 .378" high, keyway		1 White
7208 DP On-None-Mom.	L1P Anti-rotation, .640" high	Y3 8.9mm high, keyway		2 Black
7211 (STD.) DP On-On-On	L2 .550" high	Y4 .378" high, flat		3 Red
7213 DP On-On-Mom.	L2P Anti-rotation, .550" high	Y9 .350" high, keyway		S Satin chrome
7215 DP Mom.-On-Mom.	L3 Plastic, .840" high			KXX Actuator Color/Finish
7301 (STD.) 3P On-None-On	L3P Plastic, anti-rotation, .840" high	Terminations		NONE (STD.) Natural aluminum
7303 3P On-Off-On	L40 Lever handle without cap	A (STD.) Right angle, PC thru-hole		0 (STD.) Natural aluminum with black bushing
7305 3P Mom.-Off-Mom.	L41 .531" high lever handle with cap	AV2 (STD.) Vert. right angle, PC thru-hole		2 Black anodized aluminum
7307 3P On-Off-Mom.	L42 .838" high lever handle with cap	C (STD.) PC Thru-hole		3 Red anodized aluminum
7308 3P On-None-Mom.	L44 .487" high, 15/32 bushing	V3 (STD.) .460 high, V-bracket		7 Blue anodized aluminum
7401 (STD.) 4P On-None-On	L45 .487" high, 15/32 bushing	Z (STD.) Solder lug		
7403 4P On-Off-On	MP Anti-rotation, .200" high	A2 Right angle, PC thru-hole		
7405 4P Mom.-Off-Mom.	P1 Flatted, anti-rotation, .840" high	A3 Right angle, PC thru-hole		
7407 4P On-Off-Mom.	P4 Flatted, anti-rotation, .250" high	A4 Right angle, PC thru-hole		
7408 4P On-None-Mom.	SP Anti-rotation, .420" high	AV3 Vert. right angle, PC thru-hole		
7411 4P On-On-On	T1 .487" high, 15/32 bushing	AW1 Right angle, extended, PC thru-hole		
7413 4P On-On-Mom.	T1P Anti-rotation, .487" high, 15/32 bushing	AW3 Right angle, extended, PC thru-hole		
7415 4P Mom.-On-Mom.	T2P Flatted, anti-rotation, .610" high, 15/32 bushing	AW4 Right angle, extended, PC thru-hole		
	TP Anti-rotation, .687" high, 15/32 bushing	V2 .555" high, V-bracket		
		V4 .630" high, V-bracket		
		V6 .460" high, V-bracket		
		V7 .630" high, V-bracket		
		V8 .953" high, V-bracket		
		V9 1.150" high, V-bracket		
		V21 .555" high, snap-in V-bracket		
		V31 .460" high, snap-in V-bracket		
		V41 .630" high, snap-in V-bracket		
		V61 .460" high, snap-in V-bracket		
		V71 .630" high, snap-in V-bracket		
		V81 .953" high, snap-in V-bracket		
		W .750" long, wire wrap		
		W1 .964" long, wire wrap		
		W3 .425" long, wire wrap		
		W4 1.062" long, wire wrap		
		W5 1.305" long, wire wrap		
		Z3 Quick connect		


Note: UL/CSA models available, see pages F-4 & F-5.


C&K 7000 Series Miniature Toggle Switches

SWITCH FUNCTION


NO. POLES	MODEL NO.	UL/CSA** MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS			SCHEMATIC
			POS. 1	POS. 2	POS. 3	POS. 1	POS. 2	POS. 3	
									
3P	7301 (STD.)	U31	ON	NONE	ON	2-3,5-6,8-9	N/A	2-1,5-4,8-7	
	7303	U33	ON	OFF	ON	2-3,5-6,8-9	OPEN	2-1,5-4,8-7	
	7305	U35	MOM.	OFF	MOM.				
	7307	U37	ON	OFF	MOM.				
	7308	U38	ON	NONE	MOM.	2-3,5-6,8-9	N/A	2-1,5-4,8-7	

3PDT

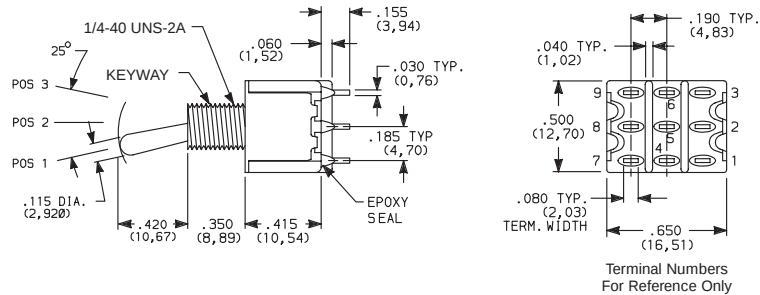

4P	7401 (STD.)	U41	ON	NONE	ON	2-3,5-6,8-9,11-12	N/A	2-1,5-4,8-7,11-10	
	7403	U43	ON	OFF	ON	2-3,5-6,8-9,11-12	OPEN	2-1,5-4,8-7,11-10	
	7405	U45	MOM.	OFF	MOM.				
	7407	U47	ON	OFF	MOM.				
	7408	U48	ON	NONE	MOM.	2-3,5-6,8-9,11-12	N/A	2-1,5-4,8-7,11-10	
	7411*	U411*	ON	ON	ON	2-3,5-6,8-9,11-12	2-3,5-4,8-9,11-10	2-1,5-4,8-7,11-10	
	7413*	U413*	ON	ON	MOM.				
	7415*	U415*	MOM.	ON	MOM.				

4PDT

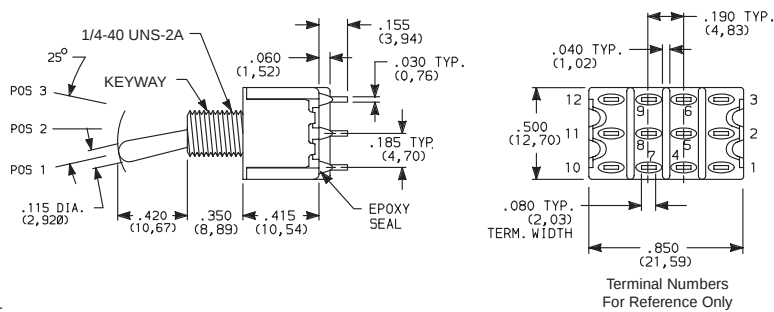

MOM. = Momentary

* Wiring for 3-way switch, see Section N.

** U11-U415 model nos. with all options when ordered with G, L, M or Q contact material.




F

Toggle


C&K 7000 Series Miniature Toggle Switches

ACTUATOR



S (STD.) .420" HIGH ¹


SP ANTIROTATION, .420" HIGH ^{2,3}



S actuator standard when ordered with C, W-W5, Z & Z3 terminations. Caps are available separately, see page F-16.

M (STD.) .200" HIGH ¹


MP ANTIROTATION, .200" HIGH ^{2,3}



M actuator standard when ordered with all terminations except C, W-W5, Z & Z3. Caps are available separately, see page F-16.

L, L1, L2 .840", .640", .550" HIGH ¹


L1P, L2P ANTIROTATION, .840", .640", .550" HIGH ^{2,3}




OPTION CODE	DIM 'A'
L	.840 (21,34)
L1, L1P	.640 (16,26)
L2, L2P	.550 (13,97)

Caps are available separately, see page F-16.


P1 FLATTED WITH ANTIROTATION, .840" HIGH ^{2,3}



P3 (STD.) FLATTED WITH ANTIROTATION, .450" HIGH ^{2,3}




P4 FLATTED WITH ANTIROTATION, .250" HIGH ^{2,3}



Dress nut part number 709901201 supplied standard with threaded bushing. (Part number 709903201 with metric threaded bushings.)


T (STD.) .687" HIGH ^{1,2}

TP ANTIROTATION, .687" HIGH, 15/32 BUSHING ^{1,2,3}

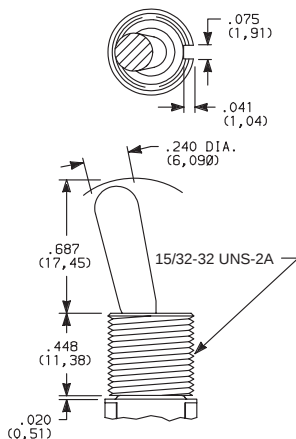


T1 .487" HIGH ^{1,2}

T1P ANTIROTATION, .487" HIGH, 15/32 BUSHING ^{1,2,3}

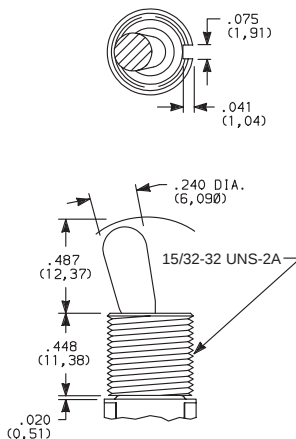

T2P FLATTED, ANTIROTATION, .610" HIGH, 15/32 BUSHING ^{1,2,3}

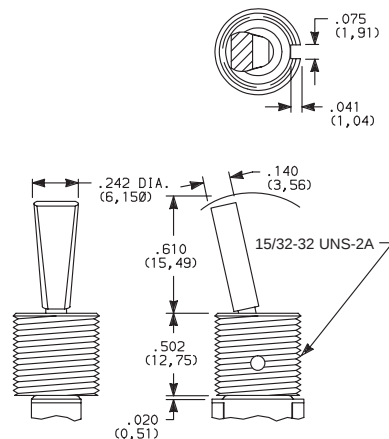

Bushing option code not required unless CW splashproof bushing ordered. TP & T1P actuators not available with CW splashproof bushing. All TXX actuators not available on single pole models with A-A7, AW-AW4, R terminations.

Bushing option code not required. T2P actuator not available with CW splashproof bushing or single pole models with A-A7, AW-AW4, R terminations.

Toggle

¹ L, L1, L2, M, S & TXX actuators not available with Y1 bushing.

² L1P, L2P, MP, P1, P3, P4, SP & TXX actuators not available with D8 & H4 bushing.

³ Antirotation: Provides anti-'push-in' feature on actuator.

* Add .070 (1,78) for D, D8 & D9 bushings, subtract .020 (0,51) for H3 bushing.

OPTION CODE	ACTUATOR FINISH
NONE	(STD.) BRIGHT CHROME-With Nickle Plated Bushing
2	(STD.) BLACK
0	BRIGHT CHROME-With Black Bushing
S	SATIN CHROME

NOTE: Black hardware is supplied when either black actuators or bushings are specified. For additional hardware, see section N.




Dimensions are shown: IN (mm)
Dimensions subject to change

C&K 7000 Series Miniature Toggle Switches


ACTUATOR

ACTUATOR FINISH/COLOR




- K2** LOCKING LEVER, .704" HIGH
(threaded)
- K9** LOCKING LEVER, .704" HIGH
(unthreaded)

- K12** LOCKING LEVER, .732" HIGH
(threaded)
- K19** LOCKING LEVER, .732" HIGH
(unthreaded)



Replaces K, K8



Replaces K1, K18

OPTION CODE	ACTUATOR CAP FINISH
NONE	(STD.) NATURAL ALUMINUM-With Nickel Plated Bushing
0	(STD.) NATURAL ALUMINUM-With Black Bushing
2	BLACK ANODIZED ALUMINUM
3	RED ANODIZED ALUMINUM
7	BLUE ANODIZED ALUMINUM

Locking Positions



-01 Models
2 Position lock



-03 & -11 Models
3 Position lock



-05, -09 & -15 Models
1 Position lock



-07 & -13 Models
2 Position lock



-08 Models
1 Position lock

NOTE: To prevent accidental actuation, toggle must be lifted before being actuated. When released, toggle will lock in place. Overtightening mounting nut may cause actuator to bind.


Locking levers supplied with bushing shown.

Bushing option code not required unless CW splashproof bushing ordered.


- L40** LEVER HANDLE WITHOUT CAP

- L41** PLASTIC LEVER HANDLE WITH
ANTIROTATION AND CAP, P/N 4810


- L42** PLASTIC LEVER HANDLE WITH
ANTIROTATION AND CAP, P/N 4811



No color choice required.




Finish: Matte (L41 & L42).



- L3** PLASTIC, .840" HIGH

- L3P** ANTIROTATION, .840" HIGH



OPTION CODE	PLASTIC ACTUATOR COLORS
NONE	(STD.) No Actuator Color (L40 option)
2	(STD.) BLACK
1	WHITE
3	RED

NOTE: Lever handle for L41 & L42 actuators supplied, but not installed. For interchangeability, order L40 actuator option and lever handles separately, see page F-17. L4X actuators not available with H4, Y1, Y4 bushings. Antirotation: Provides anti-'push-in' feature on actuator.

* Add .070 (1,78) for D, D8 & D9 bushings, subtract .020 (0,51) for H3 bushing.



F

Toggle

C&K 7000 Series Miniature Toggle Switches


BUSHING

BUSHING FINISH


BUSHING

Y (STD.) .350" HIGH, THREADED, KEYWAY

Y9 .350" HIGH, UNTHREADED, KEYWAY



No bushing choice required with KXX, TXX actuators. (exception: Specify CW if splashproof bushing desired).





Y bushing standard with C, W-W5, Z or Z3 terminations.

NONE NO BUSHING

D (STD.) .280" HIGH, THREADED, KEYWAY



D8 .280" HIGH, UNTHREADED, FLAT ³

D9 .280" HIGH, UNTHREADED, KEYWAY





D9 bushing standard with all terminations except C, W-W5, Z or Z3. Add .070 (1,78) to all actuators lengths with D, D8 & D9 bushings.

H (STD.) .296" HIGH, FLAT THREADED, HIGH TORQUE ^{1,2}





H3 .315" HIGH, KEYWAY THREADED, HIGH TORQUE ^{1,2}





Subtract .020 (0,51) from all actuator lengths for H3 bushing.



H4 8mm HIGH, KEYWAY, THREADED, METRIC HIGH TORQUE ^{1,2,3}





Y1 .378" HIGH, KEYWAY, THREADED, HIGH TORQUE ^{1,2,4}



Y3 8.9mm HIGH, KEYWAY, THREADED, METRIC





Y4 .378" HIGH, FLAT, THREADED, HIGH TORQUE ^{1,2,5}





CW THREADED, SPLASHPROOF ^{1,2}

For T & T1 actuators.



IP67 Degree of protection, totally protected against dust, full-scale voltage protection, temporary immersion. Internal actuator seal standard. External bushing seal washer available separately, order from: Multi-Flex Seals, Inc., Hackensack, NJ. Part number: MFS-60064.

For actuators other than T & T1.



IP67 Degree of protection, totally protected against dust, full-scale voltage protection, temporary immersion. Internal actuator seal and external bushing seal washer standard.

OPTION CODE	BUSHING FINISH
NONE	(STD.) NICKEL on all bushings except 'D8' satin chrome.
2	BLACK

¹ Will withstand 12 in.-lbs. of torque with no distortion.

² CW, H, H3, H4, Y1 & Y4 bushings not available on single pole models with A4, R terminations.

³ D8 & H4 bushings available only with L, L1, L2, L3, M & S actuators.

⁴ Y1 bushing available only with LP, LXP, MP, PX & SP actuators.

⁵ Y4 bushing not available with L4X actuators.


NOTE: Two mounting nuts, locking ring and lockwasher supplied standard with threaded bushings. Black hardware is supplied when either black bushings or actuators are specified. Optional mounting nut and locking ring styles and finishes available, see section N.

PANEL MOUNTING

1/4 INCH BUSHING

METRIC BUSHING

15/32 INCH BUSHING

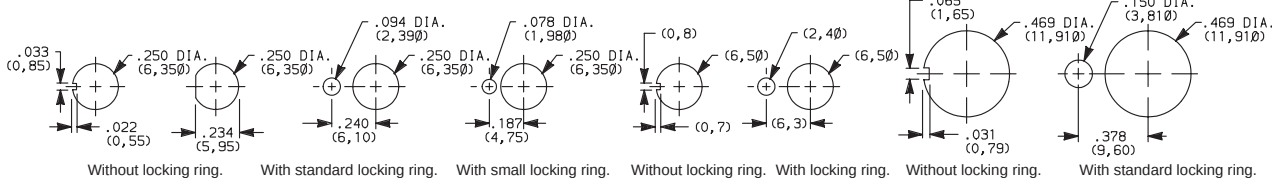


Third Angle Projection

Dimensions are shown: IN (mm)
Dimensions subject to change



C&K 7000 Series Miniature Toggle Switches

TERMINATIONS

Z (STD.) SOLDER LUG



C (STD.) PC THRU-HOLE




SPDT thru 4PDT


Not available with K, L or M contact materials.

SPDT thru 4PDT

Z3 QUICK CONNECT



W, W1, W3, W4, W5 WIRE WRAP






OPTION CODE	DIM 'A'
W	.750 (19,05)
W1	.964 (24,48)
W3	.425 (10,80)
W4	1.062 (26,97)
W5	1.305 (33,15)

SPDT thru 4PDT

Not available with K, L or M contact materials.
Mating quick connector available, order part number 530100000, page F-17.

SPDT thru 4PDT


A (STD.) RIGHT ANGLE, PC THRU-HOLE

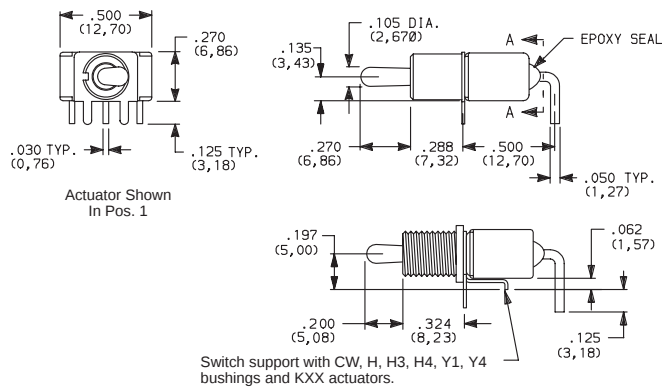


7101MD9ABE
Horizontal Actuation
SPDT

Part No. Shown: 7101MHABE

A3 RIGHT ANGLE, SNAP-IN, PC THRU-HOLE




AW1, AW3, AW4 RIGHT ANGLE, EXTENDED, PC THRU-HOLE



OPTION CODE	DIM 'A'
AW1	.72 (18,3)
AW3	.20 (5,1)
AW4	.83 (21,1)

PC MOUNTING



Not available with I seal option.
Terminal bend radii and lead-in manufacturing option.



F

Toggle


C&K 7000 Series Miniature Toggle Switches

TERMINATIONS

A (STD.) RIGHT ANGLE, PC THRU-HOLE





7201MD9ABE
Horizontal Actuation
DPDT



Actuator Shown
In Pos. 1



Terminals &
Support

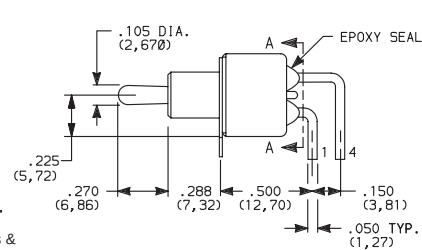

SECTION A-A


A3 RIGHT ANGLE, SNAP-IN, PC THRU-HOLE

AW1, AW4 RIGHT ANGLE, EXTENDED, PC THRU-HOLE

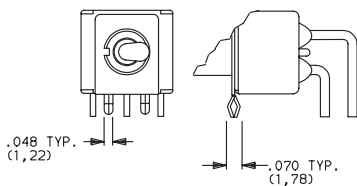

OPTION CODE	DIM 'A'
AW1	.40 (10,2)
AW4	.50 (12,7)

PC MOUNTING




Not available with I seal option.
Terminal bend radii and lead-in manufacturing option.

A (STD.) RIGHT ANGLE, PC THRU-HOLE





7301MD9ABE
Horizontal Actuation
3PDT




Actuator Shown
In Pos. 1

Terminals &
Support

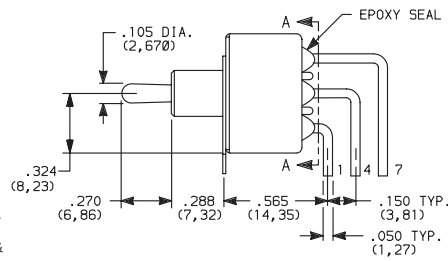


SECTION A-A


AW4 RIGHT ANGLE, EXTENDED, PC THRU-HOLE



PC MOUNTING



Not available with I seal option.
Terminal bend radii and lead-in manufacturing option.




Third Angle
Projection

Dimensions are shown: IN (mm)
Dimensions subject to change

C&K 7000 Series Miniature Toggle Switches

TERMINATIONS

A2 RIGHT ANGLE, PC THRU-HOLE, .156" PITCH

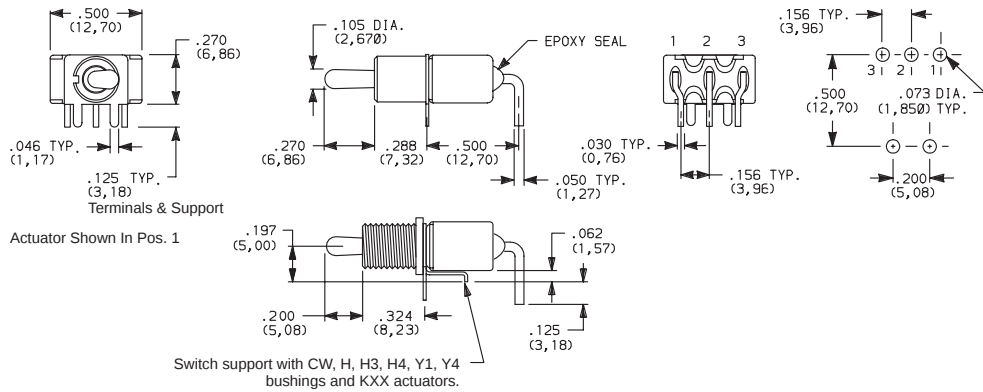


Not available with TXX actuators and I seal.
Terminal bend radii and lead-in manufacturing option.

PC MOUNTING



7101MHA2BE
Horizontal Actuation
SPDT

A4 RIGHT ANGLE, PC THRU-HOLE .156" PITCH

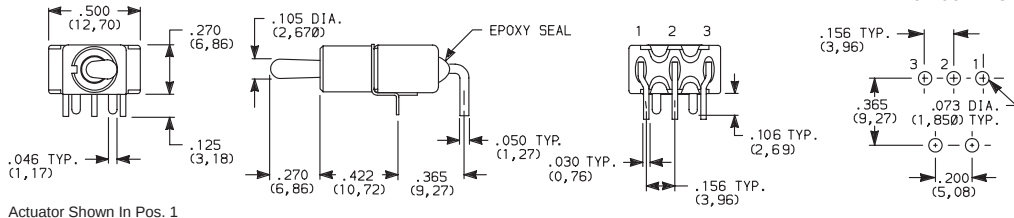

Not available with KXX & TXX actuators, CW, H, H3, H4, Y1 & Y4 bushings,
and I seal. Terminal bend radii and lead-in manufacturing option.


NOTE: The A4 option is available with any contact material and can be UL recognized and CSA certified. The PC pattern must clear switch support legs.

PC MOUNTING




7101MD9A4BE
Horizontal Actuation
SPDT

AV2 (STD.) VERTICAL RIGHT ANGLE, PC THRU-HOLE, .150" PITCH

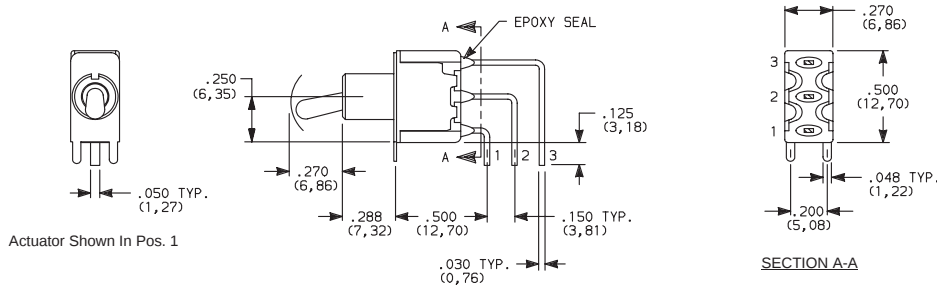

7101MD9AV2BE
Horizontal Actuation
SPDT

AV3 VERTICAL RIGHT ANGLE, SNAP-IN, PC THRU-HOLE, .150" PITCH

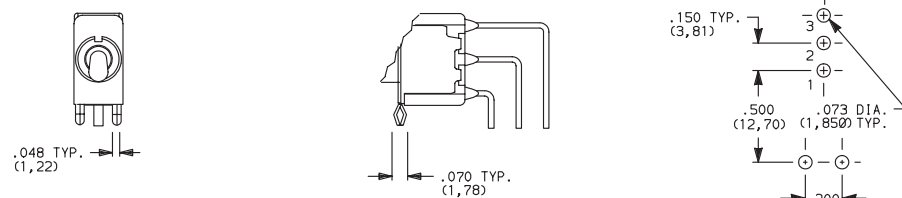

Not available with I seal option.
Terminal bend radii and lead-in manufacturing option.



Dimensions are shown: IN (mm)
Dimensions subject to change



F

Toggle


C&K 7000 Series Miniature Toggle Switches

TERMINATIONS




AV2 (STD.) VERTICAL RIGHT ANGLE, PC THRU-HOLE, .150" PITCH



7201MD9AV2BE
Vertical Actuation
DPDT

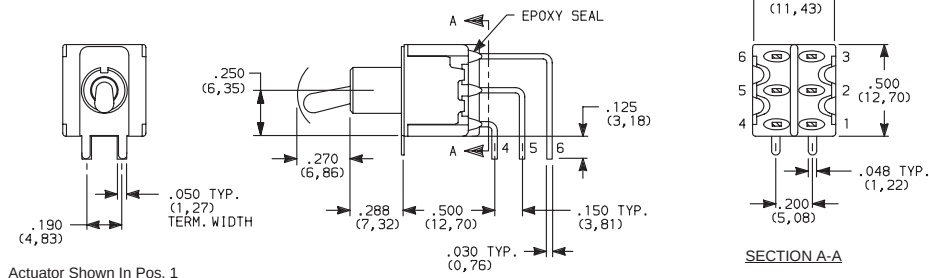

AV3 VERTICAL RIGHT ANGLE, SNAP-IN, PC THRU-HOLE, .150" PITCH




Not available with I seal option.
Terminal bend radii and lead-in manufacturing option.




AV2 (STD.) VERTICAL RIGHT ANGLE, PC THRU-HOLE, .150" PITCH



7301MD9AV2BE
Vertical Actuation
3PDT

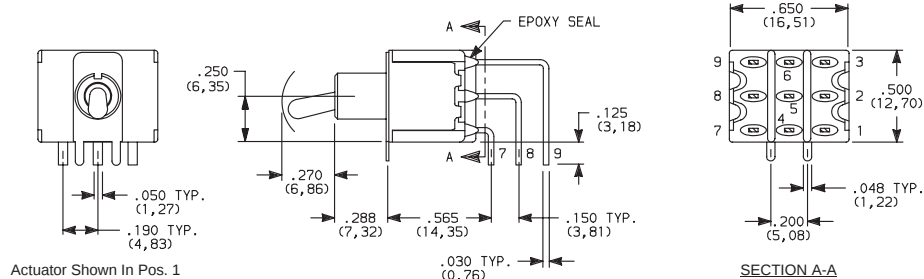

AV3 VERTICAL RIGHT ANGLE, SNAP-IN, .150" PITCH



Not available with I seal option.
Terminal bend radii and lead-in manufacturing option.




Dimensions are shown: IN (mm)
Dimensions subject to change



C&K 7000 Series Miniature Toggle Switches

TERMINATIONS

AV2 (STD.) VERTICAL RIGHT ANGLE, PC THRU-HOLE, .150" PITCH



Actuator Shown In Pos. 1


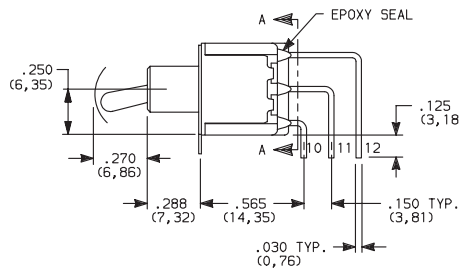


SECTION A-A




7401MD9AV2BE
Vertical Actuation
4PDT

AV3 VERTICAL RIGHT ANGLE, SNAP-IN, PC THRU-HOLE .150" PITCH




Not available with I seal option.
Terminal bend radii and lead-in manufacturing option.






V2, V6, V7, V8 VERTICAL MOUNT, V-BRACKET

V21, V61, V71, V81 VERTICAL MOUNT, V-BRACKET, SNAP-IN

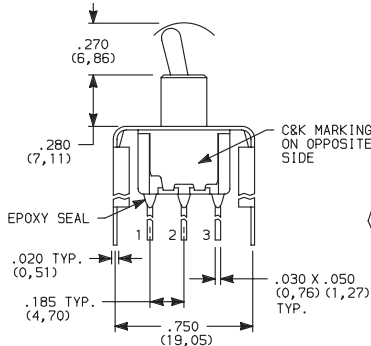

Actuator Shown In Pos. 1




7101MD9_BE
SPDT

OPTION CODE	DIM 'A'
V2, V21	.555 (14,10)
V6, V61	.460 (11,68)
V7, V71	.630 (16,00)
V8, V81	.953 (24,21)




Not available with I seal option.

V2, V6, V7, V8 VERTICAL MOUNT, V-BRACKET

V21, V61, V71, V81 VERTICAL MOUNT, V-BRACKET, SNAP-IN

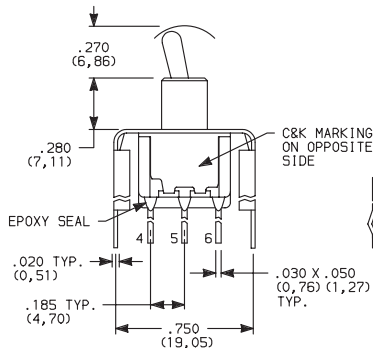

Actuator Shown In Pos. 1

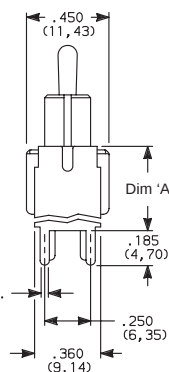

OPTION CODE	DIM 'A'
V2, V21	.555 (14,10)
V6, V61	.460 (11,68)
V7, V71	.630 (16,00)
V8, V81	.953 (24,21)



7201MD9_BE
DPDT

Not available with I seal option.



Cannon



F

Toggle

C&K 7000 Series Miniature Toggle Switches


TERMINATIONS

V2, V7, V8 VERTICAL MOUNT, V-BRACKET


V21, V71, V81 VERTICAL MOUNT, V-BRACKET, SNAP-IN




7301MD9_BE
3PDT

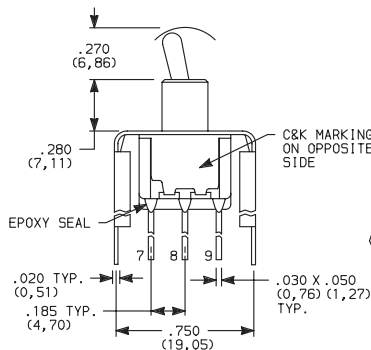


Actuator Shown In Pos. 1



Snap-In	.050 T (1.27)
---------	------------------

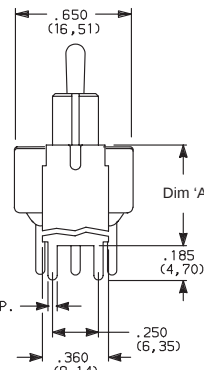

PC MOUNTING



OPTION CODE	DIM 'A'
V2, V21	.555 (14,10)
V7, V71	.630 (16,00)
V8, V81	.953 (24,21)


Not available with I seal option.

V2, V7, V8 VERTICAL MOUNT, V-BRACKET


V21, V71, V81 VERTICAL MOUNT, V-BRACKET, SNAP-IN




7401MD9__BE
4PDT

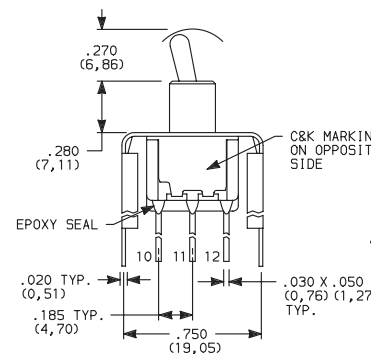


Actuator Shown In Pos. 1



Snap-In .050 TY
(1.27)

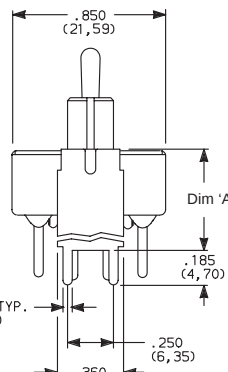

PC MOUNTING



OPTION CODE	DIM 'A'
V2, V21	.555 (14,10)
V7, V71	.630 (16,00)
V8, V81	.953 (24,21)


Not available with I seal option.

V3 (STD.), V4, V9 VERTICAL MOUNT, V-BRACKET


V31, V41 VERTICAL MOUNT, V-BRACKET, SNAP-IN




7101MD9__BE
SPDT

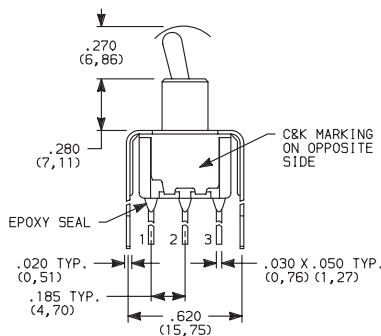


Actuator Shown In Pos. 1



Snap-In .048 TYP.
(1.22)



PC MOUNTING



OPTION CODE	DIM 'A'
V3, V31	.460 (11,68)
V4, V41	.630 (16,00)
V9	1.150 (29,21)

Not available with I seal option.



Third Angle Projection

Dimensions are shown: IN (mm)
Dimensions subject to change


www.ittcannon.com

C&K 7000 Series Miniature Toggle Switches



TERMINATIONS

V3 (STD.), V4, V9 VERTICAL MOUNT, V-BRACKET


V31, V41 VERTICAL MOUNT, V-BRACKET, SNAP-IN

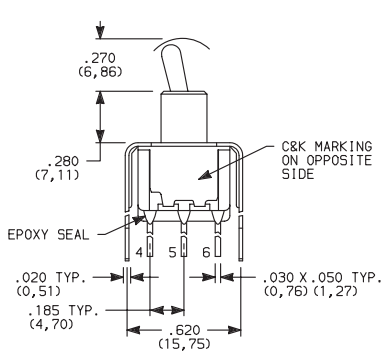

Actuator Shown In Pos. 1

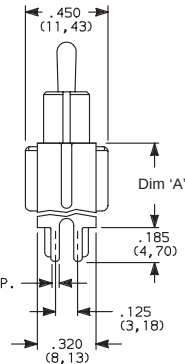

PC MOUNTING




7201MD9_BE
DPDT

OPTION CODE	DIM 'A'
V3, V31	.460 (11,68)
V4, V41	.630 (16,00)
V9	1.150 (29,21)



Not available with I seal option.

V4, V9 VERTICAL MOUNT, V-BRACKET


V41 VERTICAL MOUNT, V-BRACKET, SNAP-IN

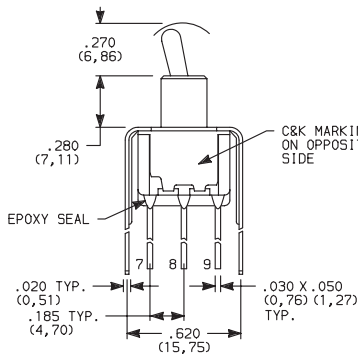

Actuator Shown In Pos. 1

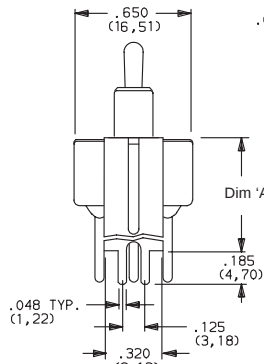

PC MOUNTING




7301MD9_BE
3PDT

OPTION CODE	DIM 'A'
V4, V41	.630 (16,00)
V9	1.150 (29,21)



Not available with I seal option.

V4, V9 VERTICAL MOUNT, V-BRACKET


V41 VERTICAL MOUNT, V-BRACKET, SNAP-IN

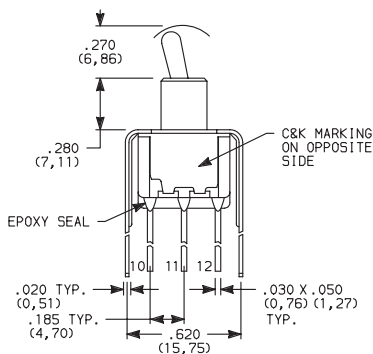

Actuator Shown In Pos. 1

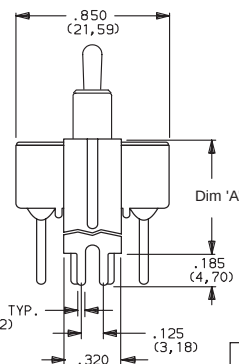

PC MOUNTING



7401MD9_BE
4PDT

OPTION CODE	DIM 'A'
V4, V41	.630 (16,00)
V9	1.150 (29,21)

Not available with I seal option.



Cannon



F

Toggle

C&K 7000 Series Miniature Toggle Switches

CONTACT MATERIAL

OPTION CODE	CONTACT MATERIAL	TERMINAL PLATING	RATINGS	
B (STD.)	GOLD ¹	GOLD ¹	LOW LEVEL/DRY CIRCUIT	0.4 VA MAX. @ 20 V AC OR DC MAX.
K		TIN-LEAD ⁶		
Q (STD.)	SILVER ^{4,5}	SILVER ⁵	POWER	5 AMPS @ 120 V AC OR 28 V DC; 2 AMPS @ 250 V AC.
M		TIN-LEAD ⁶		
G	GOLD OVER SILVER ^{2,3}	GOLD ³	LOW LEVEL/DRY CIRCUIT OR POWER	0.4 VA MAX @ 20 V AC OR DC MAX OR 5 AMPS @ 120 V AC OR 28 V DC; 2 AMPS @ 250 V AC.
L		TIN-LEAD ⁶		


CONTACT MATERIAL/APPLICATION RECOMMENDATIONS-SEE SECTION N.

- ¹ CONTACTS & TERMINALS: Copper alloy, with gold plate over nickel plate.
² END CONTACTS: Coin silver, with gold plate over nickel plate.
³ CENTER CONTACTS & ALL TERMINALS: Copper alloy, with gold plate over nickel plate.
⁴ END CONTACTS: Coin silver, silver plated.
⁵ CENTER CONTACT & ALL TERMINALS: Copper alloy, silver plated.
⁶ TERMINALS: Copper alloy, with tin-lead alloy over nickel plate.

U11-U415 model numbers   with all options when ordered with G, L, M or Q contact material.
B contact material standard with all terminations except C, Z & Z3.
B contact material standard must be ordered with A7 & R terminations.
Q contact material standard with C, Z & Z3 terminations.
K, L & M contact materials not available with Z & Z3 terminations.


SEAL

E (STD.) EPOXY SEAL



Compatible with "bottom-wash" PC board cleaning methods.

I EPOXY POTTED BASE

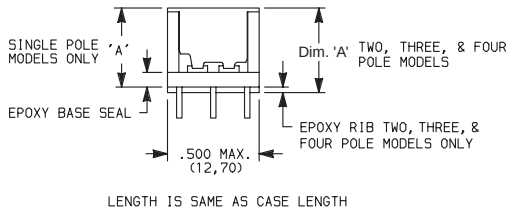

NO. POLES	DIM 'A'
SP	.410 (10,41)
DP	.440 (11,18)
3P	.505 (12,83)
4P	.505 (12,83)

Available with C, W-W5, Z & Z3 terminations only.

AVAILABLE HARDWARE


Cap



PART NO.
896801000 WHITE
896802000 BLACK
896803000 RED

Material: Polyethylene
Finish: Matte


Cap



PART NO.
763701000 WHITE
763702000 BLACK
763703000 RED

Material: Vinyl
Finish: Matte

Cap



PART NO.
706201000 WHITE
706202000 BLACK
706203000 RED

Material: Vinyl
Finish: Matte

Dimensions are shown: IN (mm)
Dimensions subject to change

www.ittcannon.com

C&K 7000 Series Miniature Toggle Switches

AVAILABLE HARDWARE

L41 Lever handle




PART NO.

481001000 WHITE
481002263 BLACK
481003000 RED

Material: Nylon
 Finish: Matte

L42 Lever handle



PART NO.

481101000 WHITE
481102263 BLACK
481103000 RED

Material: Nylon
 Finish: Matte

Fits Z3 Termination
female connector



PART NO.

530100000

Available in loose pieces.

NOTE: Additional nuts, locking rings and lockwashers available separately, see section N.

Other colors available, consult Customer Service Center.