

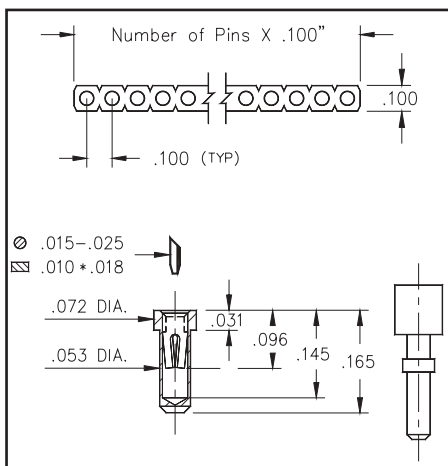


Fig. 1

- Low profile receptacles sit .031" above board.
- Series 714 uses M-M# 1401 & 1407 pin receptacles. See page 126 for details.
- Hi-Rel 4-finger BeCu #30 contact is used in the 1401 receptacle and a #11 contact is used in the 1407. Both are rated at 3 amps. See pages 206 & 208 for details.



Ordering Information

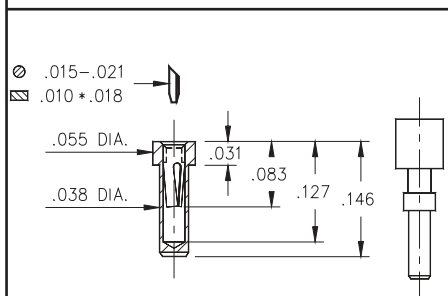


Fig. 2

Fig. 1

Single Row (.055 min. mounting hole)

714-XX-1__-41-001
Specify # of pins → 01-64

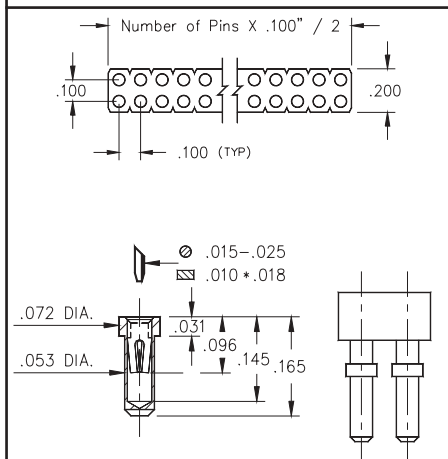


Fig. 3

Fig. 2

Single Row (.039 min. mounting hole)

714-XX-1__-31-007
Specify # of pins → 01-64

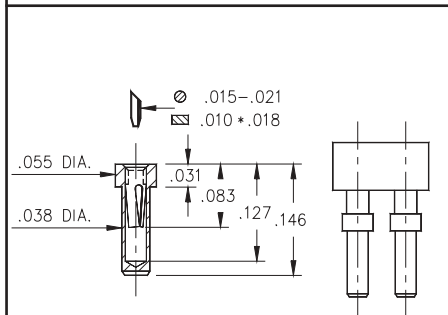


Fig. 4

Fig. 3

Double Row (.055 min. mounting hole)

714-XX-2__-41-001
Specify # of pins → 02-64

Fig. 4

Double Row (.039 min. mounting hole)

714-XX-2__-31-007
Specify # of pins → 02-64

XX= Plating Code
See Below

SPECIFY PLATING CODE XX=			93	99
Sleeve (Pin)			200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)			30μ" Au	200μ" Sn/Pb