




PRODUCT NUMBER	SIZE	LATCHING AVAILABILITY	MISSING PIN POSITIONS
71918-X06(B)LF	2x3	0/1/2	
71918-X08(B)LF	2x4	0/1/2	
71918-X10(B)LF	2x5	0/1/2	
71918-X14(B)LF	2x7	0/1/2	
71918-X16(B)LF	2x8	0/1/2	
71918-X18(B)LF	2x9	0/1/2	
71918-X20(B)LF	2x10	0/1/2	
71918-X26(B)LF	2x13	0/1/2	
71918-X27(B)LF	2x13	0/1/2	PIN 21 & 22
71918-X28(B)LF	2x13	0/1/2	PIN 5 to 12
71918-X30(B)LF	2x15	0/1/2	
71918-X34(B)LF	2x17	0/1/2	
71918-X35(B)LF	2x17	0/1/2	PIN 2 & 3
71918-X40(B)LF	2x20	0/1/2	
71918-X44(B)LF	2x22	0/1/2	
71918-X45(B)LF	2x22	0/1/2	PIN 9;10;23;24
71918-X50(B)LF	2x25	0/1/2	
71918-X51(B)LF	2x25	0/1/2	PIN 39 to 46
71918-X60(B)LF	2x30	0/1/2	
71918-X64(B)LF	2x32	0/1/2	

PLATING :

- 0.76µm GOLD/GXT
(PdNi WITH GOLD FLASH) ON CONTACT AREA
- 2µm MIN MATTE TIN ON TAIL
- UNDERPLATE : 1.27µm Ni MIN

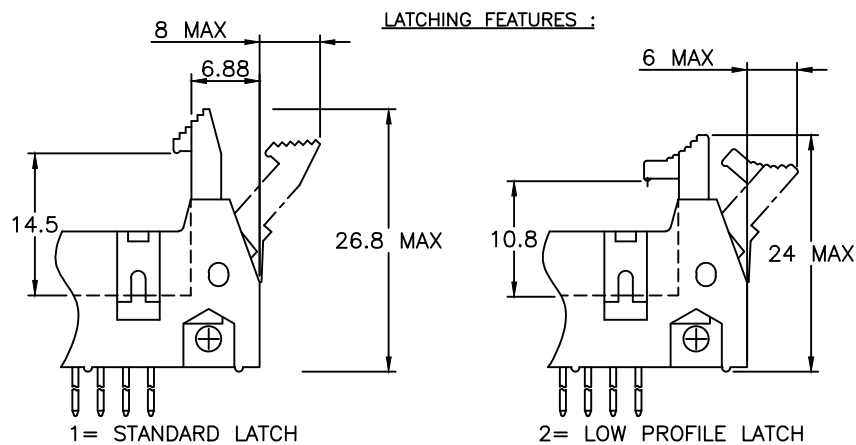

PIN POSITION INDICATION FOR POLARIZED VERSIONS

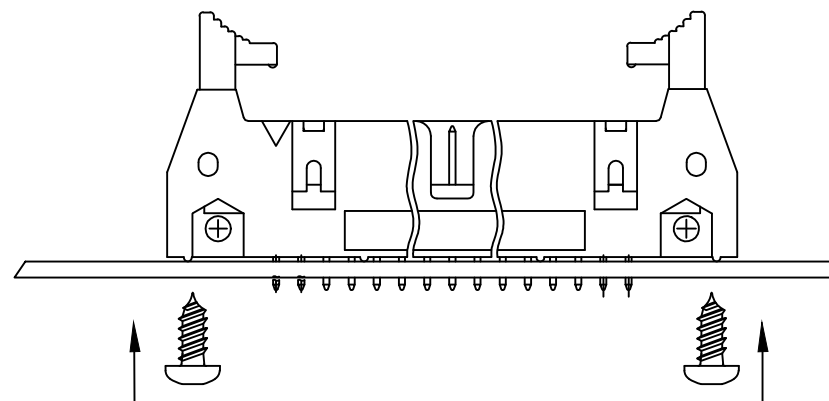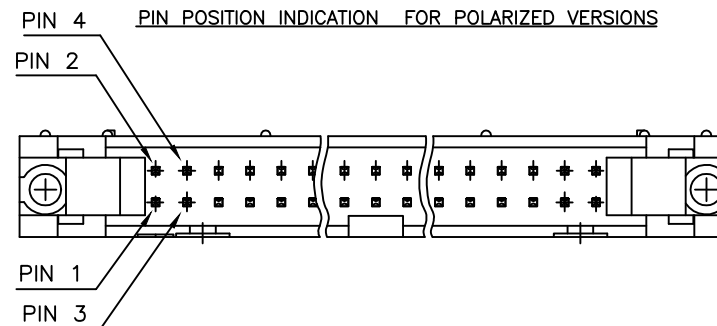

WHEN THE CONNECTORS NEED TO BE FIXED ON THE PCB'S
THE STAINLESS SCREWS REF TC POZI DIN7981 Ø2.9 X 6.5MM
TO BE USED

mat'l. code				surface	tolerance	projection	product family	
				ISO 1302 ✓	ISO 406 ISO 1101		QUICKIE	
ltr	ecn no	dr	date	tolerances unless otherwise specified			title	
Y	F-23514	LMU	16.03.14	angles	.X ±0.3	mm	SHR.EL.HEADER	
				linear	.XX ±0.15		STR DR TMT	
T	F12-001	LMU	12.02.06		.XXX ±0.05	scale 2:1	dwg no	
U	F12-0838	LMU	12.12.06	dr	D.LE	01.01.24	sheet 2 of - size	
V	B-16776	LMU	14.01.23	enrg	JM.C	01.01.24	71918	
W	B-19091	LMU	14.10.16	chr	JF.N	01.01.24	A3	
X	B-20412	BVE	15.03.10	appd	JM.C	01.01.24	type	
sheet index				revision	sheet		CUSTOMER Drawing	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[71918-120RLF](#) [71918-130RLF](#) [71918-264RLF](#) [71918-006LF](#) [71918-008LF](#) [71918-010LF](#) [71918-014LF](#) [71918-016LF](#) [71918-018LF](#) [71918-026LF](#) [71918-030LF](#) [71918-034LF](#) [71918-040LF](#) [71918-044LF](#) [71918-050LF](#) [71918-060LF](#) [71918-064LF](#) [71918-460LF](#) [71918-464LF](#)