

Product number
SRJ 110 141/1
72640-001LF

A

B

C

D

E

F

A














B

C

D

E

F

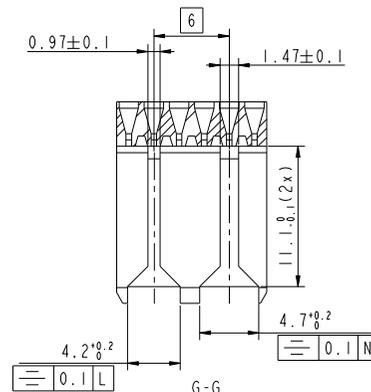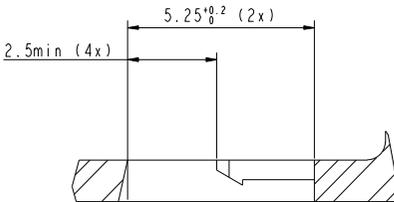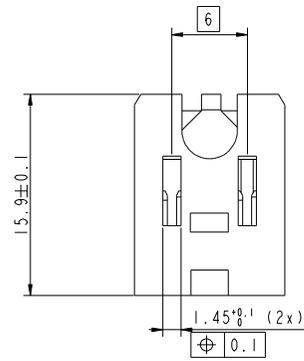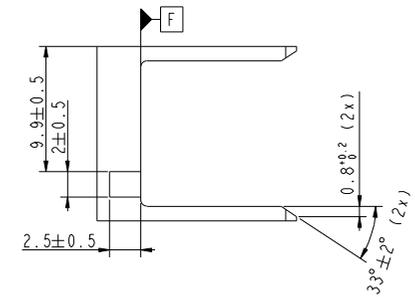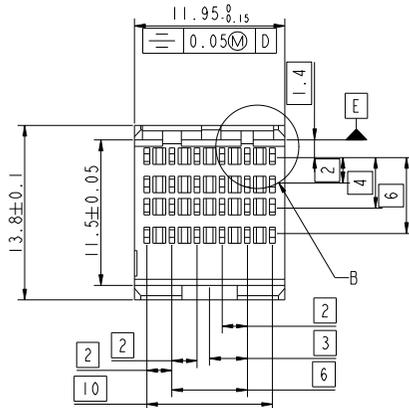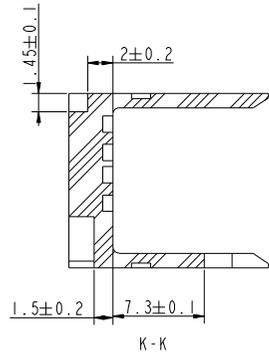

NOTES:

1. Material: liquid crystal polymer 30% glass flame retardant ACC. UL 94-V0 color natural.
2. This product with "LF" suffix meets european union directives and other country regulations as described in GS-22-008.
3. The housing will withstand exposure to 240 degree peak temperature for 10 seconds in a wave solder application.

Marking a), b) and c)
Letter type N 1041-402
Letter height max 2
Raised text, 0.15 0.03

a) Product number
b) Cavity number
c) Factory code

REV 1 2008 01 11

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406	ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED					mm	
Dr	W. Louwers	03/06/02	ANGULAR	LINEAR	0.x	±	size	Scale
Eng	G. Nys	30/06/02	0°	0°	0.xx	±	A2	3.532
Chr	W. Panis	30/06/02	0°	0°	0.xxx	±	ECN	DG09-0092
Appr	W. Panis	30/06/02	Product family		SOFIX		Spec ref	
FCI HOUSING							72640	Rev.
Customer p/n: SRJ 110 141/1								A
catalog no							customer	sheet 1 of 1

rev	ecn no	dr	date
A	DG09-0092	CLU	03/25/09
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-