


Model 72925
Do-It-Yourself 2mm Stackable Safety Sheathed Plug

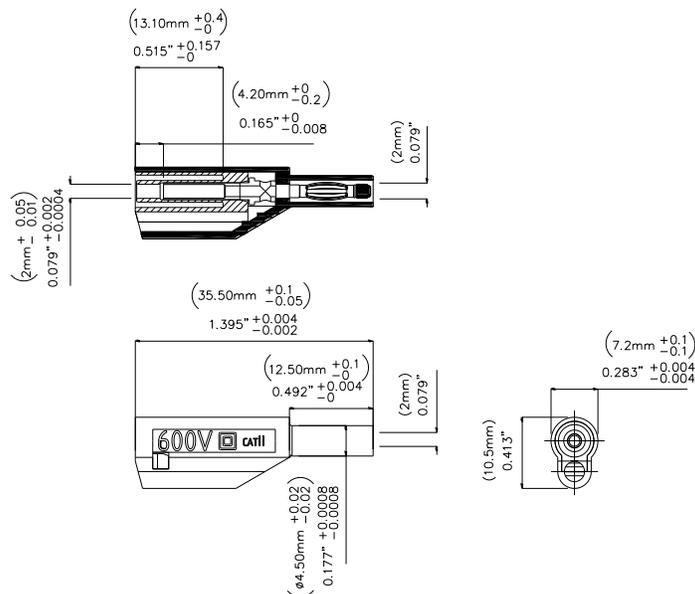

Features

- Build your own 2mm stackable test leads
- Plug spring is Beryllium Copper for long insertion life
- Safety rating CAT II 600V *when plug is correctly assembled and terminated.*

Materials

Plastic body: Polypropylene
 Plug body: Brass, Nickel Plated
 Spring: Beryllium Copper, Nickel Plated
 Spring Tip: Polysulfone

Specifications

Current	Max. 10A
Voltage	600 V CAT II
Max Resistance	Less than 5 mΩ

Ordering Information

Model **72925**-Color
 Colors: **-0** (black) and **-2** (red)

USA: Sales: 800-490-2361
 Technical Support: technicalsupport@pomonatest.com
 Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

[72925-0](#) [72925-2](#)