

## FEATURES AND SPECIFICATIONS



### Features and Benefits

- MIL-C-39012 compatible
- 50 and 75Ω versions available
- Stability under vibration and shock

See BNC and TNC Specifications Table on Page R-2  
For More Information

## molex® RF Coaxial Connectors TNC Series

### 73178/73179/73219 Straight Cable Plug

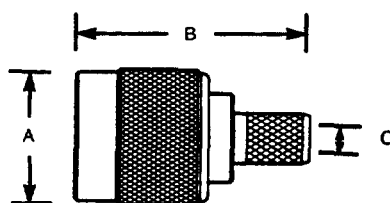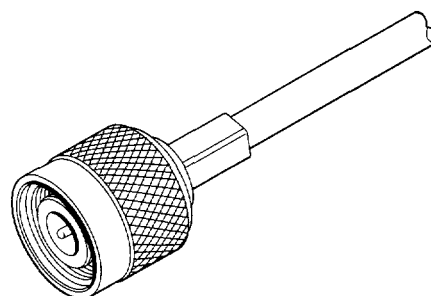

Crimp/Crimp

## ORDERING INFORMATION AND DIMENSIONS

| RG/U Cable | Order No.  | Contact Plating | Termination Style Body/Contact | Dimension    |              |             | Features            | Dielectric Materials |
|------------|------------|-----------------|--------------------------------|--------------|--------------|-------------|---------------------|----------------------|
|            |            |                 |                                | A            | B            | C           |                     |                      |
| 58,141     | 73178-5001 | Silver          | Crimp/Crimp                    | 14.50 (.571) | 25.30 (.100) | 3.20 (.125) | Captive Contact     | Polypropylene        |
| 58,141     | 73219-0023 | Gold            | Crimp/Crimp                    | 14.50 (.571) | 25.30 (.100) | 3.20 (.125) | Captive Contact     | Polypropylene        |
| 59,62      | 73179-5001 | Silver          | Crimp/Crimp                    | 14.50 (.571) | 25.30 (.100) | 3.90 (.153) | Captive Contact     | Polypropylene        |
| 59,62      | 73219-0043 | Gold            | Crimp/Crimp                    | 14.50 (.571) | 25.30 (.100) | 3.90 (.153) | 75Ω Captive Contact | Polypropylene        |