

MATERIALS AND FINISHES:

BODY, JAM NUT, CRIMP TUBE: BRASS
FINISH: NICKEL

CENTER CONTACT: BERYLLIUM COPPER
FINISH: GOLD



CABLE CONTACT: BRASS
FINISH: GOLD

LOCKWASHER: PHOS BRONZE
FINISH: NICKEL


INSULATOR, SPACER: TEFLON

GASKET: SILICONE RUBBER




SHRINK TUBE: VERSAFIT 3/16-0

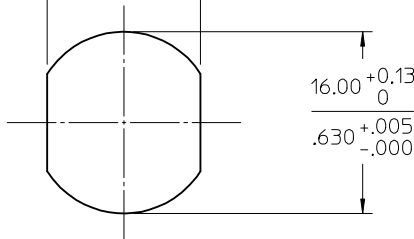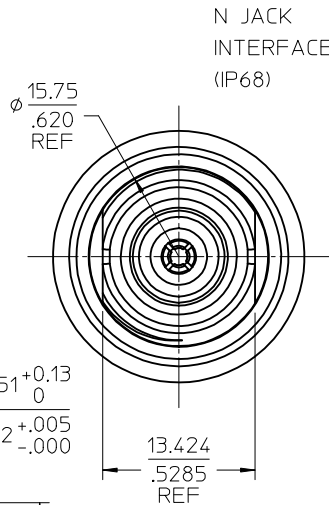



RECOMMENDED MOUNTING
HOLE PATTERN




N JACK
INTERFACE
(IP68)

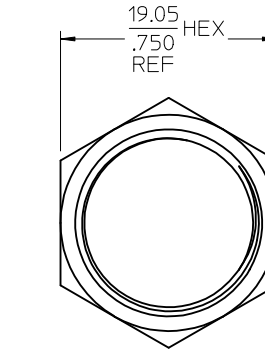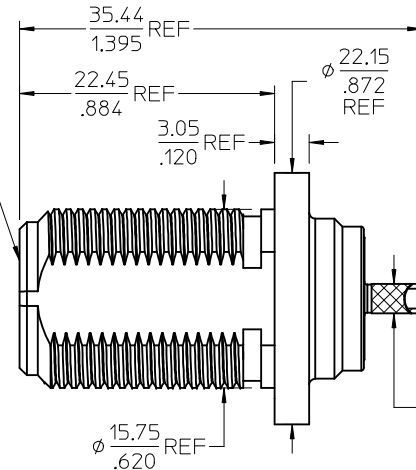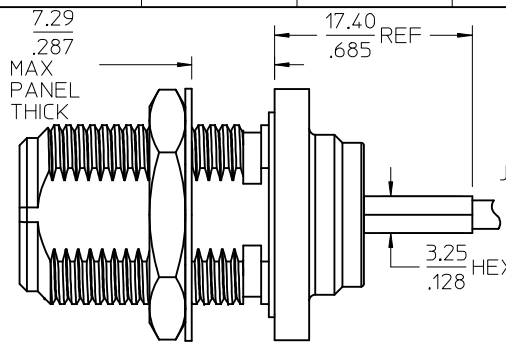


JAM NUT

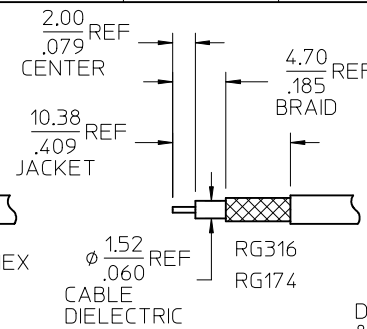


CONTACT




SPACER
-1502 ONLY

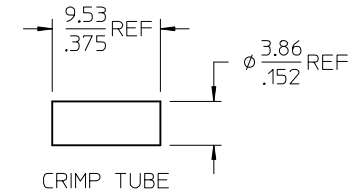

CRIMP TUBE

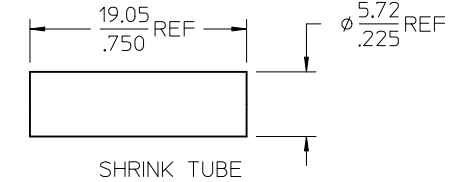

SHRINK TUBE

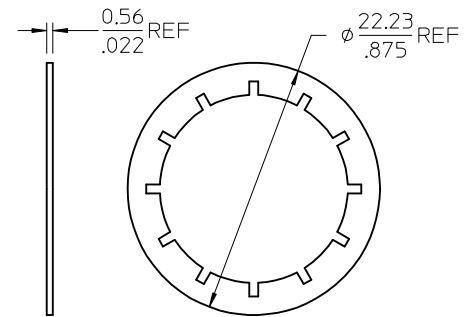

LOCKWASHER

MIL-STD-348A, FIG. 304.1	INTERFACE
SPECIFICATION	DESCRIPTION

73276-1502	BULK	1.613 / .0635	BELDEN
73276-1501	ONE PER BAG	1.613 / .0635	RG316
73276-1500	BULK	1.613 / .0635	RG316
PART NO.	PACKAGING	MM / IN	CABLE TYPE
		DIM A	

CHG: ADDED CRIMP
TUBE CALLOUT
EC NO: URF2014-0477
2014/02/18
DRWN:JLEE02
CHKD:SSS
2014/02/18
APPR:WSP INK
2014/02/20
REV
B1

QUALITY
SYMBOLS
=0
=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0005
3 PLACES	± .005	± .0005
2 PLACES	± .005	± .0005
1 PLACE	± .005	± .0005

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY
SSS
2008/01/15

CHECKED BY
AZR
2008/01/15

APPROVED BY
JDW
2008/01/15

MATERIAL NO.
SEE TABLE

SIZE
C

SCALE
INCH

DESIGN UNITS
INCH

THIRD ANGLE
PROJECTION

TITLE
N JACK IP68 BLKHD RM
RG316 BELDEN 7805
EWR-3517, N-JC/BLK

MOLEX INCORPORATED

DOCUMENT NO.
SD-73276-150

SHEET NO.
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION