


# Data sheet

## SMT Plug to FME Plug With 1.13 Cable

RS stock No: 7385923

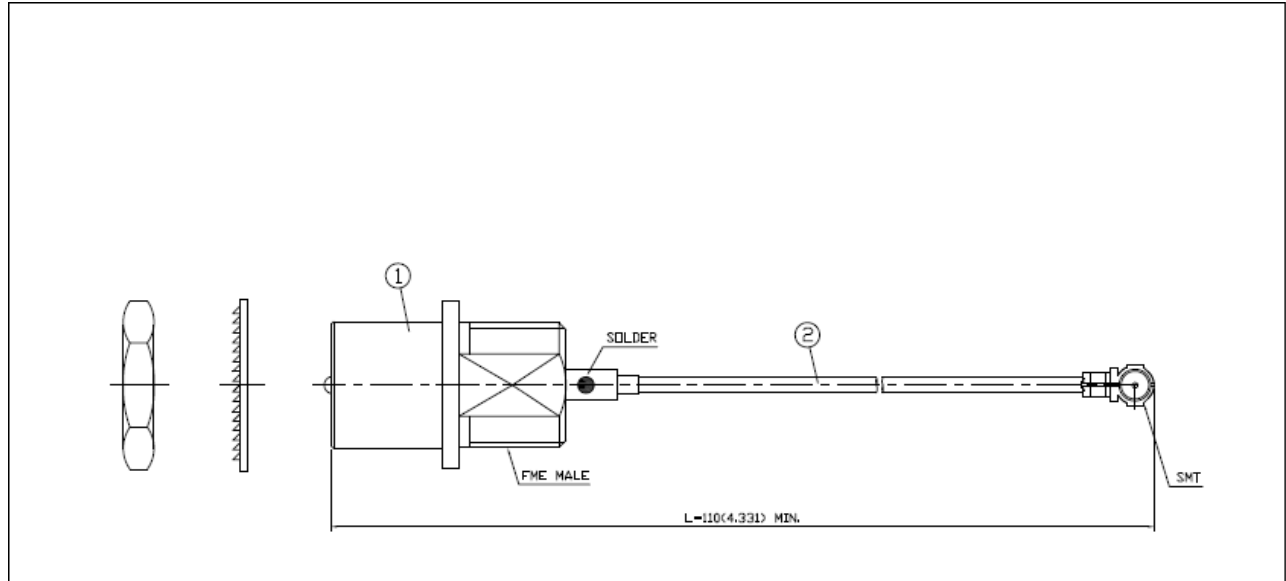

- 1.0 ELECTRICAL**  
 1.1 FREQUENCY RANGE: DC-1.8 GHz  
 1.2 NOMINAL IMPEDANCE: 50 OHM  
 1.3 WORKING VOLTAGE: 100 VOLTS MAX.  
 1.4 PROOF VOLTAGE: 200 VOLTS
- 2.0 MATERIALS**  
 2.1 BODIES: BRASS PER IS-C3604  
 PHOSPHOR BRONZE  
 2.2 CENTER CONTACT: BRASS PER IS-C3604  
 PHOSPHOR BRONZE  
 2.3 INSULATION: TAYLON PER ASTM D1457 AND ASTM D1710  
 PBI(DURANCE 3186),UL94V-0
- 3.0 FINISHES AND OTHERS**  
 3.1 SEE BELOW TABLE FOR DETAILS.
- 4.0 ENVIRONMENTAL**  
 4.1 OPERATING TEMPERATURE RANGE: -40° C TO +80° C

APPROVED by \_\_\_\_\_ DATE: \_\_\_\_\_

NO	DESCRIPTION	Q'TY	FINISH
2	SMT CONNECTOR	1	Ø1.13
1	23-38 Ø1.13 (500)	1	T.G.G/N

DESCRIPTION		FME BULKHEAD FRONT MOUNT PLUG + SMT PLUG WHIT Ø1.13 CABLE	
類別	DRAWN	TOLERANCE	品名
	Yoko	.X ±0.2	YK05-77
繪圖	CHECK	.XX ±0.1	UNIT
	Arc	.XXX ±0.05	mm(in)
總定	APPROVAL	ANGLE ±5°	SCALE
	Jenny		4:1
		DWG.NO. 99-0403	
		TITLE \ROHS COMPLIANT	
		日期	DATE 07.15.11
		版次	REV A-0

