


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	12/14/04	A.D.M.

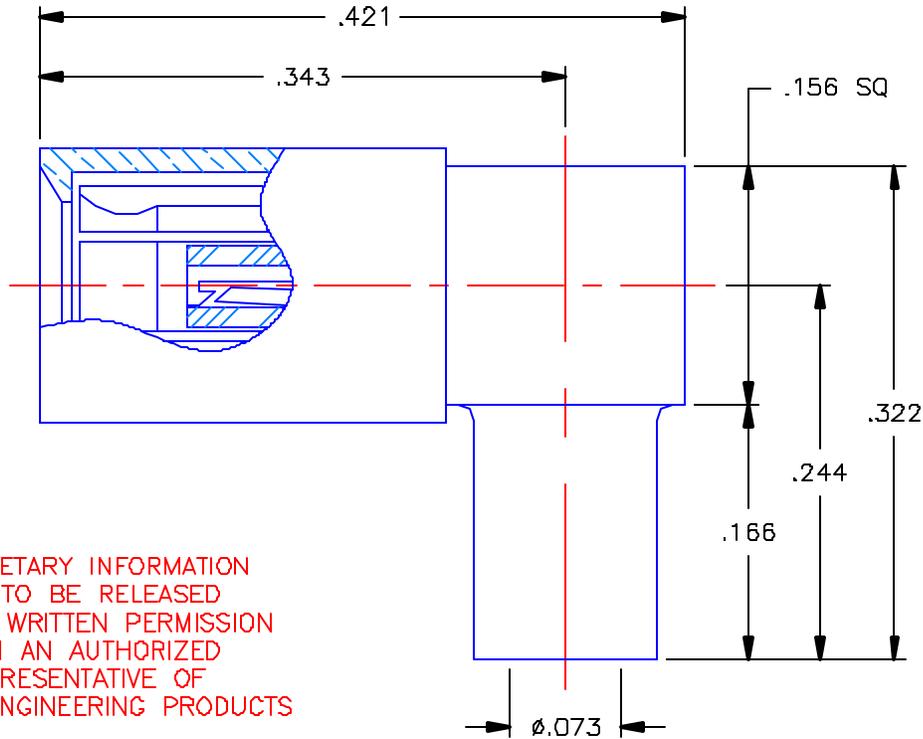

NOTES:

MATERIALS:

1. INTERFACE BODY & CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
2. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN. A.D.M.,	DATE 12/14/04	 APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Dr. New Haven, CT 06513
	CHKD: D.N.	DATE 12/14/04	
DECIMAL	ANGLE	APVD: D.J.C.	DATE 12/14/04
REFERENCE:		SSMB RIGHT ANGLE FEMALE PLUG DIRECT SOLDER TYPE FOR .070 S/R CABLE	
ORIGINATOR: A.D.M. DATE: 12/14/04		MATERIALS & FINISHES: SEE NOTES	SIZE: A FSCM NO: 19505 DWG NO: 7405-1561-022 SCALE: 8:1
			REV: - SHEET 1 OF 1

7405-1561-022