

	TYPE	NUMBER	
	PRODUCT SPECIFICATION	GS-12-130 (Was GES-12-130)	
TITLE	USB + Power Product Specification	PAGE	REVISION
		1 of 16	K
		AUTHORIZED BY	DATE
		XK ZHANG	07/05/10
		CLASSIFICATION	UNRESTRICTED

1.0 **OBJECTIVE**

This specification defines the performance, test, quality and reliability requirements of the USB+Power (Universal Serial Bus with keyed power terminals) including the following: Series "A" Right Angle

2.0 **SCOPE:**

This specification is applicable to the termination characteristics of the USB+ Power family of products, which provides interconnection of computer peripherals.

3.0 **GENERAL**

This document is composed of the following sections:

<u>Paragraph</u>	<u>Title</u>
1.	OBJECTIVE
2.	SCOPE
3.	GENERAL
4.	APPLICABLE DOCUMENTS
5.	REQUIREMENTS
5.1	Qualification
5.2	Product Examination
5.3	Material
5.4	Finish
5.5	Design and Construction
6.	ELECTRICAL CHARACTERISTICS
7.	MECHANICAL CHARACTERISTICS
8.	ENVIRONMENTAL CHARACTERISTICS
9.	QUALITY ASSURANCE PROVISIONS
9.1	Equipment Calibration
9.2	Inspection Conditions
9.3	Sample Quantity And Description
9.4	Acceptance
9.5	Qualification Testing
9.6	Re-qualification Testing
Figure 1	CONTACT RESISTANCE MEASUREMENT POINTS
Figure 2	SHOCK AND VIBRATION MOUNTING FIXTURE
Table 1	QUALIFICATION TESTING AND SEQUENCE MATRIX

	TYPE	PRODUCT SPECIFICATION		NUMBER	GS-12-130 (Was GES-12-130)	
	TITLE USB + Power Product Specification			PAGE	2 of 16	
				REVISION	K	
				AUTHORIZED BY	XK ZHANG	
			DATE	07/05/10		
			CLASSIFICATION UNRESTRICTED			

4.0 APPLICABLE DOCUMENTS

4.1 Specifications:

4.1.1 Engineering Drawings

55917, 57489, 10063583	USB + Power Receptacle Assembly
74233, 57496	USB + Power Plug Assembly

4.2 Military Standards:

4.2.1 MIL-STD-202F:	Test Methods for Electronic Component Parts
4.2.2 MIL-STD-1344A:	Test Methods for Electrical Connectors
4.2.3 MIL-C-45662:	Equipment Calibration

4.3 Federal Specifications:

4.3.1 QQ-N-290:	Nickel Plating (Electrodeposited)
4.3.2 QQ-B-750:	Phosphor Bronze Alloy Strip
4.3.3 QQ-S-571:	Solder

4.4 Other Standards and Specifications:

4.4.1 UL94:	Flammability
4.4.2 ASTM B-103:	Phosphor Bronze
4.4.3 ISO 9000:	
4.4.4 EIA 364:	Electrical connector/socket test procedures including environmental classifications
4.4.5 ASTM-D-4565:	Physical and Environmental Performance Properties of Insulation and Jacket for Telecommunications Wire and Cable, Test Standard Method
4.4.6 ASTM-D-4566:	Electrical Performance Properties of Insulation and Jacket for Telecommunication Wire and Cable, Test Standard Method
4.4.7 USB	Universal Serial BUS Specification

4.5 Berg Specifications:

4.5.1 BUS-03-114:	Capacitance Measurement
4.5.2 BUS-03-404:	Normal Force Measurement
4.5.3 BUS-03-405:	Insertion/Withdrawal Force Measurement
4.5.4 BUS-03-601:	Current Rating/30° Temperature Rise
4.5.5 BUS-16-016:	Phosphor Bronze Strip
4.5.6 BUS-16-074:	PCT, 30% glass
4.5.7 BUS-19-002:	Solderability
4.5.8 BUS-19-020:	Porosity
4.5.9 BUS-19-040:	Plating Adhesion
4.5.10 BUS-19-002:	Surface Mount Solder Joint Reliability
4.5.11 BUS-19-122:	Solder Joint Reliability Test Procedure for Surface Mount Connectors

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001

	TYPE	NUMBER	
	PRODUCT SPECIFICATION	GS-12-130 (Was GES-12-130)	
TITLE	USB + Power Product Specification	PAGE	REVISION
		3 of 16	K
		AUTHORIZED BY	DATE
		XK ZHANG	07/05/10
		CLASSIFICATION	
		UNRESTRICTED	

5.0 REQUIREMENTS

5.1 Qualification

Connectors furnished under this specification shall be capable of meeting the qualification test requirements specified herein.

5.2 Product Examination

Product will be examined per EIA-364-18 verifying visually paragraphs 5.3, 5.4, and 5.5. Dimensional examination is not required.

5.3 Material

Material for each part shall be specified herein, or equivalent. Substitute material shall meet the performance requirements of this specification.

5.3.1 Receptacle and Plug Terminal - The material shall be high strength copper alloy strip.

5.3.2 Receptacle and Plug Insulator Housings and Covers - Connectors shall be molded of plastic that is rated UL94-V-0 or better in accordance with UL-94.

5.3.3 Receptacle and Plug Shell - The base material shall be phosphor-bronze strip.

5.3.4 Insulator housings and covers of lead free part - The insulator housings and covers of lead free part will withstand exposure to 260 °C peak temperature for 40 seconds in a convection, infra-red or vapor phase reflow oven. For 10063583, it also can withstand exposure to 260 °C peak temperature for 10 seconds for 3 times.

5.3.5 Lead free products – All lead free products are RoHS compatible.

5.4 Finish

5.4.1 Receptacle and Plug terminals - shall be plated in the contact area with 0,76um (30 μinches) palladium nickel with gold flash minimum over 1,27um (50 μinches) minimum nickel. The receptacle terminal solder tail sections shall be plated with 2,54um (100 μinches) 90/10 tin-lead minimum or 2,54um (100 μinches) minimum matted tin for lead free part over 1,27um (50 μinches) minimum nickel. The terminal areas outside of the contact areas and the solder tail areas shall be plated with 1,27um (50 μinches) nickel minimum.

5.4.2 Outside shells - shall be plated with 2, 00um (75μinches) minimum 90/10 bright tin-lead over 1,27um (50 μinches) minimum nickel underplate or 2, 00um (75μinches) minimum bright tin over 1,27um (50 μinches) minimum nickel underplate or only 1.27um (50 micro inches) minimum nickel.

5.4.3 Lead free plating - All plating chemical for lead free part are qualified by FCI. FCI qualification include solderability, whiskering, solder joint reliability and tarnishing effects.

5.5 Design and Construction

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001

	TYPE	NUMBER		
	PRODUCT SPECIFICATION	GS-12-130 (Was GES-12-130)		
		TITLE	PAGE	REVISION
		USB + Power Product Specification	4 of 16	K
		AUTHORIZED BY	DATE	
		XK ZHANG	07/05/10	
		CLASSIFICATION		
		UNRESTRICTED		

- 5.5.1 Receptacle connector - is a multiple piece assembly having a lower single row of contacts (USB standard terminals) spaced on dissimilar centerlines (the two inner contacts are spaced 2.0mm apart and the terminals adjacent to these terminals are spaced 2.5mm away) in the interface area. The Upper row of contacts used for power transmission is spaced 2.5mm apart. Each terminal transition will be a 90 degree bend to allow for termination to the PC board by a through hole leg. The outside shell has six resilient contact arms (four on the sides and two on the bottom) that act as ESD grounding as well as cable plug retention features. The two arms on the side of the shell assure that there is constant contact between the shell and the shell of the cable assembly plug while the connectors are mated. The receptacle is has a recess to accommodate the spring latch on the plug connector. The entire receptacle assembly is attached to the printed circuit board via four retention claws on the outside shell. The connector has four keys for various supply voltages. Refer to the Customer Drawing for recommended P.C. Board thickness and keying positions.
- 5.5.2 The plug connector - is a multiple piece assembly having a lower single row of contacts (USB standard terminals) spaced on dissimilar centerlines (the two inner contacts are spaced 2.0mm apart and the terminals adjacent to these terminals are spaced 2.5mm away) in the interface area. The Upper row of contacts used for power transmission is spaced 2.5mm apart. Each terminal is straight and is soldered to the cable connectors. The connector is fitted with two shells. The front shell when mated with the receptacle is in contact with the resilient contact arms of the receptacle providing EMI protection. The rear shell provides EMI protection as well as clamps to the cable providing a specified cable strain relief pull force. The outside shell has six resilient contact arms (four on the sides and two on the bottom) that act as ESD grounding as well as cable plug retention features. The two arms on the side of the shell assure that there is constant contact between the shell and the shell of the cable assembly plug while the connectors are mated. A plastic spring latch on top of the connector positively latches into the receptacle connector when mated. The connector provides four keying positions for various supply voltages. Refer to the Customer Drawing keying positions.
- 5.5.3 Mating - The connectors shall be capable of mating and unmating manually without the use of special tools.
- 5.5.4 Workmanship - Connectors shall be uniform in quality and shall be free from burrs, scratches, cracks, voids, chips, blisters, pin holes, sharp edges, other defects, debris and any ingress of foreign material that will adversely affect life or serviceability.
- 5.5.5 Temperature Rating - The receptacle connector shall be capable of withstanding a storage temperature range of -55°C to 85°C and an operating temperature range of -55°C to 85°C.

6.0 ELECTRICAL CHARACTERISTICS

6.1 Low Level Contact Resistance(LLCR)

- | | | |
|-------|----------------------|---|
| 6.1.1 | Test Standard: | EIA 364-23 |
| 6.1.2 | Acceptance Criteria: | 30mΩ max. |
| 6.1.3 | Connection Method: | Attach current and voltage leads as shown in Figure 1 for p/n 55917, 74233/ Figure 3 for p/n 57489, 57496 |

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001

	TYPE PRODUCT SPECIFICATION	NUMBER GS-12-130 (Was GES-12-130)	
TITLE USB + Power Product Specification		PAGE 5 of 16	REVISION K
		AUTHORIZED BY XK ZHANG	DATE 07/05/10
CLASSIFICATION UNRESTRICTED			

6.2 Insulation Resistance

6.2.1	Test Standard:	EIA 364-21
6.2.2	Acceptance Criteria:	>1000 megohms, mated and unmated
6.2.3	Test Voltage:	500 volts DC
6.2.4	Electrification Time:	2 minutes
6.2.5	Measurement Points:	Between adjacent contacts and between contacts shell

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001

	TYPE PRODUCT SPECIFICATION	NUMBER GS-12-130 (Was GES-12-130)	
TITLE USB + Power Product Specification	PAGE 6 of 16		REVISION K
	AUTHORIZED BY XK ZHANG		DATE 07/05/10
	CLASSIFICATION UNRESTRICTED		

6.3 Dielectric Withstanding Voltage

6.3.1	Test Standard:	EIA 364-20, Method A
6.3.2	Acceptance Criteria:	No evidence of arc-over, insulation breakdown, or excessive current leakage(> 1 mA) mated and unmated connectors
6.3.3	Test Voltage:	750 volts AC, 60
6.3.4	Test Barometric Pressure:	760mm Hg, Sea level

6.4 Current Rating

6.4.1	Test Standard:	BUS-03-601
6.4.2	Acceptance Criteria:	30° C Max. delta T any point.
6.4.3	Test Methods:	<u>USB Section:</u> With all contacts energized 1.5 Amp per contact <u>Power Section:</u> With all contacts energized, 3.0 Amps per contact. Note: All contacts to be energized for this test
6.4.4	Ambient Conditions:	Still air at 25 degrees C.

6.5 Capacitance

6.5.1	Test Standard:	EIA 364-30
6.5.2	Acceptance Criteria:	2 pF max.
6.5.3	Ambient Conditions:	Still air at 25 degrees C.
6.5.4	Frequency:	1 kHz (default 1 MHz)
6.5.5	Points of Measurement	Between adjacent contacts in an unmated connector

7.0 MECHANICAL CHARACTERISTICS

7.1 Mating/Unmating Force

7.1.1	Test Standard:	EIA 364-13
7.1.2	Acceptance Criteria:	
7.1.2.1	Mating:	<66.0 N (15 Lb.) per plug
7.1.2.2	Unmating:	<44.0 N (10 Lb.) per plug after latch is unlatched
7.1.3	Cross Head Speed:	1 inch per minute
7.1.4	Mounting:	Free floating fixtures

7.2 Contact Retention

7.2.1	Test Standard:	EIA 364-29
7.2.2	Acceptance Criteria:	Axial Load > 0.5 pounds without dislodging
7.2.3	Application Rate:	0.2 inches/minute

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001

	TYPE	PRODUCT SPECIFICATION		NUMBER	GS-12-130 (Was GES-12-130)	
	TITLE USB + Power Product Specification			PAGE	7 of 16	
				REVISION K		
				AUTHORIZED BY XK ZHANG	DATE 07/05/10	
			CLASSIFICATION UNRESTRICTED			

7.3 Latch Pull Force

7.3.1	Test Standard:	EIA 364-13
7.3.2	Acceptance Criteria:	Mated condition Multi-directional <66.0 N (15 Lb.) without loss of continuity and without causing visible physical damage to the receptacle and plug
7.3.3	Application Rate:	0.2 inches/minute

7.4 Cable Pull Out

7.4.1	Test Standard:	EIA 364-46
7.4.2	Acceptance Criteria:	Axial pull without loss of continuity, No jacket tears or visual exposure of shield. No jacket movement greater than 1.5 mm at point of exit
7.4.3	Application Rate:	Plug Unmated condition Cable Axial-directional <132.0 N (30 Lb.) 0.2 inches/minute

7.5 Cable Flexing

7.5.1	Test Standard:	EIA 364-41, Condition I: dim x=3.7 x cable diameter or thickness; 100 cycles in each of two planes
7.5.2	Acceptance Criteria:	No discontinuities, DWV, IR,
7.5.3	Application Rate:	Mated Condition Cable

8.0 ENVIRONMENTAL CONDITIONS

Acceptance Criteria - After exposure to the following environmental conditions in accordance with the specified test procedure and/or details, the product shall show no physical damage and shall meet the electrical and mechanical requirements per paragraphs 6.0 and 7.0 as specified in the Table 1. Unless specified otherwise, **assemblies shall be mated** during exposure.

8.1 Thermal Shock

8.1.1	Test Standard:	EIA 364-32, Test Condition I
8.1.2	Number of Cycles:	5
8.1.3	Time at each Temperature:	30 minutes
8.1.4	Transfer Time:	5 minutes maximum

8.2 Temperature & Humidity

8.2.1	Test Standard:	As specified below
8.2.2	High Temperature/Humidity:	60+/-3 degrees C @ 90-95 RH
	Low Temperature/Humidity:	25+/-3 degrees C @ 55 +/- 10% RH
8.2.3	Cycle times:	8 hours total
		1.75 hours @ Low, 1.5 ramp up, 4 hours @ high, .75 hour ramp down

8.3 High Temperature Life

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001

	TYPE	PRODUCT SPECIFICATION		NUMBER	GS-12-130 (Was GES-12-130)			
	TITLE USB + Power Product Specification			PAGE	8 of 16	REVISION	K	
				AUTHORIZED BY	XK ZHANG		DATE	07/05/10
				CLASSIFICATION UNRESTRICTED				

8.3.1 Test Standard: EIA 364-17, Test Condition 3, Method A
 8.3.2 Test Temperature: 85 degrees C
 8.3.3 Test Duration: 250 hours

8.4 Industrial Mixed Flowing Gas (IMFG)

8.4.1 Test Standard: EIA 364-65, Class: III
 8.4.2 Duration: 7 days
 8.4.3 Condition: Mated connectors

8.5 Vibration, Random

8.5.1 Test Standard: EIA 364-28, Test Condition: V ,Test Letter A
 8.5.2 Acceptance Criteria: No discontinuities greater than 1 microsecond
 8.5.3 Duration: 15 minutes along each of three orthogonal axes
 8.5.4 Mounting: See Figure 2 for p/n 55917, 74233/ Figure 4 for p/n 57489, 57496

8.6 Mechanical Shock

8.6.1 Test Standard: EIA 364-27, Condition: H
 8.6.2 Acceptance Criteria: No discontinuities greater than 1microseconds
 8.6.3 Mounting: See Figure 2

8.7 Durability

8.7.1 Test Standard: Standard laboratory procedure as applicable to the specific product, Latch removed
 8.7.2 Number of Cycles: 1500 cycles
 8.7.3 Cycling Rate: 200 cycles/hour Maximum

8.8 Solderability

8.8.1 Test Standard: ANSI-J-002, Test Condition A
 8.8.2 Acceptance Criteria: Meets ANSI-J-002 requirements
 8.8.3 Steam Aging: 4 hours

8.9 Resistance to Solder Heat

8.9.1 Test Standard:
 8.9.1.1 Thru Hole EIA 364-56,Procedure 3,Condition E
 8.9.1.2 Surface Mount EIA 364-56,Procedure 5, Level 3
 8.9.2 Acceptance Criteria: There shall be no evidence of physical or mechanical damage

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001

	TYPE	PRODUCT SPECIFICATION		NUMBER	GS-12-130 (Was GES-12-130)		
	TITLE USB + Power Product Specification			PAGE	9 of 16	REVISION	K
				AUTHORIZED BY	XK ZHANG	DATE	07/05/10
				CLASSIFICATION UNRESTRICTED			

8.10 Resistance to Solvents

8.10.1	Test Standard:	EIA 364-11, Class IV
8.10.2	Acceptance Criteria:	No evidence of physical or mechanical damage
8.10.3	Solvent Temperature:	25 C
8.10.4	Immersion Time:	3 minutes

9.0 QUALITY ASSURANCE PROVISIONS

9.1 Equipment Calibration

All test equipment and inspection facilities used in the performance of any test shall be maintained in a calibration system in accordance with MIL-C-45662 and ISO 9000.

9.2 Inspection Conditions

Unless otherwise specified herein, all inspections shall be performed under the following ambient conditions:

9.2.1	Temperature:	25 +/- 5 degrees C
9.2.2	Relative Humidity:	30% to 60%
9.2.3	Barometric Pressure:	Local ambient

9.3 Sample Quantity and Description

Total Receptacles: 52
Total Plugs 57

9.3.1	Groups 1, 2, 7:	8 samples in each group (8 receptacles, 8 plugs)
9.3.2	Groups 3, 5, 6:	5 samples in each group (5 receptacles, 5 plugs)
9.3.3	Group 4:	3 samples in group (3 receptacles, 3 plugs)
9.3.4	Group 8, 9:	5 samples in group (5 receptacles, 5 plugs)
9.3.5	Group 10:	5 samples in group (5 plugs)

Note: Group 3: Receptacle is loose piece and not mounted to the test board

9.4 Acceptance

9.4.1 Electrical and mechanical requirements placed on test samples as indicated in paragraphs 6.0 and 7.0 shall be established from test data using appropriate statistical techniques or shall otherwise be customer specified, and all samples tested in accordance with this product specification shall meet the stated requirements.

9.4.2 Failures attributed to equipment, test set-up, or operator error shall not disqualify the product. If product failure occurs, corrective action shall be taken and samples resubmitted for qualification.

9.5 Qualification Testing - Qualification testing shall be performed on sample units produced with equipment and procedures normally used in production. The test sequence shall be as shown in Table 1.

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001

	TYPE PRODUCT SPECIFICATION	NUMBER GS-12-130 (Was GES-12-130)	
TITLE USB + Power Product Specification	PAGE 10 of 16	REVISION K	
	AUTHORIZED BY XK ZHANG	DATE 07/05/10	
	CLASSIFICATION UNRESTRICTED		

9.6 Re-qualification Testing - If any of the following conditions occur, the responsible product engineer shall initiate re-qualification testing consisting of all applicable parts of the qualification test matrix (Table 1).

- 9.6.1 A significant design change is made to the existing product which impacts the product form, fit or function. Examples of significant changes shall include, but not be limited to, changes in the plating material composition or thickness, contact force, contact surface geometry, insulator design, contact base material, or contact lubrication requirements.
- 9.6.2 A significant change is made to the manufacturing process which impacts the product form, fit or function.
- 9.6.3 A significant event occurs during production or end use requiring corrective action to be taken relative to the product design or manufacturing process.

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001



TYPE

PRODUCT SPECIFICATION

NUMBER

GS-12-130
(Was GES-12-130)

TITLE

USB + Power Product Specification

PAGE

11 of 16

REVISION

K


AUTHORIZED BY

XK ZHANG

DATE

07/05/10

CLASSIFICATION

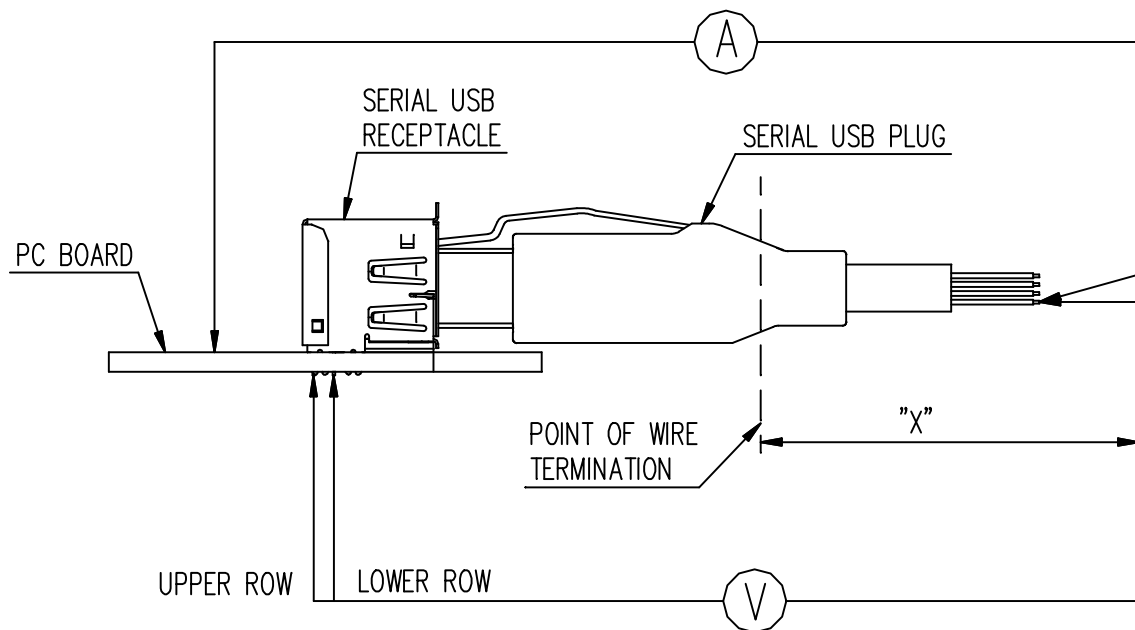UNRESTRICTED

NOTE: SUBTRACT BULK WIRE RESISTANCE OF LENGTH "X" FROM MEASUREMENTS

FIGURE 1
CONTACT RESISTANCE MEASUREMENT
POINTS

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001



TYPE

PRODUCT SPECIFICATION

NUMBER

GS-12-130
(Was GES-12-130)

TITLE

USB + Power Product Specification

PAGE

12 of 16

REVISION

K

AUTHORIZED BY

XK ZHANG

DATE

07/05/10

CLASSIFICATION


UNRESTRICTED

FIGURE 2
SHOCK AND VIBRATION MOUNTING FIXTURE

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001

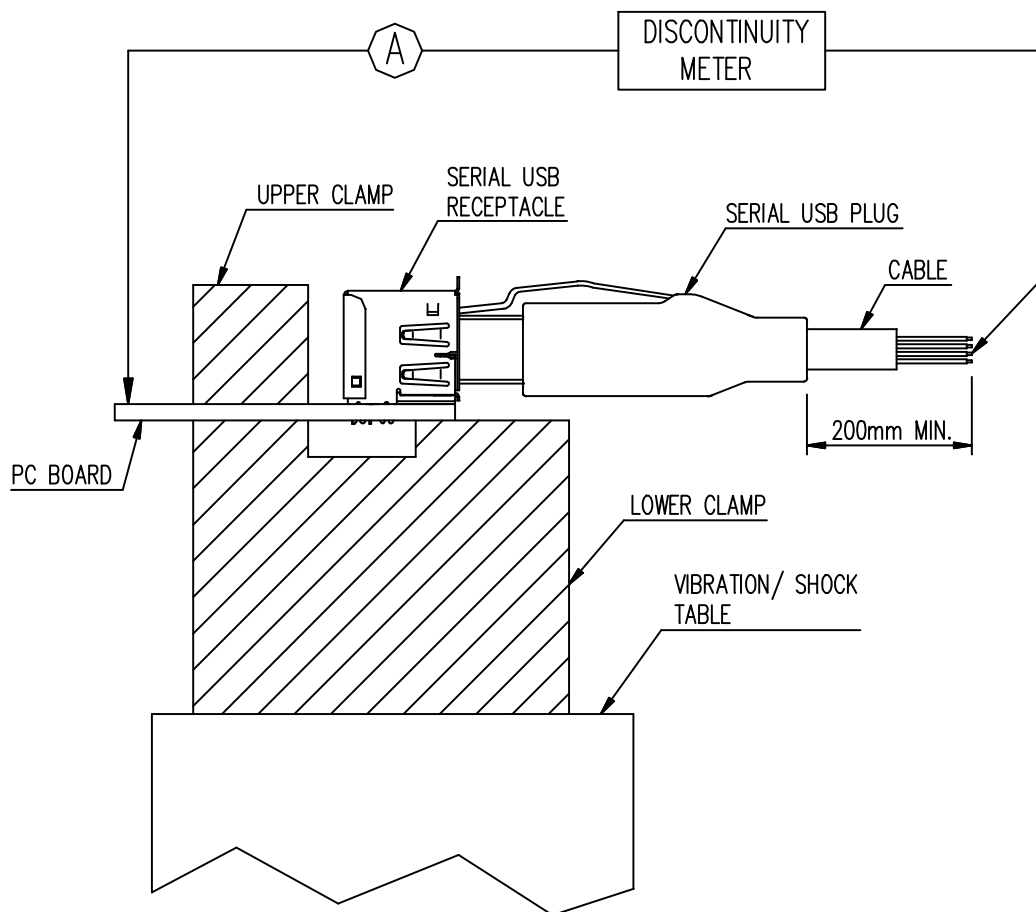

TYPE

PRODUCT SPECIFICATION

NUMBER

GS-12-130
(Was GES-12-130)

TITLE

USB + Power Product Specification

PAGE

13 of 16

REVISION

K


AUTHORIZED BY

XK ZHANG

DATE

07/05/10

CLASSIFICATION

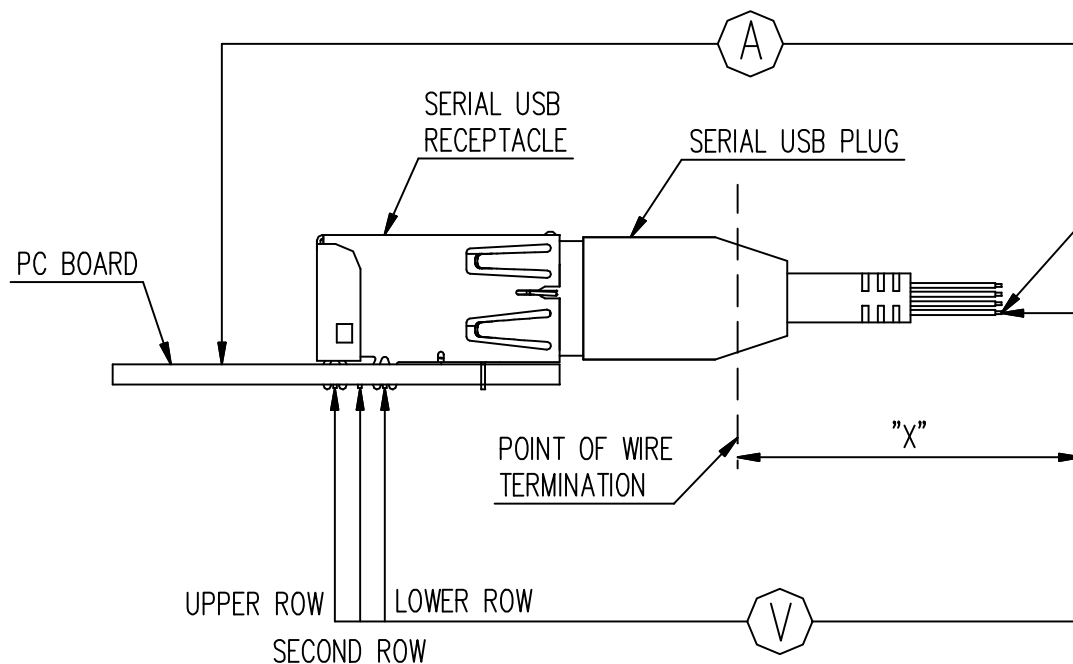UNRESTRICTED

NOTE: SUBTRACT BULK WIRE RESISTANCE OF LENGTH "X" FROM MEASUREMENTS

FIGURE 3
CONTACT RESISTANCE MEASUREMENT
POINTS

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001



TYPE

PRODUCT SPECIFICATION

NUMBER

GS-12-130
(Was GES-12-130)

TITLE

USB + Power Product Specification

PAGE

14 of 16

REVISION

K

AUTHORIZED BY

XK ZHANG

DATE

07/05/10

CLASSIFICATION

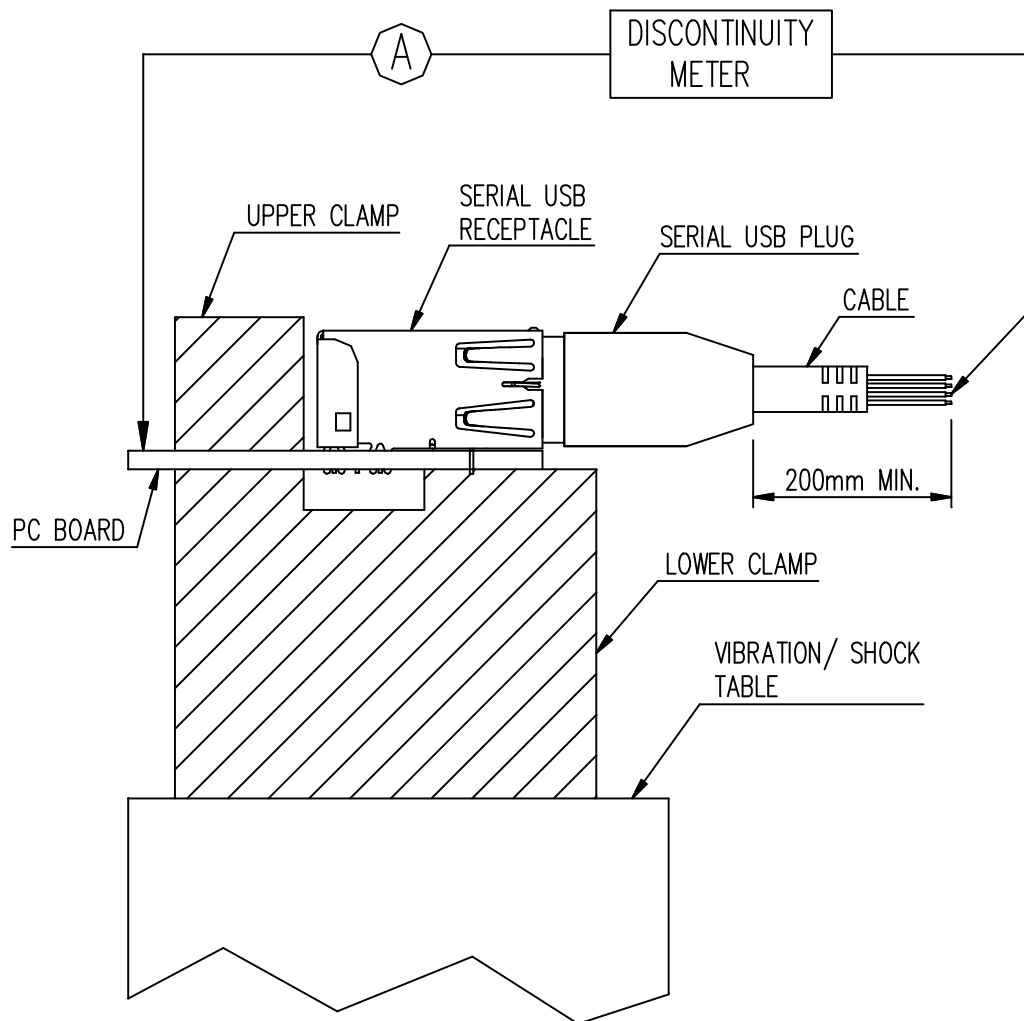
UNRESTRICTED

FIGURE 4
SHOCK AND VIBRATION MOUNTING FIXTURE

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001

	TYPE	PRODUCT SPECIFICATION		NUMBER	GS-12-130 (Was GES-12-130)	
	TITLE USB + Power Product Specification			PAGE	15 of 16	REVISION K
				AUTHORIZED BY XK ZHANG	DATE 07/05/10	
				CLASSIFICATION UNRESTRICTED		

Qualification Testing and Sequence Matrix

See paragraph. 9.3 for quantities

Test Procedure	Para	1	2	3	4	5	6	7	8	9	10
Product Examination	5.2	1,11	1,7	1,5,11 (C)	1,3	1,3	1,4	1,5	1,3	1,5	1,3
Contact Resistance	6.1	3,5,8, 10	2,4,6					2,6			
Insulation Resistance	6.2			3,10 (C)						2,6	
Dielectric Withstanding Voltage	6.3			4,9 (C)						3,7	
Current Rating	6.4				2						
Capacitance	6.5			2,8 (C)							
Mating / Unmating Forces	7.1	2,9									
Contact Retention	7.2		8 (B)								
Thermal Shock	8.1			6				3 (D)			
Temperature and Humidity	8.2			7				5(E)			
High Temperature Life	8.3		5								
Ind. Mixed Flowing Gas	8.4							4			
Vibration	8.5	6									
Mechanical Shock	8.6	7									
Durability	8.7	4	3(A)								
Solderability	8.8					2					
Resistance to Soldering Heat	8.9						2				
Resistance to Solvents	8.10						3				
Latch Test	7.3								2		
Cable Flex Test	7.4									4	
Cable Pull Out	7.5										2
(A) Condition samples with 10 cycles of durability											
(B) Testing to be done on loose piece (un-terminated) connector that has been exposed to high temperature life testing											
(C) Loose piece parts used for this testing											
(D) Condition samples with 5 cycles of durability											
(E) Test durability 7 days only											

Table 1
Qualification Testing and
Sequence Matrix

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001

	TYPE	PRODUCT SPECIFICATION		NUMBER	
				GS-12-130 (Was GES-12-130)	
		TITLE		PAGE	REVISION
				16 of 16	K
USB + Power Product Specification		AUTHORIZED BY	DATE		
		XK ZHANG	07/05/10		
		CLASSIFICATION			
		UNRESTRICTED			

REVISION RECORD

<u>REV</u>	<u>PAGE</u>	<u>DESCRIPTION</u>	<u>EC #</u>	<u>DATE</u>
A	All	Released	V81785	9/29/98
B	All	Removed group 7 from matrix Renamed groups 8,9,10,11 to 7,8,9,10, Decreased quantity of group 4 from 9 to 3 Paragraph 9.3 Quantities were Total Receptacles 63, Total plugs 68	V82003	11/04/98
C	ALL	Para. 7.1 Changed from >44.0 N to < 44.0 N Para 7.1.2 Added without causing visible physical damage to the receptacle.	V01739	08/03/00
D	ALL	Para 7.3.2 Added without causing visible physical damage to the plug and receptacle.	V01775	08/28/00
E	ALL	Guardian Site Transfer To Taiwan.	T20205	08/14/02
F	ALL	Add Figure 3&4 to describe electrical test	T20276	09/10/02
G	ALL	Update current rating	T04-0101	03/05/04
H	3	5.4.1 Add "or 2,54um (100 μinches) minimum matted tin for lead free part"	N04-0072	10/21/04
	3	5.4.2 Add "or 2,00um (75 μinches) minimum matted tin for lead free part"	N04-0072	10/21/04
	3	Add 5.3.4 Insulator housings and covers of lead free part	N04-0072	10/21/04
	3	Add 5.4.3 lead free plating	N04-0072	10/21/04
	3	Add 5.3.5 lead free part material	N04-0072	10/21/04
J	2	4.1.1 Add engineering drawing 10063583	N06-0234	09/05/06
	3	5.4.2 Add plating option: only nickel	N06-0234	09/05/06
H	4	5.5.5 Change the storage temperature range from -40oC~~60oC to -55oC~~85oC.And change the operating temperature range from 0oC~~40oC to -55oC~~85oC.	N10-0120	07/05/10

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI Electronics. No part of the information shown on this document may be used in any way without the written consent of FCI Electronics.

Form E-3005
Rev A 02/12/01
V20603

GS-01-001

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI:](#)

55917-100	55917-501LF	74233-101LF	74233-100LF	74233-102LF	74233-201LF	74233-202LF	74233-300LF
55917-500LF	55917-600LF	55917-601LF	55917-700LF	74233-301LF	74233-302LF	10083511-Z0050YYLF	
10083511-Z0100YYLF	10083511-Z0300YYLF	10083511-Z0500YYLF	10083512-Z0050YYLF	10083512-Z0100YYLF			
10083512-Z0300YYLF	10083512-Z0500YYLF	10084088-Z0050YYLF	10084088-Z0100YYLF	10084089-Z0050YYLF			
10084089-Z0100YYLF	10084089-Z0500YYLF	10089743-Z0050YYLF	10089743-Z0300YYLF	10089743-Z0500YYLF			
10089745-Z0050YYLF	10089745-Z0100YYLF	10089745-Z0300YYLF	10089745-Z0500YYLF	74233-200LF			
10084089-Z0300YYLF	10084088-Z0300YYLF	10089743-Z0100YYLF	55917-001LF	10116136-001LF			