



Item no.: 745-162
 Product description: Terminal strip with jumper slot 2 SOLDER PINS / POLE 12
 POLE PIN SPACING 7.5 MM / 0.295 IN WITHOUT FIXING
 FLANGE

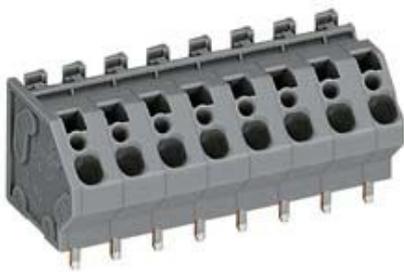

Produkt kann von Bild abweichen / product may differ

Packing unit 20 pieces

RoHS compliant

Product group	4 (Printed Circuit)
Weight	29.954 g
Color	gray
No. of connection Points	12
No. of potentials	12
pole count	12
Height	19 mm
Height	0.748 in
Width	89 mm
Width	3.504 in
Depth	22.9 mm
Depth	0.902 in
Pin spacing from	7.5 mm
Pin spacing from	0.295 in
Pollution degree	2
Measured voltage EN	630 V
Measured shock voltage	6 kV
Current intensity EN	32 A

Pollution degree	2
Measured voltage EN	1000 V
Measured shock voltage	6 kV
Current intensity EN	32 A



Connection method	CAGE CLAMP® CONNECTION
Cross section [mm ²]	0.08 - 4 mm ²
Wiring method	solid
Cross section [mm ²]	0.08 - 4 mm ²
Cross section [mm ²]	0.25 - 2.5 mm ²
Cross section [mm ²]	0.25 - 2.5 mm ²
Cross section [AWG]	28 - 12 AWG
Strip length from	8 mm
Strip length to	9 mm
Material group	I
xxx-xxx/000-006	blue
xxx-xxx/000-009	light gray
xxx-xxx/000-016	green-yellow
xxx-xxx/000-017	light green
xxx-xxx/005-000	with fixing flange
xxx-xxx/005-xxx	with fixing flange



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
745-162	CCA	NL5831	630	32	0,08-4
745-162	cURus	E45172	300	20	28-12
745-162	KEMA	2076500.01	630	32	0,08-4

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected