
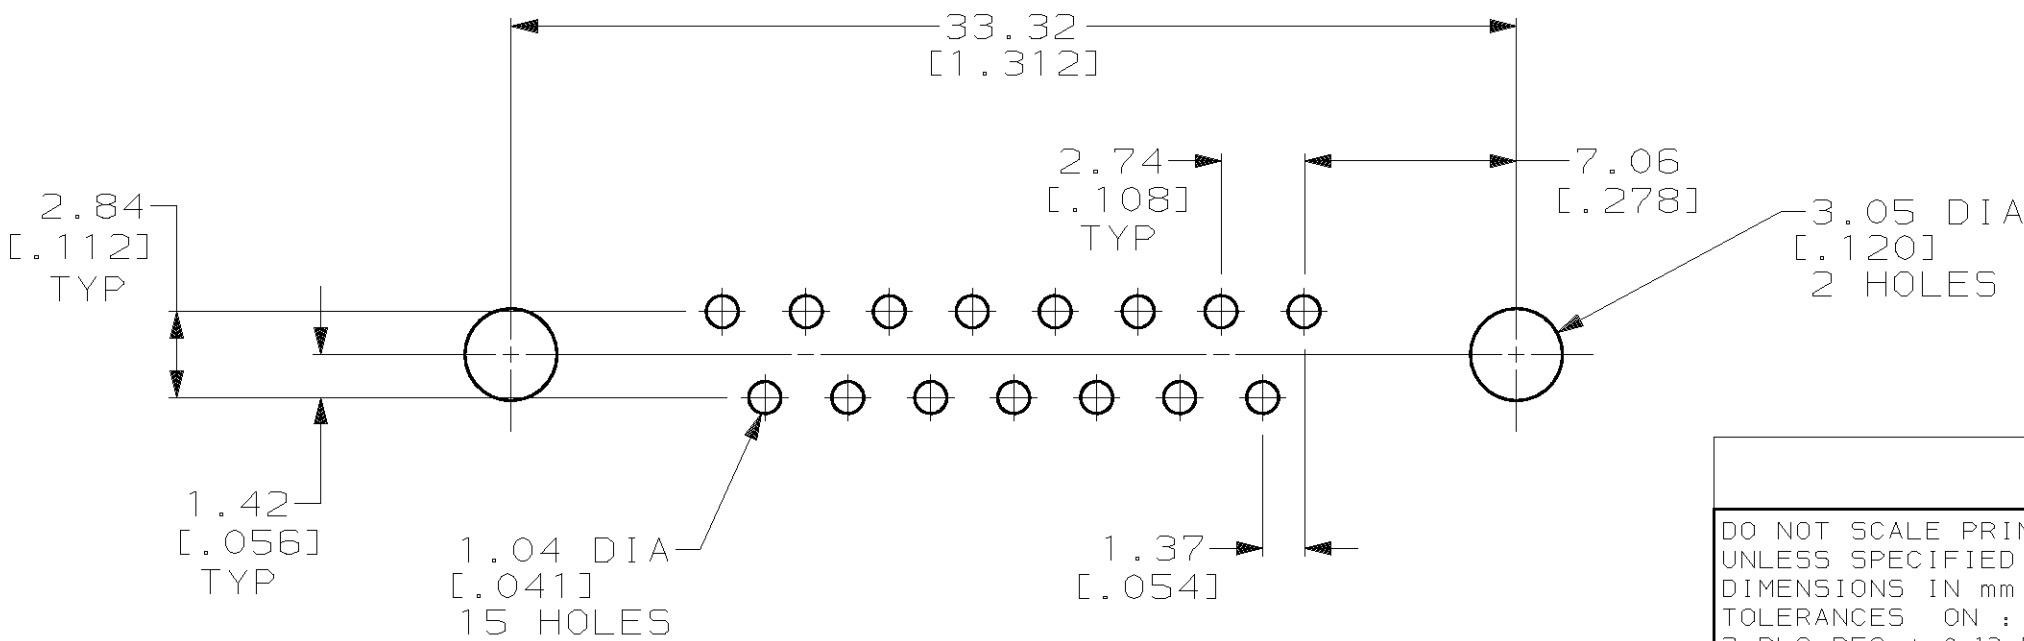
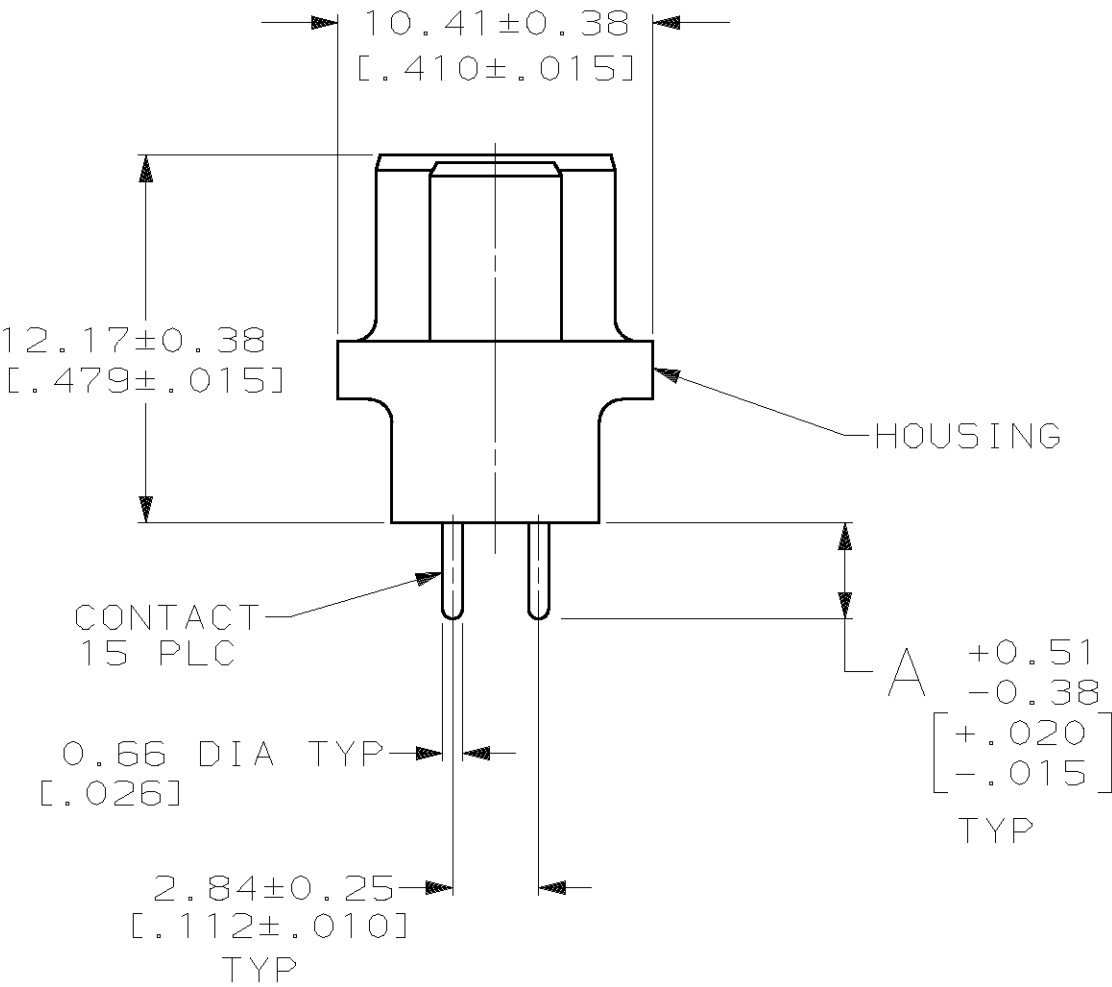
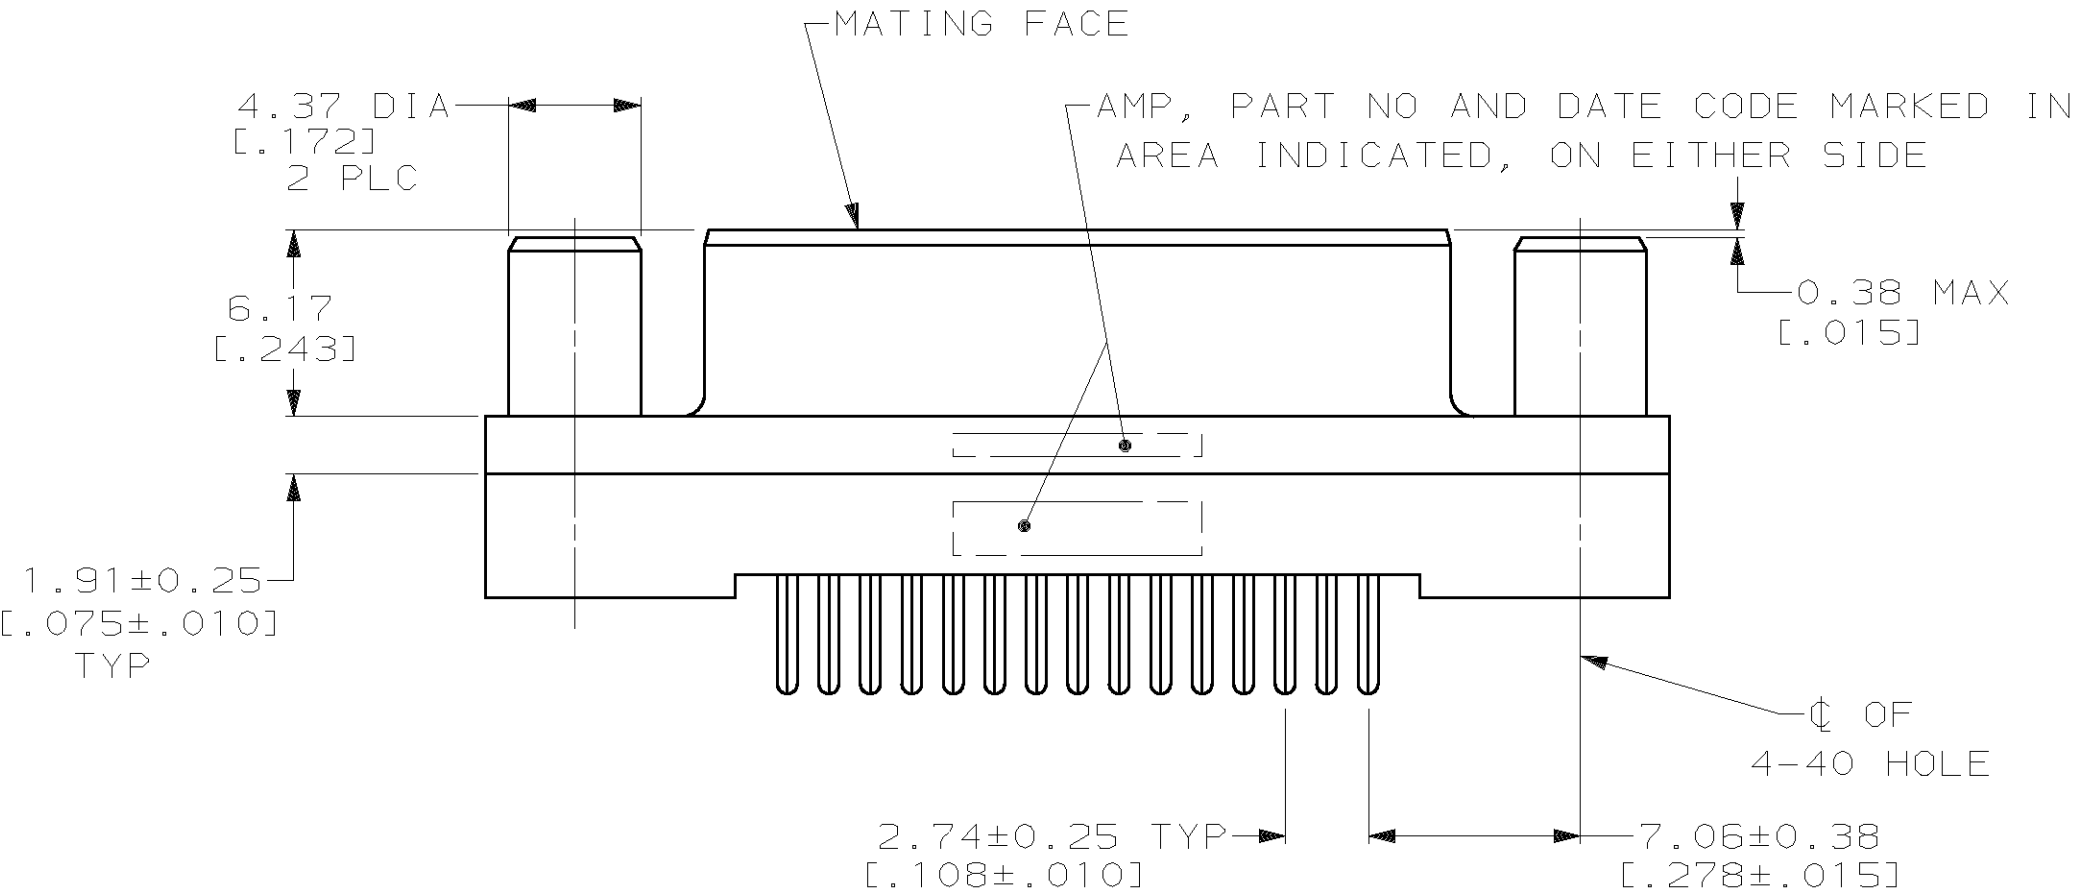


LOC	DIST	P	F	REVISIONS			DATE	APPD
				ZONE	LTR	DESCRIPTION		
GP	00				H	REV PER EC OUE0-0002-01	09 JAN 02	JR

- 1 HOUSING: BLACK POLYESTER, UL 94V-0 RATED; CONTACTS: PHOSPHOR BRONZE PER QQ-B-750; SCREWLOCKS: BRASS PER QQ-B-626.
- 2 GOLD PLATING PER MIL-G-45204, TIN PLATING PER MIL-T-10727, NICKEL PLATING PER QQ-N-290, COPPER PLATING PER MIL-C-14550.
- 3 GOLD FLASH FOR A LENGTH OF 2.54[.100] MIN FROM MATING END, 2.54μm[.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, ALL OVER 1.27μm[.000050] MIN NICKEL.
- 4 0.76μm[.000030] MIN GOLD FOR A LENGTH OF 2.54[.100] MIN FROM MATING END, 2.54μm[.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, ALL OVER 1.27μm[.000050] MIN NICKEL.
- 5 1.27μm[.000050] MIN NICKEL OVER COPPER FLASH.

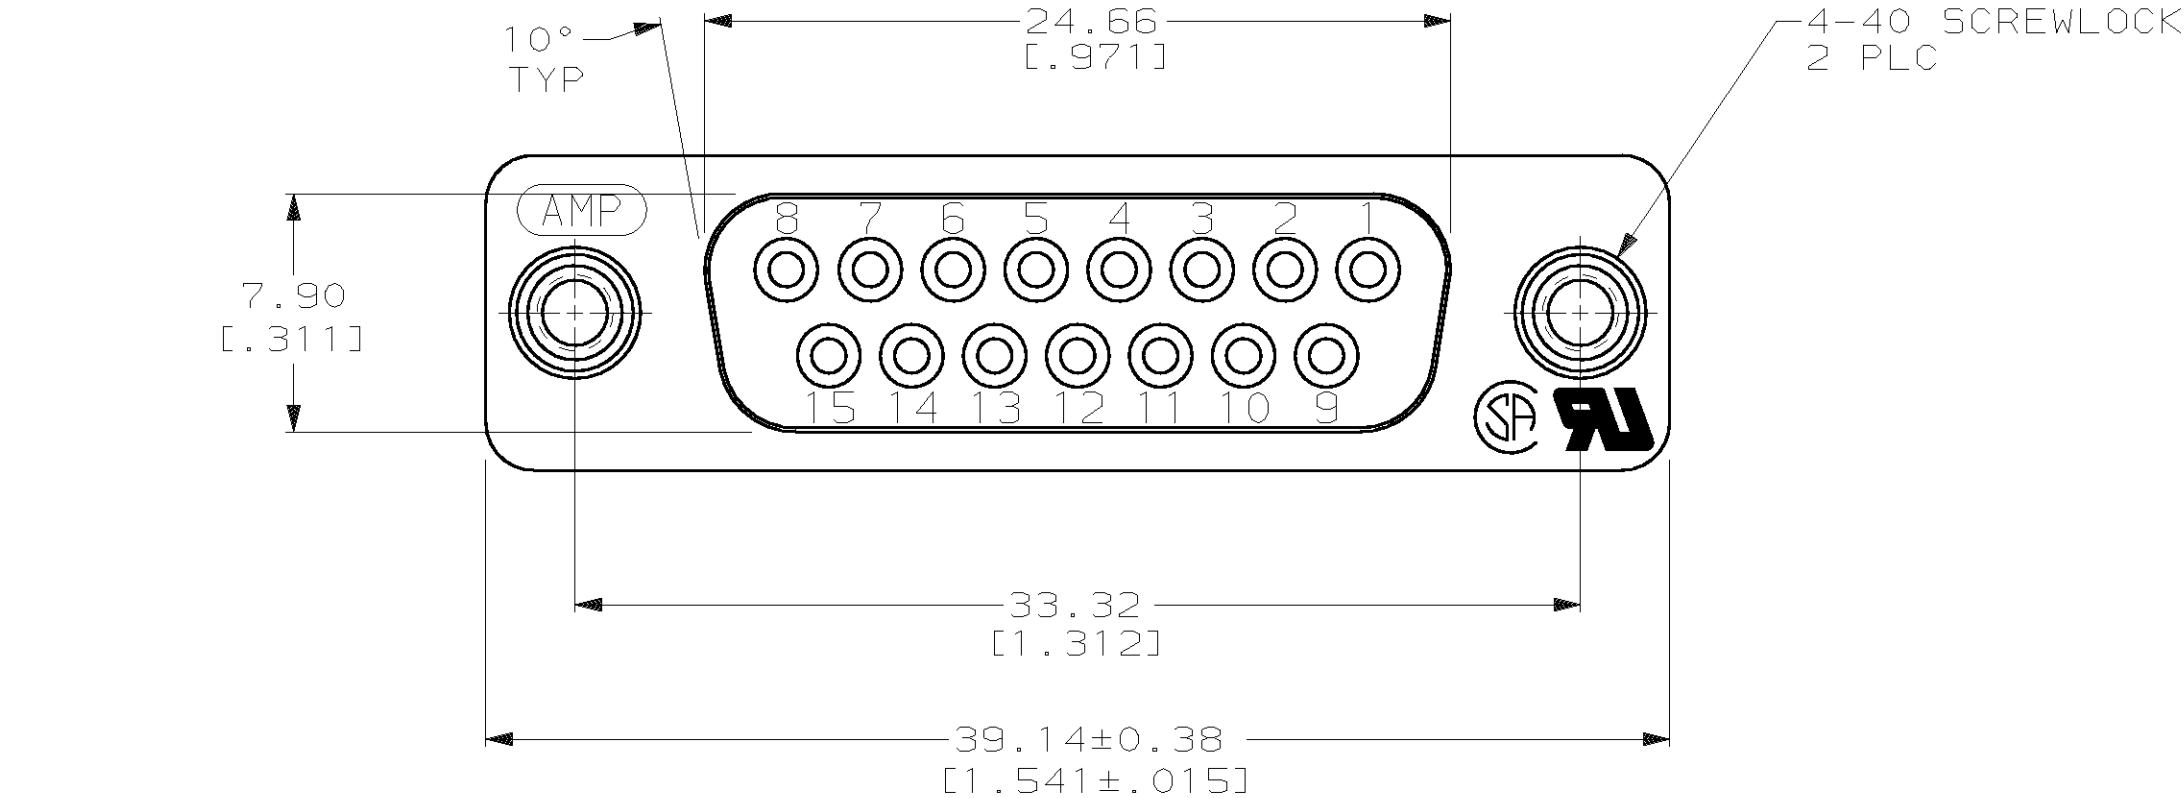

RECOMMENDED PC BOARD
MOUNTING DIMENSIONS

OBSOLETE	6.35 [0.250]	4	745077-8
SUPERSEDED BY 745077-8	6.35 [0.250]	3	745077-7
	4.32 [0.170]	4	745077-6
OBSOLETE	4.32 [0.170]	3	745077-5
	3.18 [0.125]	4	745077-4
	3.18 [0.125]	3	745077-3
OBSOLETE	3.56 [0.140]	4	745077-2

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 0.13 [0.005] 3 PLC DEC ± 0.13 [0.005] ANGLES ± 2°		DR 11-16-89 J McCLINTON	AMP AMP INCORPORATED Harrisburg, Pa. 17105	
MATERIAL		CHK 2-1-90 R.STONE	NAME	
FINISH		APPD 2-2-90 S.SCHIEFERLY	RECEPTACLE ASSEMBLY, SIZE 2, 15 POSN, VERTICAL, AMPLIMITE® HD-20	
CONTACT: SEE TABLE		APPD 2-2-90 C.ROHDE	SIZE	
SCREWLOCK:		PRODUCT SPEC 108-40025	CAGE CODE 00779	
		APPLICATION SPEC	DRAWING NO 745077	
		WEIGHT	SCALE 4:1	
			SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[745077-3](#)