



April 1988  
Revised June 2003

# 74F86

## 2-Input Exclusive-OR Gate

### General Description


This device contains four independent gates, each of which performs the logic exclusive-OR function.

### Ordering Code:


| Order Number | Package Number | Package Description  |
|--------------|----------------|--|
| 74F86SC      | M14A           | 14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow |
| 74F86SJ      | M14D           | 14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide                |
| 74F86PC      | N14A           | 14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide       |

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

### Logic Symbol

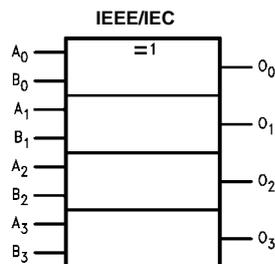

### Connection Diagram

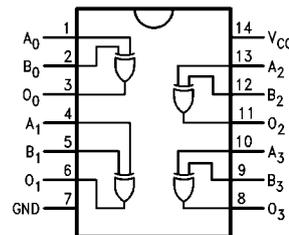

### Unit Loading/Fan Out

| Pin Names  | Description | U.L.     | Input $I_{IH}/I_{IL}$  |
|------------|-------------|----------|------------------------|
|            |             | HIGH/LOW | Output $I_{OH}/I_{OL}$ |
| $A_n, B_n$ | Inputs      | 1.0/1.0  | 20 $\mu$ A/-0.6 mA     |
| $O_n$      | Outputs     | 50/33.3  | -1 mA/20 mA            |

74F86 2-Input Exclusive-OR Gate

74F86

| Absolute Maximum Ratings (Note 1)                                   |                                      | Recommended Operating Conditions |                |
|---|--------------------------------------|----------------------------------|----------------|
| Storage Temperature   | -65°C to +150°C                      | Free Air Ambient Temperature     | 0°C to +70°C   |
| Ambient Temperature under Bias                                      | -55°C to +125°C                      | Supply Voltage                   | +4.5V to +5.5V |
| Junction Temperature under Bias                                     | -55°C to +150°C                      |                                  |                |
| V <sub>CC</sub> Pin Potential to Ground Pin                         | -0.5V to +7.0V                       |                                  |                |
| Input Voltage (Note 2)  | -0.5V to +7.0V                       |                                  |                |
| Input Current (Note 2)  | -30 mA to +5.0 mA                    |                                  |                |
| Voltage Applied to Output in HIGH State (with V <sub>CC</sub> = 0V) |                                      |                                  |                |
| Standard Output   | -0.5V to V <sub>CC</sub>             |                                  |                |
| 3-STATE Output  | -0.5V to +5.5V                       |                                  |                |
| Current Applied to Output in LOW State (Max)                        | twice the rated I <sub>OL</sub> (mA) |                                  |                |

**Note 1:** Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.


**Note 2:** Either voltage limit or current limit is sufficient to protect inputs.

### DC Electrical Characteristics

| Symbol           | Parameter                         | Min                                       | Typ        | Max  | Units | V <sub>CC</sub> | Conditions   |
|------------------|-----------------------------------|---|------------|------|-------|-----------------|--|
| V <sub>IH</sub>  | Input HIGH Voltage                | 2.0                                       |            |      | V     |                 | Recognized as a HIGH Signal                          |
| V <sub>IL</sub>  | Input LOW Voltage                 |   |            | 0.8  | V     |                 | Recognized as a LOW Signal                           |
| V <sub>CD</sub>  | Input Clamp Diode Voltage         |   |            | -1.2 | V     | Min             | I <sub>IN</sub> = -18 mA                             |
| V <sub>OH</sub>  | Output HIGH Voltage               | 10% V <sub>CC</sub><br>5% V <sub>CC</sub> | 2.5<br>2.7 |      | V     | Min             | I <sub>OH</sub> = -1 mA<br>I <sub>OH</sub> = -1 mA   |
| V <sub>OL</sub>  | Output LOW Voltage                | 10% V <sub>CC</sub>                       |            | 0.5  |       | Min             | I <sub>OL</sub> = 20 mA                              |
| I <sub>IH</sub>  | Input HIGH Current                |   |            | 5.0  | μA    | Max             | V <sub>IN</sub> = 2.7V                               |
| I <sub>BVI</sub> | Input HIGH Current Breakdown Test |   |            | 7.0  | μA    | Max             | V <sub>IN</sub> = 7.0V                               |
| I <sub>CEX</sub> | Output HIGH Leakage Current       |   |            | 50   | μA    | Max             | V <sub>OUT</sub> = V <sub>CC</sub>                   |
| V <sub>ID</sub>  | Input Leakage Test                | 4.75                                      |            |      | V     | 0.0             | I <sub>ID</sub> = 1.9 μA<br>All other pins grounded  |
| I <sub>OD</sub>  | Output Leakage Circuit Current    |   |            | 3.75 | μA    | 0.0             | V <sub>IOD</sub> = 150 mV<br>All other pins grounded |
| I <sub>IL</sub>  | Input LOW Current                 |   |            | -0.6 | mA    | Max             | V <sub>IN</sub> = 0.5V                               |
| I <sub>OS</sub>  | Output Short-Circuit Current      | -60                                       |            | -150 | mA    | Max             | V <sub>OUT</sub> = 0V                                |
| I <sub>CCH</sub> | Power Supply Current              |   | 12         | 18   | mA    | Max             | V <sub>O</sub> = HIGH                                |
| I <sub>CCL</sub> | Power Supply Current              |   | 18         | 28   | mA    | Max             | V <sub>O</sub> = LOW                                 |




### AC Electrical Characteristics

| Symbol           | Parameter   | T <sub>A</sub> = +25°C<br>V <sub>CC</sub> = +5.0V<br>C <sub>L</sub> = 50 pF |     |     | T <sub>A</sub> = 0°C to +70°C<br>V <sub>CC</sub> = +5.0V<br>C <sub>L</sub> = 50 pF |     | Units |
|------------------|---|---|-----|-----|--|-----|-------|
|                  |   | Min   | Typ | Max | Min  | Max |       |
| t <sub>PLH</sub> | Propagation Delay   | 3.0   | 4.0 | 5.5 | 3.0  | 6.5 | ns    |
| t <sub>PHL</sub> | A <sub>n</sub> , B <sub>n</sub> to O <sub>n</sub><br>(Other Input LOW)  | 3.0   | 4.2 | 5.5 | 3.0  | 6.5 |       |
| t <sub>PLH</sub> | Propagation Delay   | 3.5   | 5.3 | 7.0 | 3.5  | 8.0 | ns    |
| t <sub>PHL</sub> | A <sub>n</sub> , B <sub>n</sub> to O <sub>n</sub><br>(Other Input HIGH) | 3.0   | 4.7 | 6.5 | 3.0  | 7.5 |       |

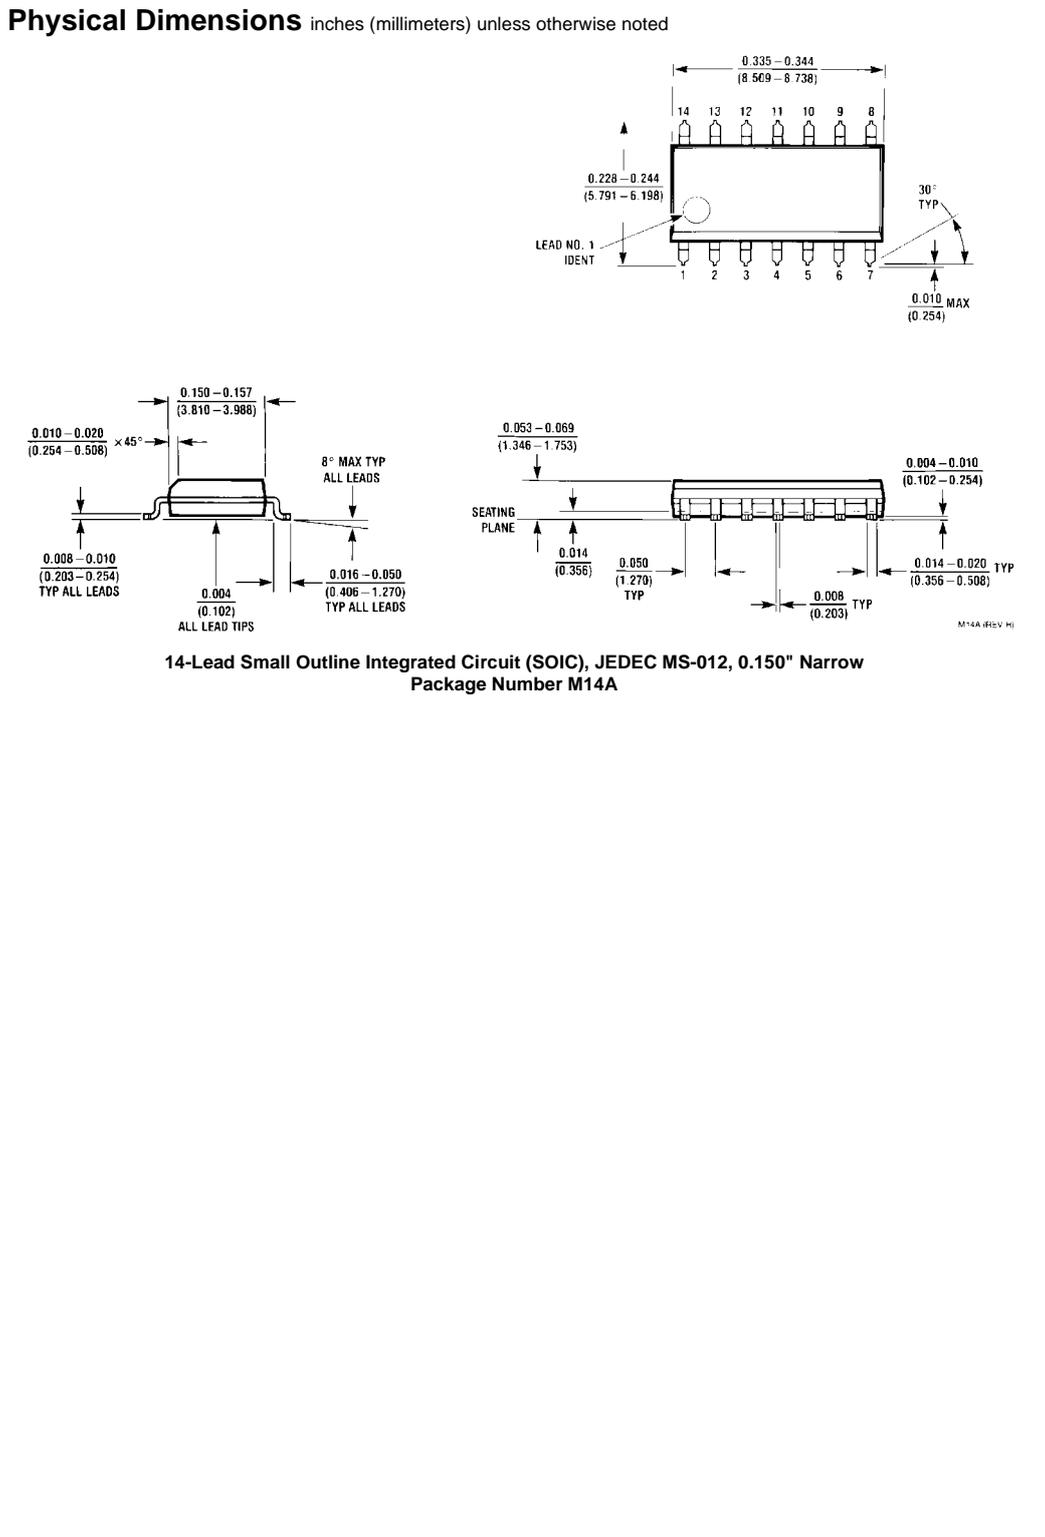

74F86


**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

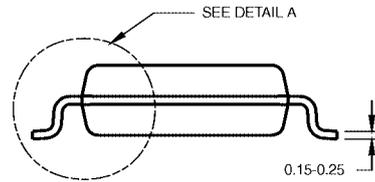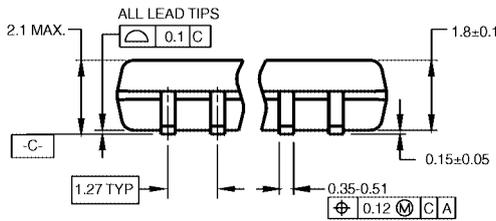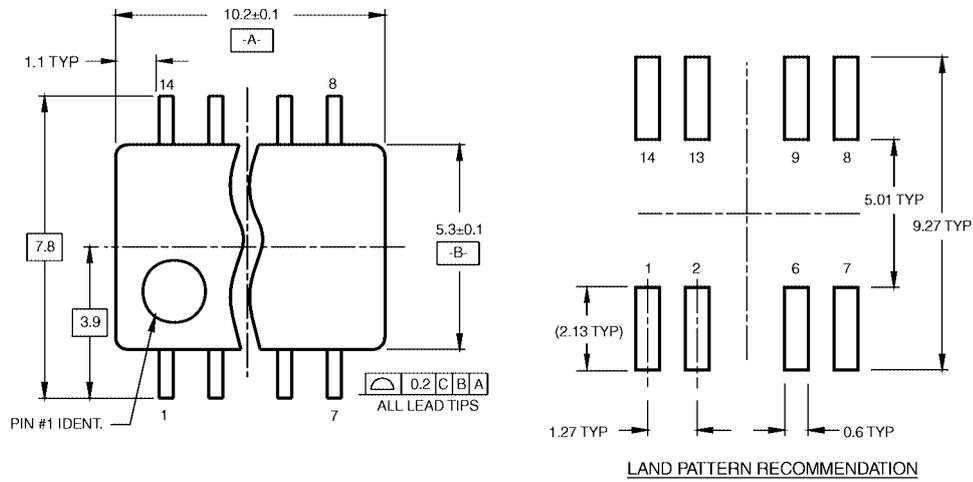

DIMENSIONS ARE IN MILLIMETERS


- NOTES:  
 A. CONFORMS TO EIAJ EDR-7320 REGISTRATION, ESTABLISHED IN DECEMBER, 1998.  
 B. DIMENSIONS ARE IN MILLIMETERS.  
 C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.

M14DRevB1

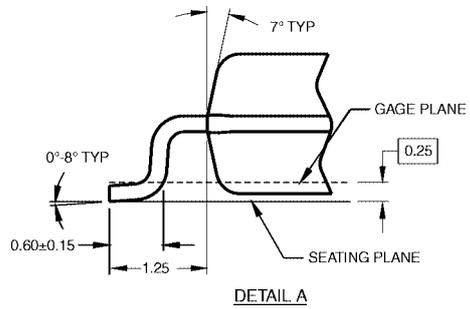

**14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide  
Package Number M14D**

**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

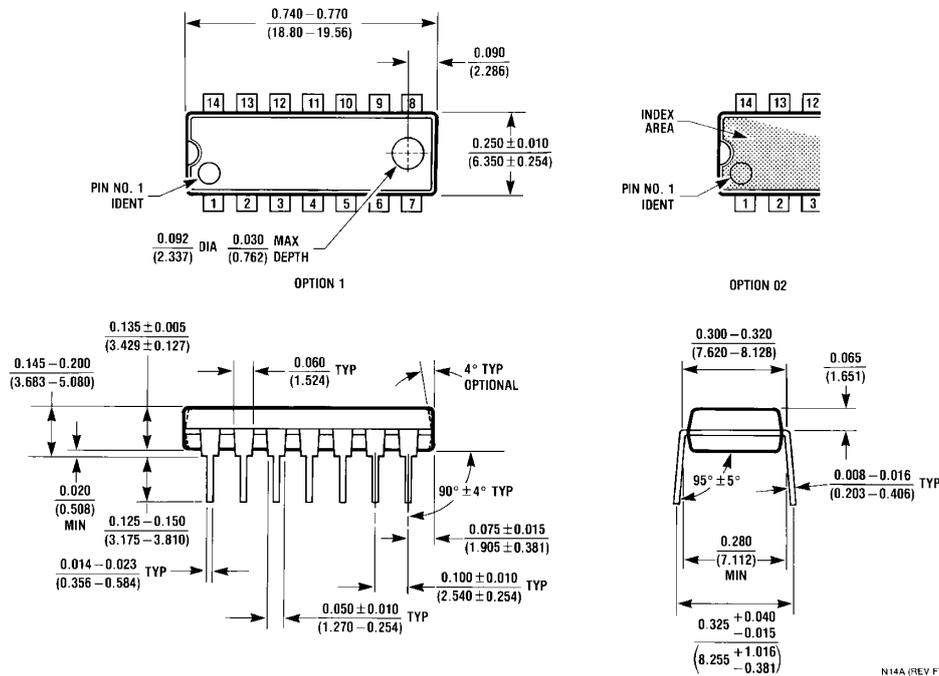

**14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide  
Package Number N14A**

N14A (REV F)

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)