



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

TERM. NO.'s FOR REF. ONLY

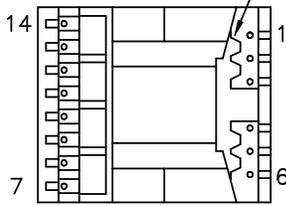



PART MUST INSERT FULLY TO SURFACE A IN RECOMMENDED GRID

.630 MAX. [16.00]

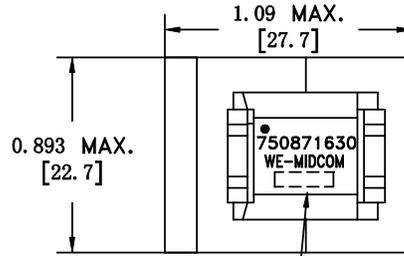

LOT CODE & DATE CODE

.138 ±.020 [3.50 ±.50]

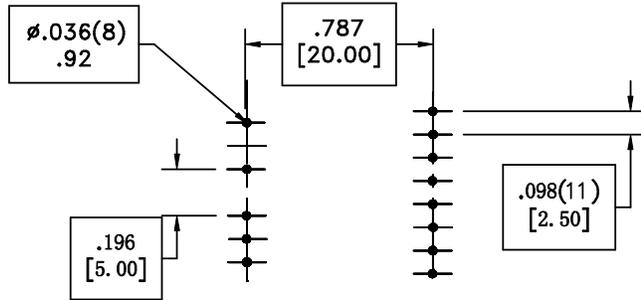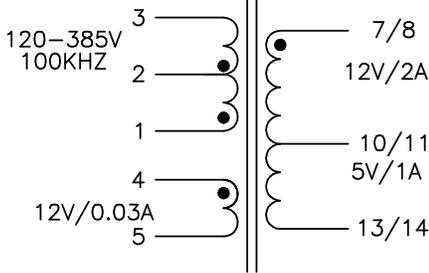

RECOMMENDED P.C. PATTERN, COMPONENT SIDE

**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

D.C. RESISTANCE (@20°C): 1-3, 6.6 ohms max.  
 4-6, 1.0 ohms max.  
 7/8-13/14, 0.7 ohms max.

DIELECTRIC RATING: 4000VAC, 1 minute tested by applying 4800VAC for 1 second at 1-7(tie 3+4,7+8).  
 1500VAC, 1 minute tested by applying 1800VAC for 1 second at 1-6

INDUCTANCE: 500uH ±10%, 10kHz, 100mVAC, 1-3, Ls.

LEAKAGE INDUCTANCE: 10uH max, 10KHz, 100mVAC, 1-3 Lk, Tie others pins

URNS RATIO:  
 (3-1):(4-6) = 7.18:1, ±2%.  
 (3-1):(7/8-13/14) = 7.18:1, ±2%.  
 (3-1):(10/11-13/14) = 15.8:1, ±2%.

Unless otherwise specified: Tolerances: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [ .13 ]	DRAWING TITLE <h1>TRANSFORMER</h1>			DWG.# <b>750871630</b>
	eiSos p/n: <b>750871630</b>	DRAWING NO. <h1>750871630</h1>	REV. 00 9/08	
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	REVISIONS: SEE SHEET 1	SCALE ---	SHEET 2 OF 5	