

TENMA®


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION,
WHETHER IN WHOLE OR IN PART, CAN BE REPRODUCED
WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC
TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1355	A	RELEASED	JWM	12/1/03	HO	12/19/03	JC	1/16/04

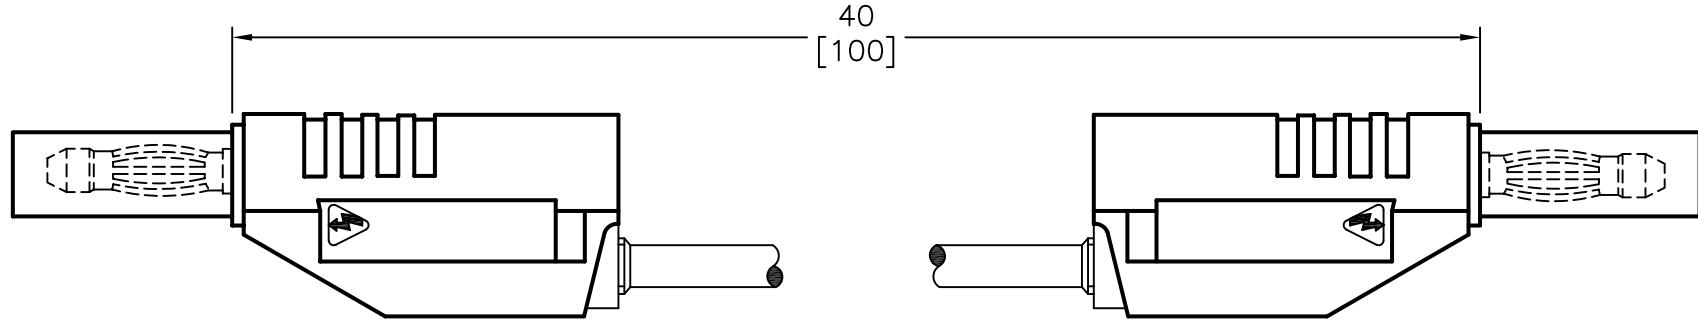

NOTES:

- IEC61010 Ratings: 1000V CAT III
12 Amps
Reinforced or double insulation
- Internal Resistance: 20 milliohms
- Materials: Body-Polyamide (Nylon); Plug-Bronze and Brass, Nickel plated
- Lead Wire Jacket: Extra Flexible Silicone
- Conductor: (0.75MM²)
- Temperature: -20°C to 80°C
- Color: Black



DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT
FOR THE INTENDED USE AND ASSUME ALL RISK AND
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE
SPECIFIED,
DIMENSIONS ARE
FOR REFERENCE
PURPOSES ONLY.

DRAWN BY: Jeff McVicker DATE: 12/1/03
CHECKED BY: Hisham Odish DATE: 12/19/03
APPROVED BY: John Cole DATE: 1/16/04

DRAWING TITLE:
Sheathed Test Leads, 4mm Stacking Plugs
SIZE DWG. NO. 76-027 ELECTRONIC FILE 16F7698.dwg REV A
SCALE: NTS U.O.M.: INCHES [mm] SHEET: 1 OF 1