
MULTI-FUNCTION MODULES



Primary Power Components Division

AC Receptacles Cross Reference

International Connector Specification Listin

RoHS
Compliant

Double Fuseholder Modules IEC320 - C14

Max Rating:

UL 6A/115VAC⁽¹⁾, 10A/250VAC⁽²⁾, 15A/250VAC⁽³⁾
CSA 4A/250VAC⁽⁴⁾, 5A/250VAC⁽⁵⁾, 6A/250VAC⁽⁶⁾, 10A/250VAC⁽⁷⁾
VDE 10A/250VAC⁽⁸⁾



D



E



F

Multi-Function Modules. Both snap-in and screw mount incorporates an IEC male power inlet, fuseholder and optional voltage selector and power switch.


Part Number		Description	Housing Type	Terminals	Fuseholder Type	Power Switch	Voltage Selector	Figure
763-00/001(2)(6)(8)		Screw Mount	Plastic	Solder Tab	*	DPST	Front	D*
764-00/002(2)(7)(8)		Screw Mount	Plastic	Solder Tab	5 x 20	DPST	Front	E
764-00/003(2)(7)(8)		Screw Mount	Plastic	Solder Tab	5 x 20	DPST	Front	F

* Fuseholder for 5x20 mm (EURO) or 6.3 x 32 mm (North American Type).

Qualtek Electronics Corporation


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

MECHANICAL DIMENSIONS:

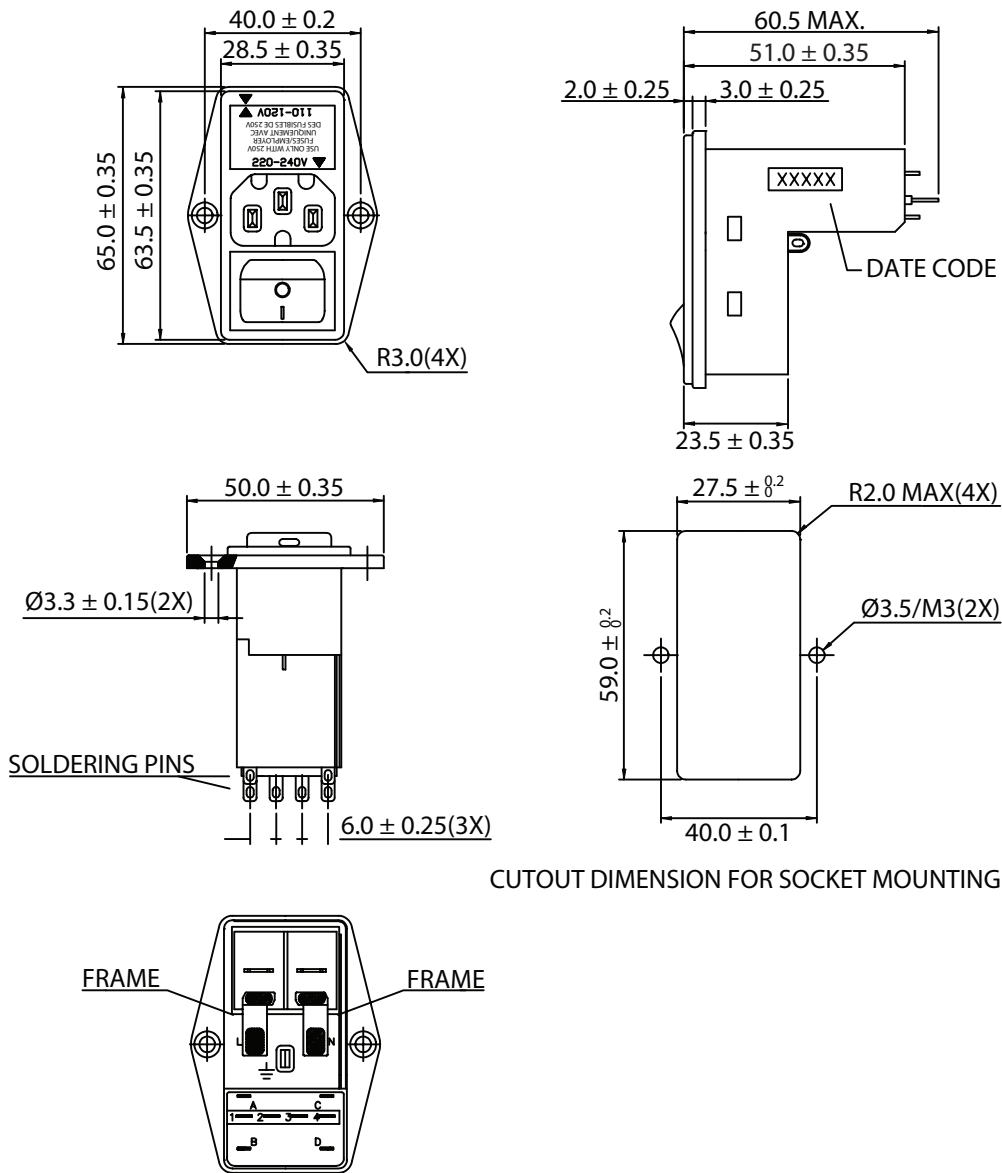

REVISION			
REV.	DESCRIPTION		APPROVED
B	RoHS Compliancy		DP
C	Updated Specifications		DP

ELECTRICAL SCHEMATIC:

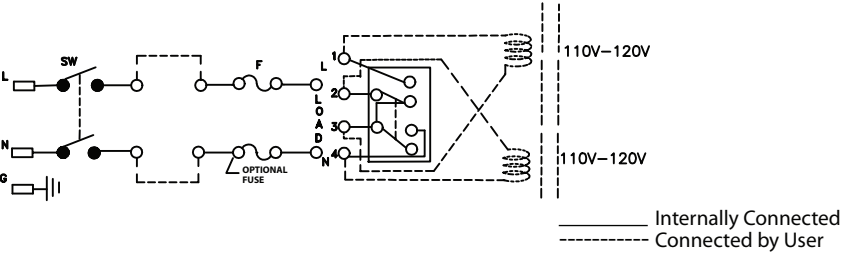

NOTES:

ELECTRICAL CHARACTERISTICS:

RATED CURRENT:

UL/CSA @ 250VAC.....10/6 AMP
SEMKO @250VAC.....10 AMP

DPST POWER SWITCH:

UL / CSA / SEMKO @ 250 VAC.....6 AMP

DOUBLE 5x20mm OR 6.3x32mm FUSEHOLDER

SOLDER TAB TERMINALS

FLAMMABILITY CLASS UL94V-0

PLASTIC CASE

SCREW MOUNT TYPE

= VOLTAGE SELECTOR 110-120 VAC
 220-240 VAC

APPROVALS: UL, CSA, SEMKO

RoHS COMPLIANT

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number: 763-00/001	RoHS Compliant	
0-1	0.15	Description: MULTI-FUNCTION MODULE		
1-6	0.20			
6-18	0.30		UNIT: mm	
18-50	0.50			
50-120	0.70			
120-250	0.90			
250-500	1.20			
		Drawn / Date		
		B.ZHANG		