

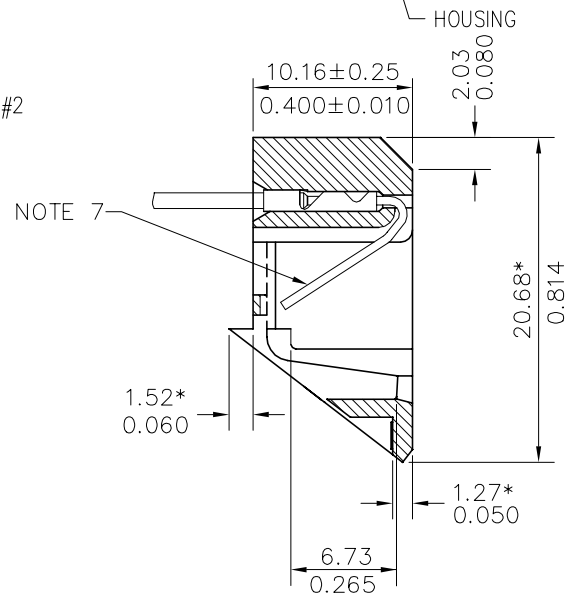
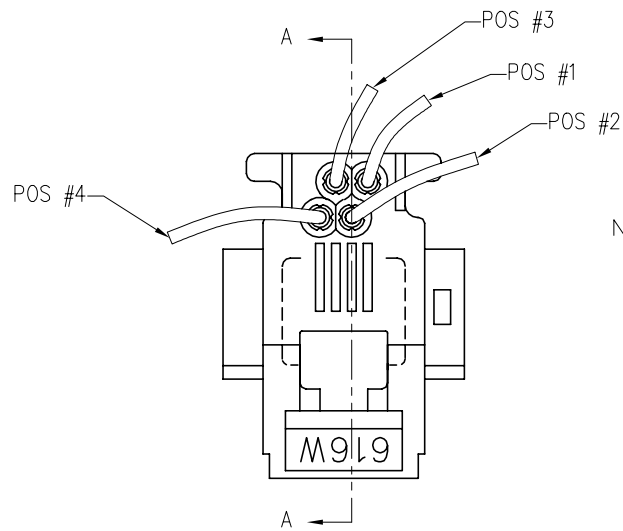
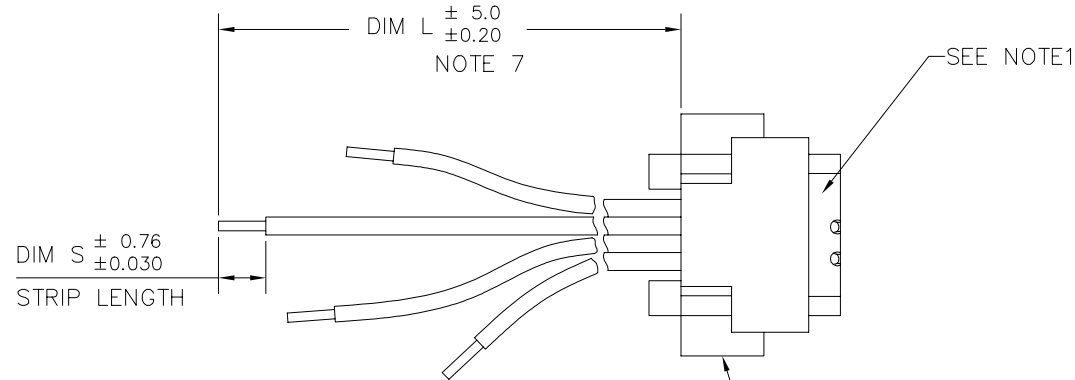


PRODUCT NO.
SEE TABLE OF SHEET 2

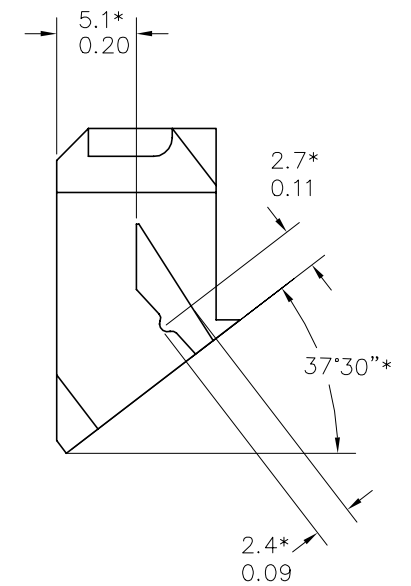

SECTION A-A

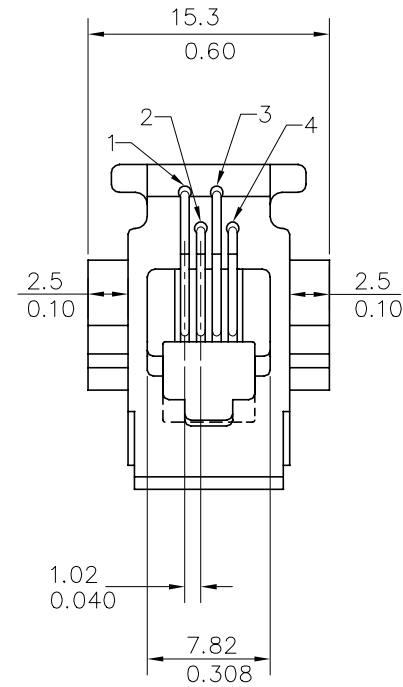

mat'l. code				surface / tolerance		projection	product family		
				ISO1302 ✓ ISO1101 ISO406			MOD JACK		
ltn		ecn nodr		date		tolerances unless otherwise specified		title	
V	T90289		TC	08/04/99		angles linear mm	0.X±0.3		616W MOD JACK ASSY WITH STRIPPED ENDS
W	T90356		TC	08/04/99			0.XX±0.15		
X	N05-0064		YS	03/04/05			0.XXX±0.05		
						scale 2.0			
Y	N08-0097		SH MMD	09/25/08		dr	T.CHIEN	09/07/93	dwg no sheet 1 of 2 76361 type Product Customer Drawing
AA	ELX-N-010669		SH MMD	3/14/12		enr	T.CHIEN	09/07/93	
						chr	J.TSAO	09/08/93	
						appd	J.TSAO	09/08/93	
sheet index		revision		AA	AA				
sheet		sheet		1	2				

PRODUCT NO.	POS. NO.	WIRE COLOR	DIM L	WIRE STYLE	HOUSING MATERIAL	STRIP LENGTH DIM S	SPLICE FINISH	GOLDED WIRE	REMARK
76361-010 76361-010LF	1 2 3 4	RED WHITE GREEN BLACK	78.00/3.071 190.00/7.480 190.00/7.480 78.00/3.071	E	ABS UL94V-0	3.00/0.118	UNPLATED	5u" Au + high performance lubricant ⑩	FOR 76361-010LF STRIPPED END MUST BE SOLDER DIPPED WITH PURE TIN
76361-014 76361-014LF	1 2 3 4	RED WHITE GREEN BLACK	45.00/1.771 180.00/7.087 180.00/7.087 45.00/1.771	B	ABS UL94V-0 GRAY	3.00/0.118	UNPLATED	5u" Au + high performance lubricant ⑩	
76361-015 76361-015LF	1 2 3 4	RED WHITE GREEN BLACK	40.00/1.575 180.00/7.087 180.00/7.087 40.00/1.575	B	ABS UL94V-0 GRAY	3.00/0.118	UNPLATED	5u" Au + high performance lubricant ⑩	
76361-031 76361-031LF	1 2 3 4	RED WHITE GREEN BLACK	64.00/2.520 218.00/8.590 218.00/8.590 64.00/2.520	B	ABS UL94V-0 GRAY	4.00/0.157	UNPLATED	5u" Au + high performance lubricant ⑩	

NOTES:

- MAT'L HOUSING: SEE TABLE.
- MAT'L GOLD WIRE: PHOSPHOR BRONZE ALLOY UNS C51000.

3. INSULATED WIRE:

STYLE A: 27 AWG. 7 STRANDS OF TINNED COPPER WIRE, PVC INSULATION.

STYLE B: 27 AWG. 7 STRANDS OF TINNED COPPER WIRE, TOP COATED WITH TIN PVC INSULATION.

STYLE C: 26 AWG. 7 STRANDS OF TINNED COPPER WIRE, TOP COATED WITH TIN PVC INSULATION.

STYLE D: 26 AWG. 7 STRANDS OF TINNED COPPER WIRE, PVC INSULATION.

STYLE E: FLEXIBLE WIRE. 0.08mm DIA. X 19 CONDUCTOR BARE COPPER WIRE. UNPLATED IN SOLD STRAND. PVC INSULATION.

- FOR FUNCTIONAL MECHANICAL AND VISUAL REQUIREMENTS. SEE PRODUCT SPECIFICATION BUS-12-003
- TERMINAL MAT'L: BRASS ALLOY, PLAIN.
- ALL DIM MARKED WITH ASTERISKS ARE REF. FOR MOUNTING.
- WHEN A 4-POSITION PLUG IS INSERTED INTO THE HSG. THE CONTACT WIRE MAY NOT PROTRUDE OUT OF THE REAR WALL OF HSG.

8. IF LF P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

9. IF LF P/N THE PACKAGING MEETS GS-14-920 SPECIFICATION.

⑩ EQUIVALENT THICKNESS Au AND GXT PLATING HAVE SAME FUNCTION AND THEY ARE ALTERNATIVE BY THE CUSTOEMR .

mat'l. code				surface	tolerance	projection	product family
				ISO1302	ISO1101 ISO406		MOD JACK
l t r e c n n o d r				tolerances unless otherwise specified			
v	T90289	TC	08/04/99	angle S C	0.X±0.3	mm	616W MOD JACK ASSY WITH STRIPPED ENDS
w	T90356	TC	08/04/99		0.XX±0.15		
x	N05-0064	YS	03/04/05		0.XXX±0.05		
y	N08-0097	SH MM	09/25/08	dr	T.CHIEN	09/07/93	dwg no 76361
aa	ELX-N-010668	SH MM	3/14/12	engr	T.CHIEN	09/07/93	
				chr	J.TSAO	09/08/93	
				appd	J.TSAO	09/08/93	type Product Customer Drawing
sheet	revision						
index	sheet						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI:

[76361-015](#) [76361-031](#) [76361-014LF](#) [76361-015LF](#) [76361-014](#)