

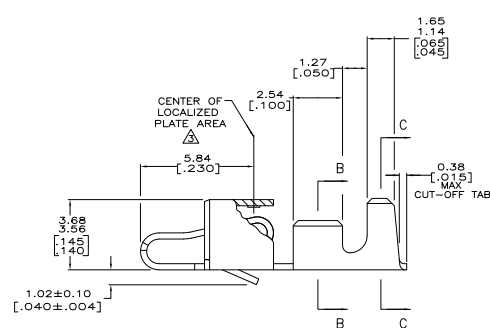


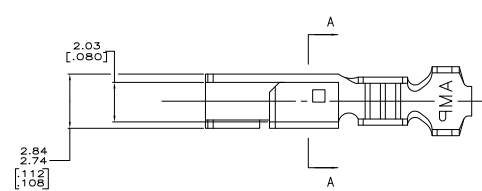


THIS DRAWING IS UNPUBLISHED
 RELEASED FOR VERIFICATION
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
CM	0	REVISED FOR ECO-11-004587	11MMR11	RK	HMR

- INSULATION RANGE: 1.09-2.79 [.043-.110]
 WIRE RANGE: 0.2-0.9 mm (24-18) AWG.
- 0.00203 [.000080] MIN BRIGHT TIN-LEAD OVER
 0.00127 [.000050] MIN NICKEL.
- 0.00076 [.000030] MIN THICK GOLD STRIPES IN
 LOCALIZED PLATE AREA ON BEAM AND DIMPLE OVER
 0.00127 [.000050] MIN THICK NICKEL OVER ENTIRE
 CONTACT.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- 0.00203 [.000080] MIN BRIGHT TIN OVER
 0.00127 [.000050] MIN NICKEL.



△	3-770522-1
△	770522-2
△	770522-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	DATE	DESCRIPTION	BY	CHK	APP
UNLESS OTHERWISE SPECIFIED:		1	0	REVISED FOR ECO-11-004587	11MMR11	RK	HMR
DIMENSIONS (mm INCHES)		TE Connectivity					
RECEPTACLE, SL-156, LOOSE PIECE		A100779					
DRAWING		.318 [.0125] PH BRZ		CUSTOMER DRAWING		SCALE 10:1	