


# #4139- Grey 4 Core Standard Microphone Cable, 50m

## Design

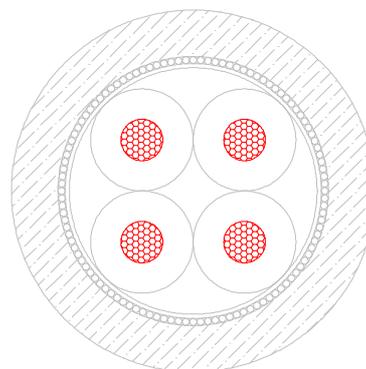

**Part NO: #4139**

**Product Code: RGW-1878**

### Product Description

#### Application:

Multi-conductor-audio,control.& Instrumentation Cables.

#### Multi-construction

#### 4 Cores

##### Construction

#### 4 Cores

#### Tinned Copper

Construction T0.12±0.008×14

Stranded Dia.(mm) 0.52

**Insulation PVC**

Thickness 0.39

Insulation Dia.(+/-0.05mm) 1.3 x 4C Twist

Insulation Color Red, White, Blue & Green

**Cotton Paper ≥115%**

**Spiral Braid Tinned Copper**

Construction T0.15 x 48

**Jacket PVC**

Thickness(mm) 0.85

Dia.(+/-0.15mm) 4.70

Jacket Color Grey

#### Marking

According to customer

#### PACKAGING

50M/Reel

100M/Reel

## Electrical Characteristics

Max.Conductor DC Resistance at 20°C ( Ω /Km) <84.7

Rated Temperature(°C) -20 to +80

Rated Voltage(V) 1000

20°C Insulation Resistance(M Ω .KM) > 200

Capacitance to Screen @ 1 KHz (Pf/m) 120

## RoHS GUIDELINE

We operate according to the following standards

Control Item	Standard	Testing Method	Testing Equipment
Cadmium content (Cd)	<0.01%	EN1122	ICP-AES
Lead content (Pb)	<0.1%	EPA3050B	ICP-AES
Mercury content (Hg)	<0.1%	EPA3052	ICP-AES
Chromium (VI) content	<0.1%	EPA3060(UN-VIS)	ICP-AES
Polybrominated Biphenyls(PBB)	Forbidden	GC/MS	
Polybrominated Diphenyl Ether (PBDE)	Forbidden	GC/MC	

## Revision History

A0-1

**Date: 2013-03-06**

**Page: 1 / 1**