

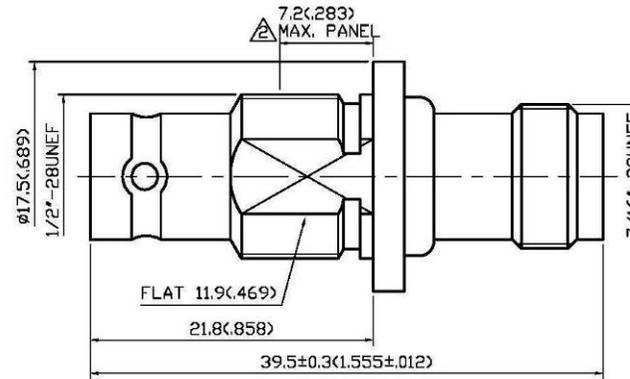



NO	DESCRIPTION	DATE
△	MODIFY 5.2	08.01.12'
△	7.7 → 7.2	09.05.12'
△	DEL. PROOF VOLTAGE WORKING VOLTAGE → VOLTAGE RATING	12.28.12'
△	ADD VSWR	07.08.13'



07/19/2013



MOUNTING HOLE  
SCALE 2:1

**1.0 ELECTRICAL**

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHM
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. △
- 1.4 VSWR: 1.5 MAX. △

**2.0 MATERIALS** △

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

**3.0 FINISHES AND OTHERS**

- 3.1 SEE BELOW TABLE FOR DETAILS.

**4.0 MECHANICAL**

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-346A

**5.0 ENVIRONMENTAL**

- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C
- 5.2 CONNECTOR MUST WITHSTAND WATERPROOF LEAK TEST PRESSURE 7kg/cm<sup>2</sup> MIN. △

9	CENTER CONTACT	BRASS	2	GOLD 30μ <sup>2</sup> MIN.
8	CHASSIS	BRASS	1	NICKEL 100μ <sup>2</sup> MIN.
7	HERMETICALLY SEALED		1	NONE
6	BODY	BRASS	1	NICKEL 100μ <sup>2</sup> MIN.
5	INSULATION	TEFLON	2	NONE
4	WASHER	BRASS	1	NICKEL
3	GASKET	SILICONE	1	RED
2	WASHER	STEEL	1	NICKEL
1	NUT	BRASS	1	NICKEL
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

APPROVED

by

DATE:

DESCRIPTION		HERMETICALLY SEALED STRAIGHT BULKHEAD BNC JACK-TNC JACK ADAPTER							
製圖	DRAWN	TOLERANCE	品名	13-29-11	T.G.N	日期	DATE	版次	REV.
檢圖	CHECK	X ±0.2	TITLE	\ROHS COMPLIANT (50Ω)		05.14.12'			A-4
認定	APPROVAL	XXX ±0.05	單位	mm(in)	DWG.NO.	13-0620			
	Angela	ANGLE ±5°	比例	3:1	7933607				



