

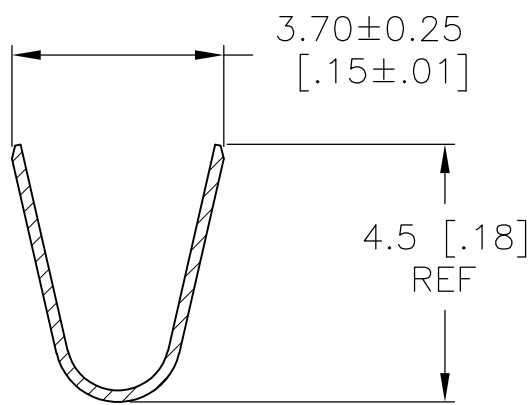
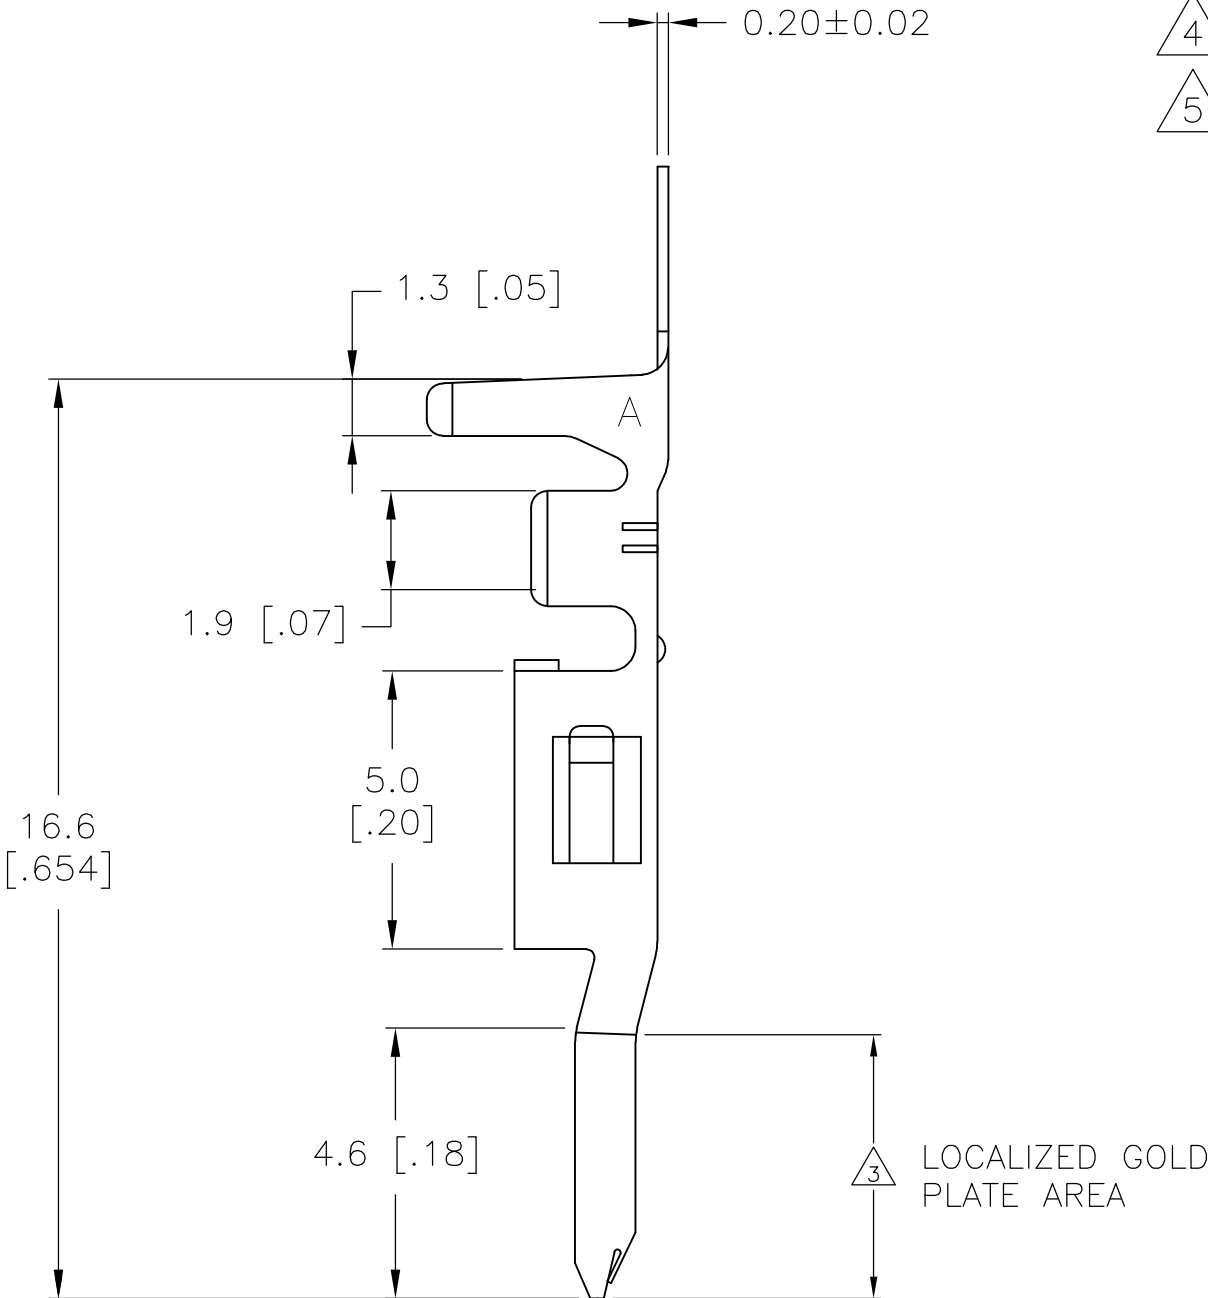


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		H4	REVISED PER ECR-16-000306	12JAN2016	NK	DC


- 1 WIRE RANGE: 0.3–0.82mm² (22–18 AWG)
- 2 INSULATION RANGE: 1.50 – 3.10 DIA.
- 3 FINISH: 0.76μm MINIMUM GOLD IN LOCALIZED GOLD PLATE AREA OVER 1.27μm MINIMUM NICKEL.
- 4 FINISH: 2.54μm MINIMUM PRE-TIN IN LOCALIZED TIN PLATE AREA.
- 5 FINISH: 2.54μm MINIMUM PRE-TIN ALL OVER.

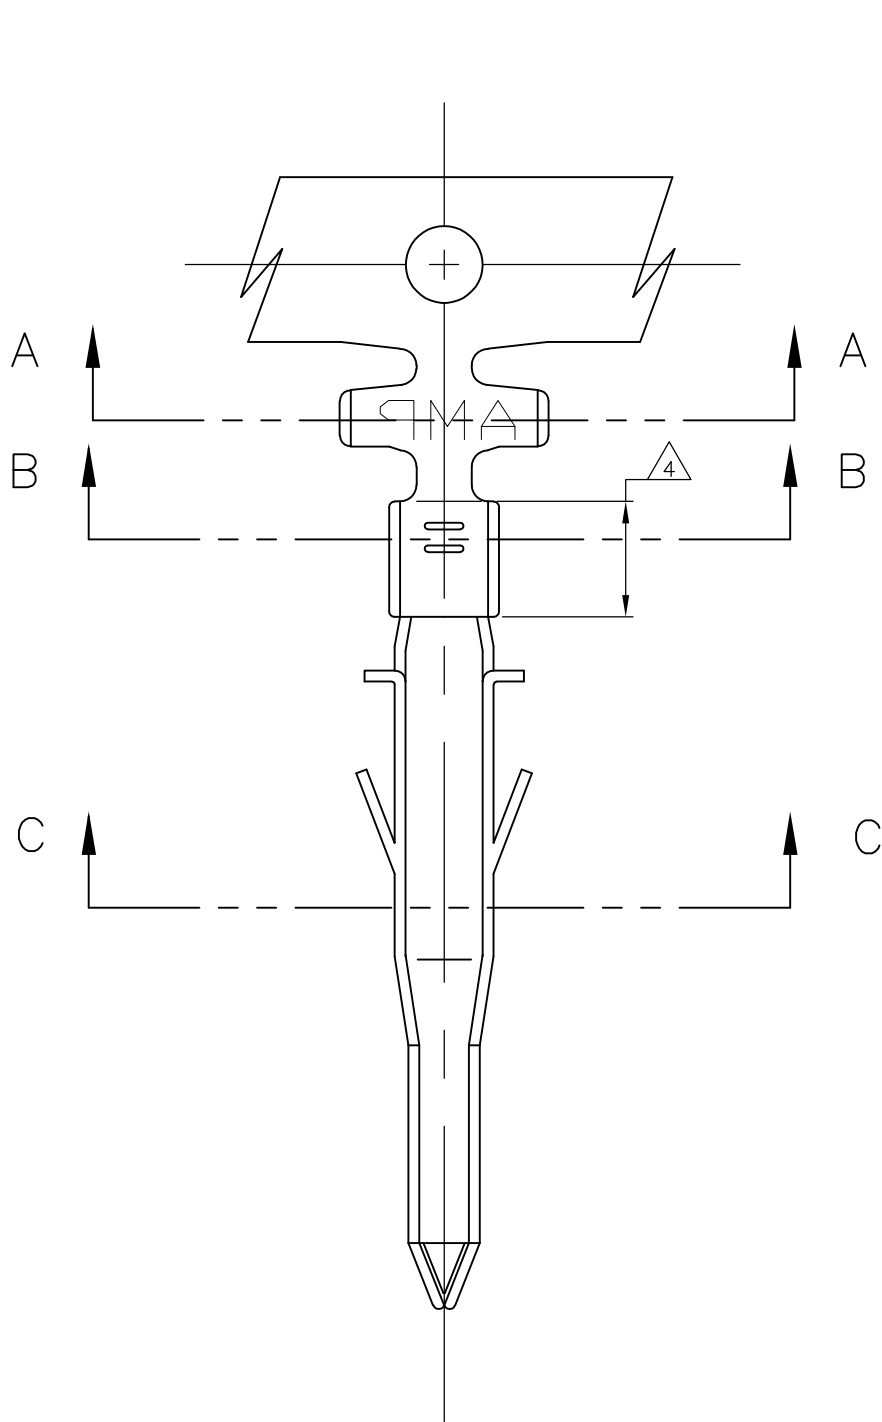

SECTION A–A

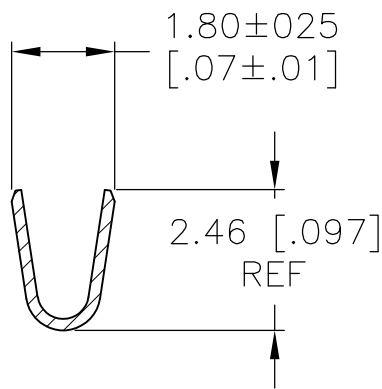


SECTION B–B

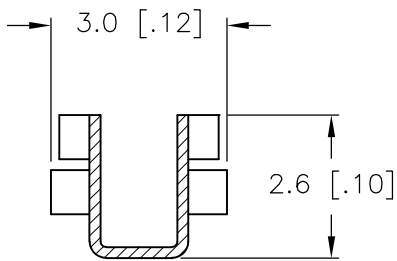

SECTION C–C

GOLD 3 4	PHOS. BRZ.	794955–4
PRE-TIN 5	PHOS. BRZ.	794955–3
GOLD 3 4	BRASS	794955–2
PRE-TIN 5	BRASS	794955–1
FINISH	MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HAMM 07-SEP-2001		 TE Connectivity			
		CHK D. COLEY 07-SEP-2001					
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. COLEY 07-SEP-2001		NAME	
		0 PLC ±		PRODUCT SPEC		TERMINAL PIN VAL-U-LOK(TM)	
		1 PLC ± 0.25 [.010]		108-2112			
		2 PLC ± 0.15 [.006]		APPLICATION SPEC			
		3 PLC ± -		114-13172		SIZE	
		4 PLC ±		WEIGHT		CAGE CODE	
MATERIAL		FINISH				DRAWING NO	
						RESTRICTED TO	
				CUSTOMER DRAWING		SCALE	
						10:1	
						SHEET	
						1 of 1	
						REV	
						H4	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[794955-3 \(Cut Strip\)](#) [794955-3 \(Mouser Reel\)](#) [794955-2 \(Cut Strip\)](#) [794955-2 \(Mouser Reel\)](#)