
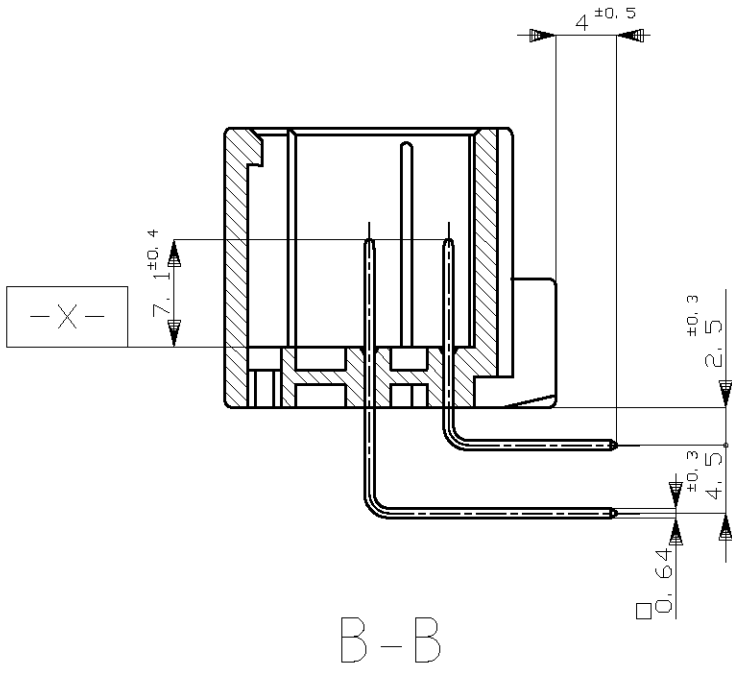
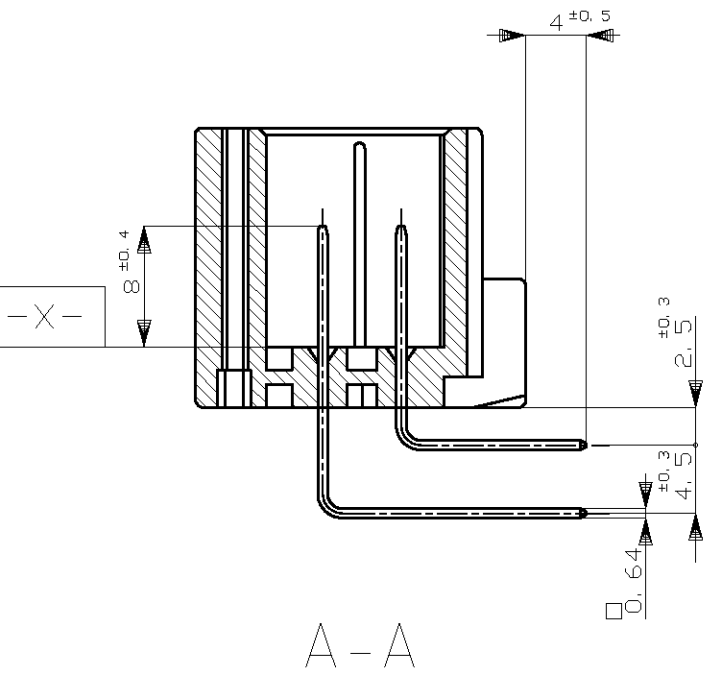
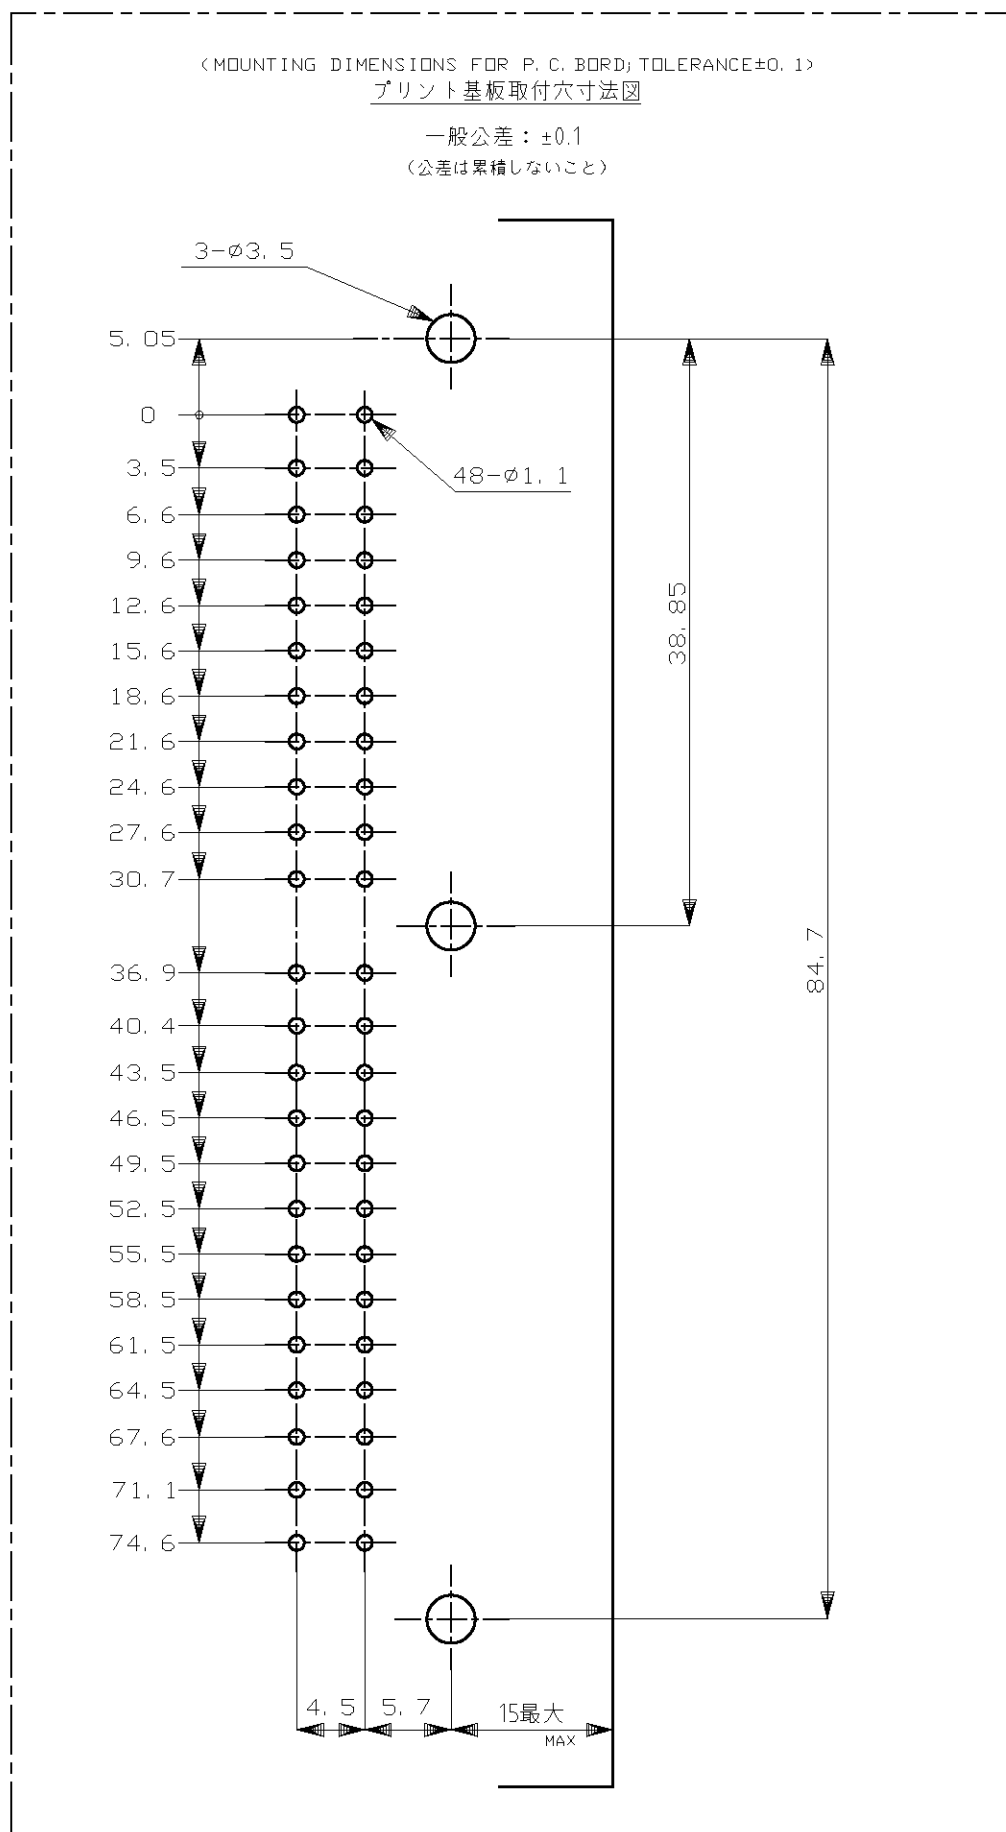
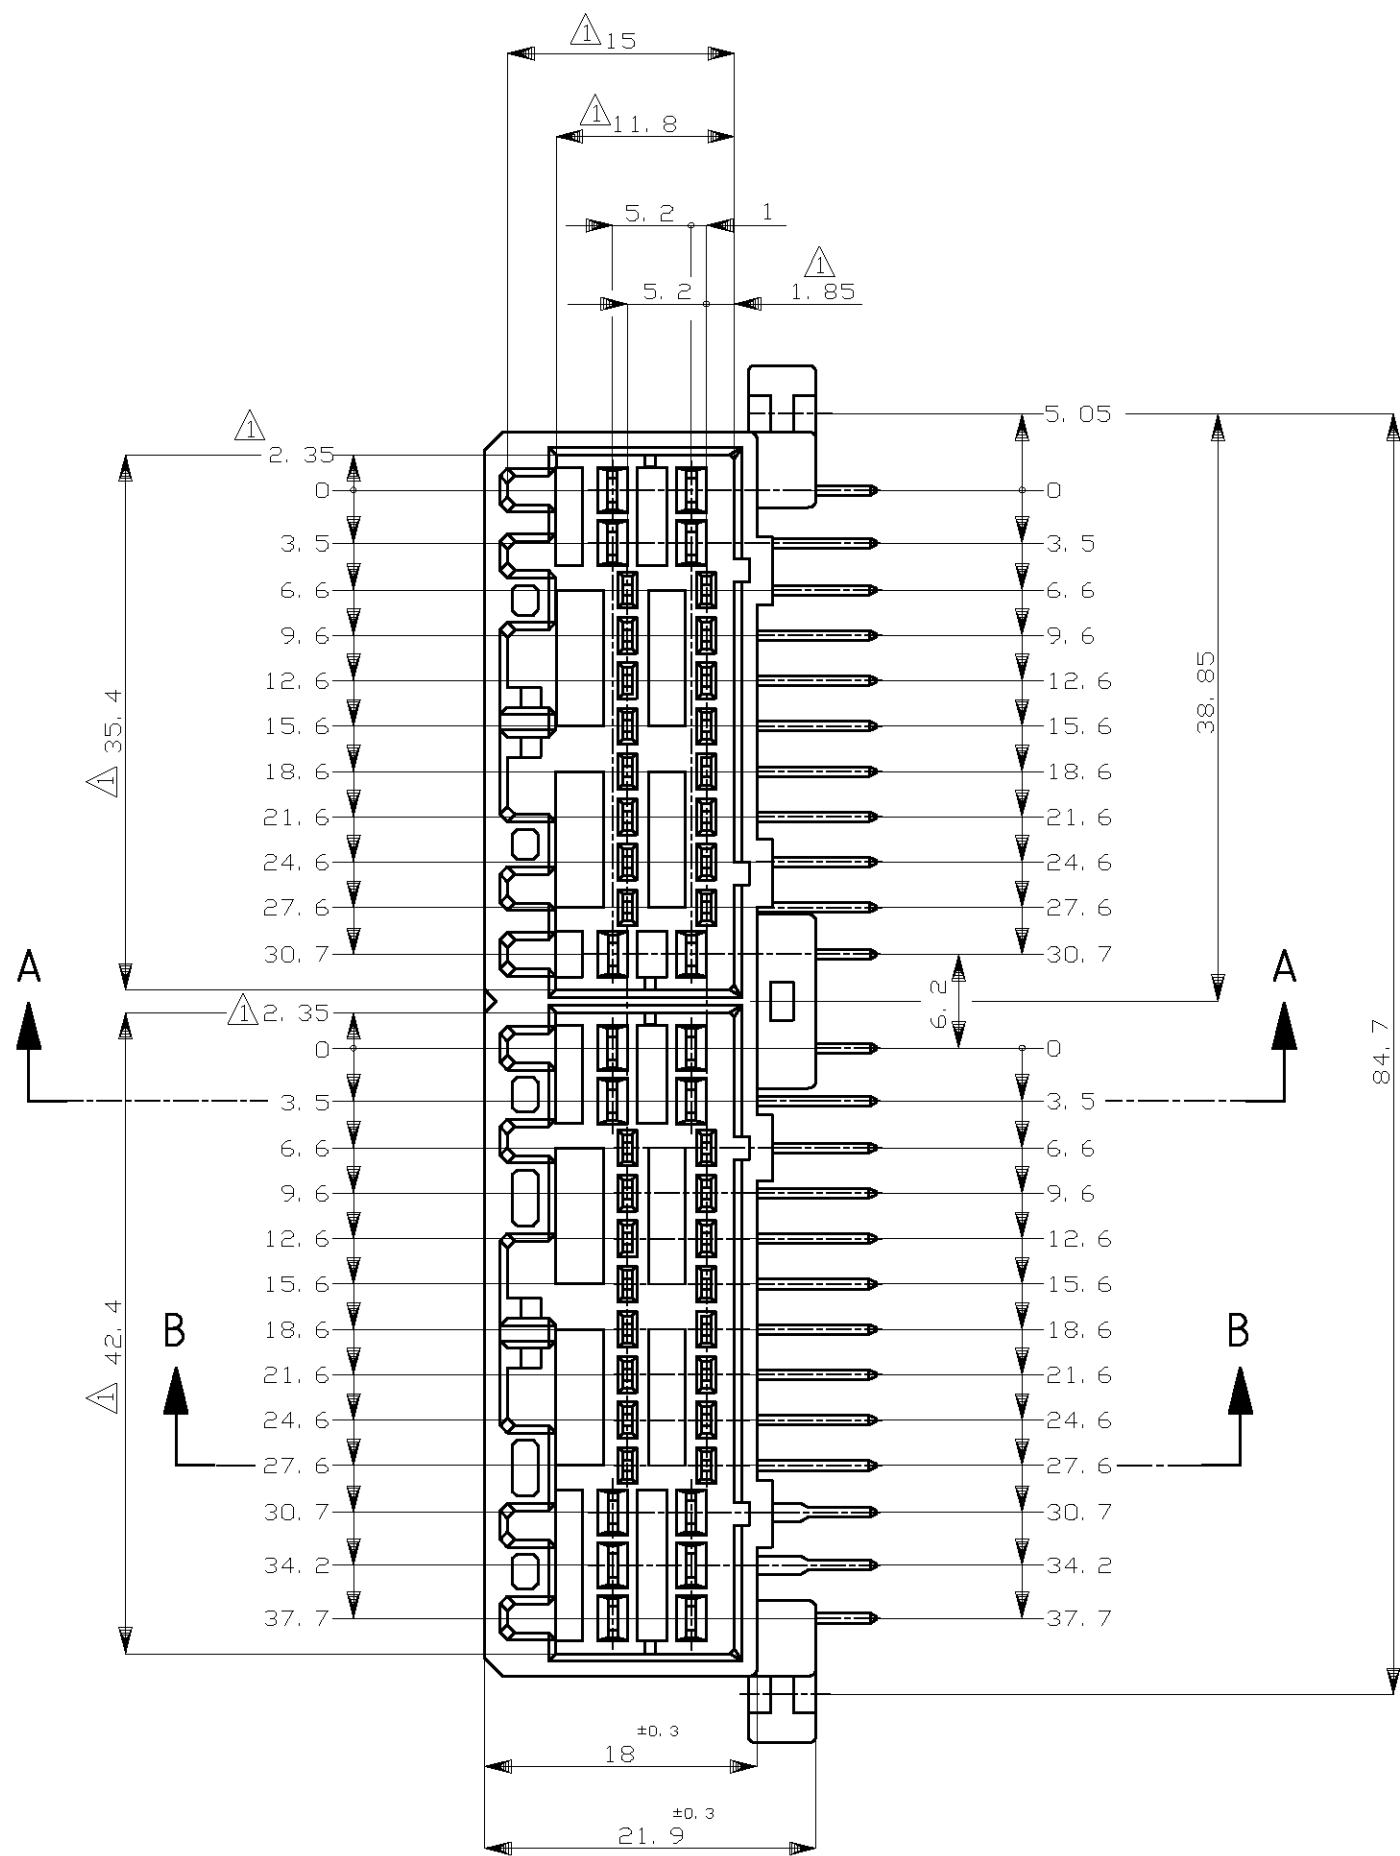


D


C

B

A

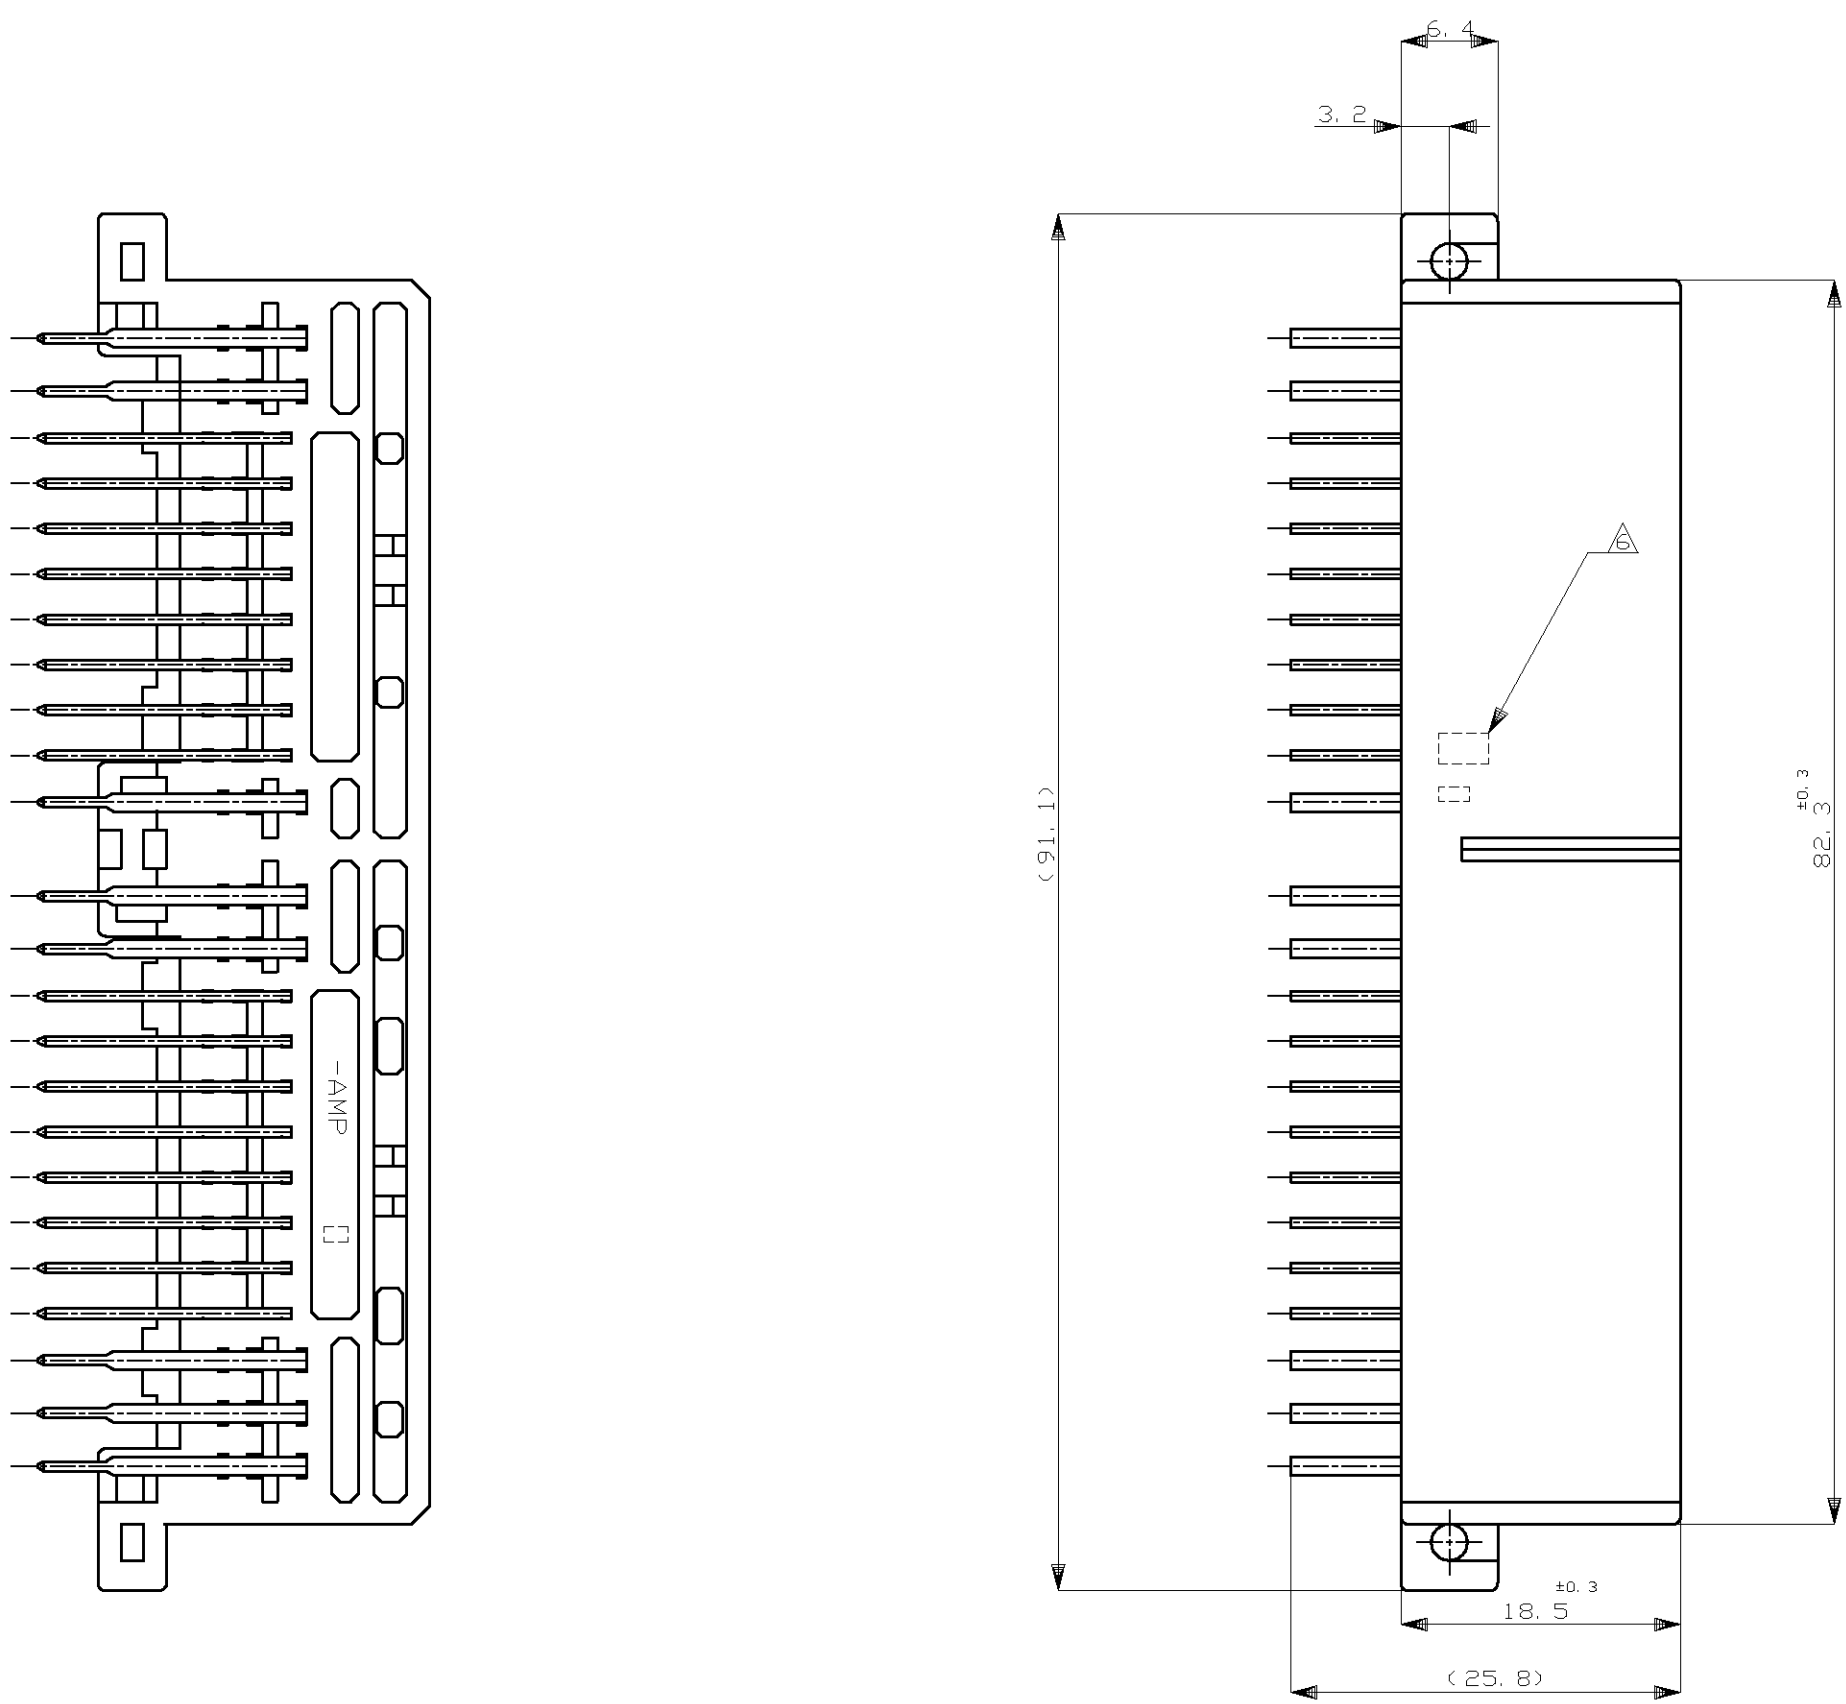

- △[-X-] 面から2mmの範囲で測定
2. 嵌合相手ハウジング型 174515, 174516, 917989, 917992
3. 推奨取付ねじ: JIS B1115, B1112 タップピンねじ, なべ2種
呼び径3, 長さ6mm以下 (締付けトルク: 39N・cm (4kgf・cm) 以下)
4. 適用製品規格番号: 108-5280, 108-5342
- △回路番号:
- パワー回路 ①～⑩
シグナル回路 ⑪～④⑤

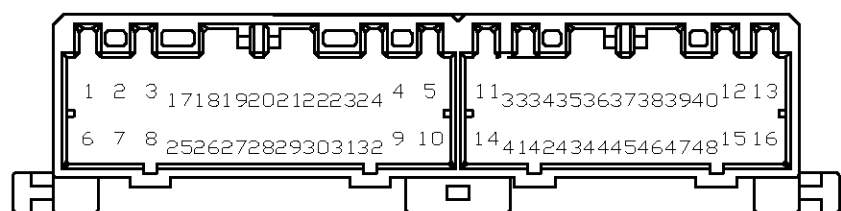

△5 コンタクト仕上識別マーク

- △1 MUST BE KEPT BETWEEN [-X-] AND 2
2. THE MATING PLUG HSG PART NUMBER, 174515, 174516, 917989, 917992
3. RECOMMENDED MOUNTING SCREW, 3mm DIA, 6mm LENGTH (MAX.)
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122
(TIGHTENING TORQUE, 39.2N・cm (4kgf・cm) MAX.)
4. APPLICABLE PRODUCT SPEC NO.: 108-5280, 108-5342
- △5 CIRCUIT NUMBER
- POWER CIRCUIT NO. ①～⑩
SIGNAL CIRCUIT NO. ⑪～④⑤

△5 MARKING FOR DISCERNMENT OF THE CONTACT FINISH

59	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 8	-	19, 20, 27~31, 36	GRAY	9-5174917-6
55	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT) × 40	-	33~40	YELLOW	5-5174917-7
52	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT) × 40	-	18~24, 27~32, 36, 44	YELLOW	2-5174917-7
9	TIN-LEAD	SELECTIVE GOLD × 15	-	18~24, 27~32, 36, 44	GRAY	9-174917-6
8	TIN-LEAD	SELECTIVE GOLD × 10	-	19, 20, 27~31, 36	GRAY	8-174917-6
7	TIN-LEAD	SELECTIVE GOLD × 5	-	19, 20, 27, 28, 36	GRAY	7-174917-6
6	TIN-LEAD	SELECTIVE GOLD × 7	-	21~23, 28~31	YELLOW	6-174917-7
5	TIN-LEAD	SELECTIVE GOLD × 8	-	33~40	YELLOW	5-174917-7
4	TIN-LEAD	SELECTIVE GOLD × 16	-	33~40, 41~48	YELLOW	4-174917-7
3	TIN-LEAD	SELECTIVE GOLD × 16	-	17~24, 33~40	WHITE	3-174917-1
2	TIN-LEAD	SELECTIVE GOLD × 15	-	18~24, 27~32, 36, 44	YELLOW	2-174917-7
0	PRE-TIN × 48	-	-	-	ORANGE	174917-8
0	PRE-TIN × 48	-	-	-	YELLOW	174917-7
0	PRE-TIN × 48	-	-	-	GRAY	174917-6
0	PRE-TIN × 48	-	-	-	BLUE	174917-5
0	PRE-TIN × 48	-	-	-	WHITE	174917-1
△ MARKING	SOLDERING SIDE 半田付け部	CONTACT SIDE 接触部	POWER CIRCUIT NO. パワー回路	SIGNAL CIRCUIT NO. シグナル回路	COLOR 色	PART NUMBER 部品番号
△ MARKING	CONTACT FINISH コンタクト仕上	GOLD PLATED CIRCUIT NO. 金めっき回路番号				

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 寸

TOLERANCES UNLESS
OTHERWISE SPECIFIED

0. PLC ±
1. PLC ±
2. PLC ±
3. PLC ±
4. PLC ±

GENERAL TOLERANCE

0<≤ 10 ±0.2
10<≤ 30 ±0.25
30<≤ 100 ±0.3
ANGLES ±3°

MATERIAL
材料

HOUSING: PBT
CONTACT: BRASS

FINISH
仕上

—

DWN
T. SHINOHARA

CHK
K. BETSUI

APVD
K. BETSUI

PRODUCT SPEC
製品仕様

APPLICATION SPEC
取付適用規格

WEIGHT
—

CUSTOMER DRAWING

SIZE
A1

DATE CODE
00779

DRAWING NO.
174917

RESTRICTED TO
—

SCALE
2:1

SHEET
1 OF 1

REV
M4

TE Connectivity

48POSITION CAP HOUSING ASSEMBLY
040/070 SERIES HYBRID I/O CONNECTOR

00779

174917

2:1

1 OF 1

REV M4