

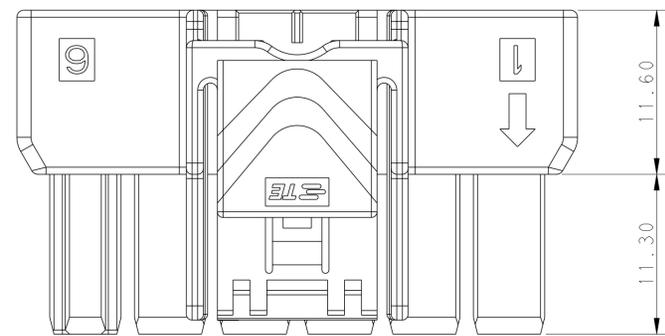
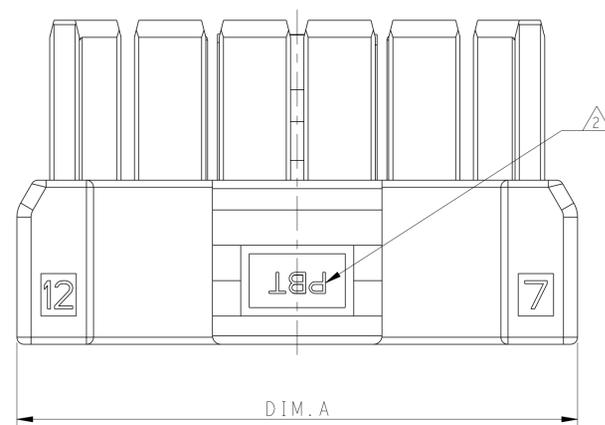
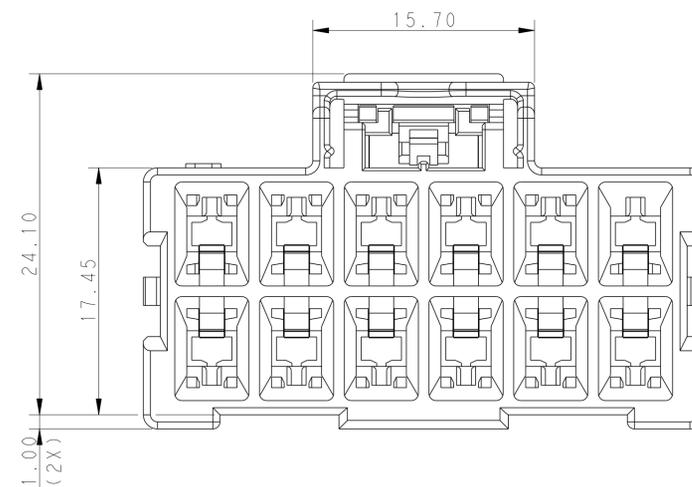


REVISIONS						
LOC	DIST	REV	DESCRIPTION	DATE	OWN	APVD
-	-	D	REVISED PER ECO-16-009784	30JUN16	RS	GJ

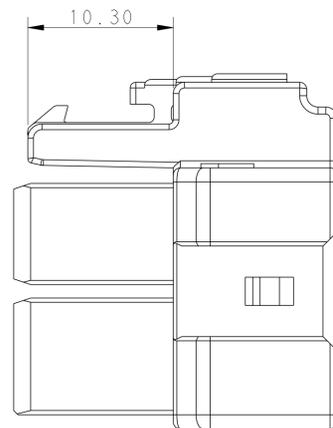

POS.	DIM. A
2*6	39.70
2*5	33.70
2*4	27.70
2*3	21.70

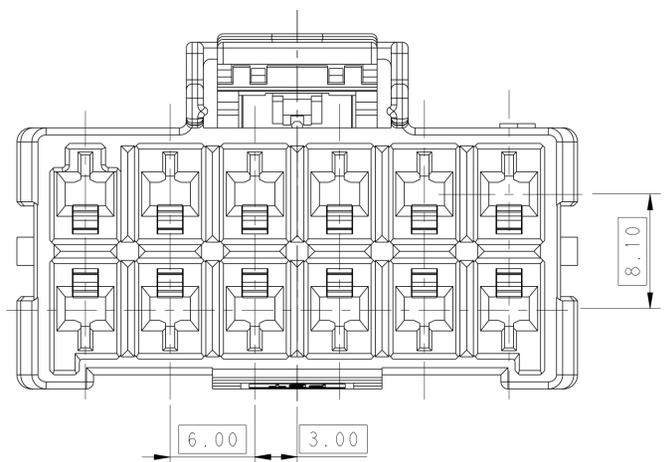



- 1 MATERIAL:
LEVEL 1:PBT, STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW

LEVEL 2:NYLON, HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL
- 2 MATERIAL MARK:
LEVEL 1:PBT, LEVEL 2:HDT
- 3 APPLICABLE CONTACT P/N
RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*, 2238066-*
- 4 MATING CONN, P/N
CAP HSG: *-1971774/5-
TPA (LOCKING PLATE): *-1971778-*



5 This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN TOMMY WU 09JUL2012	TE Connectivity
DIMENSIONS: mm		CHK HAPYE WU 09JUL2012	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD YIHONG MAO 09JUL2012	NAME PLUG HOUSING, DOUBLE ROW POWER TRIPLE LOCK
0 PLC ±	1 PLC ±0.35	PRODUCT SPEC 108-106118	SIZE CAGE CODE DRAWING NO
2 PLC ±0.25	3 PLC ±	APPLICATION SPEC 114-106118	RESTRICTED TO
4 PLC ±	ANGLES ±	WEIGHT	A1 00779C=1971776
MATERIAL	FINISH	Customer Drawing	SCALE 4:1 SHEET 1 OF 2 REV D



LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION	DATE	OWN	APVD		
-	-	SEE SHEET 1	-	-	-		

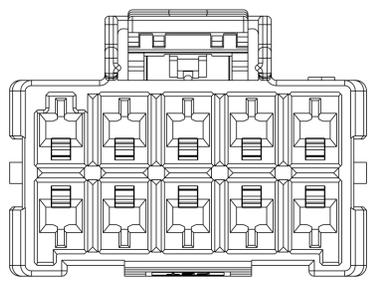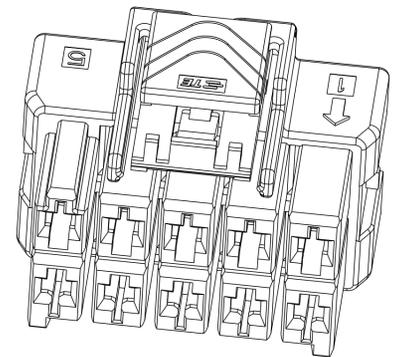


2*5 POSITIONS

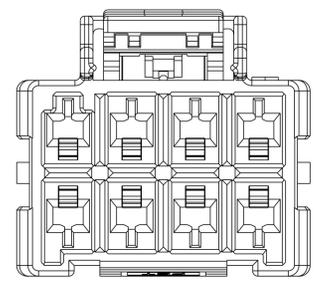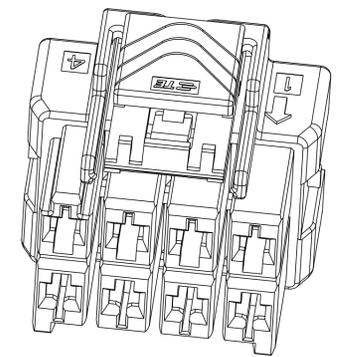


2*4 POSITIONS

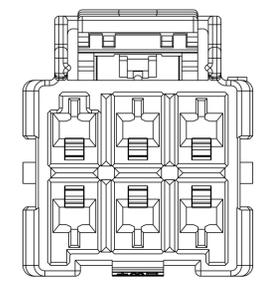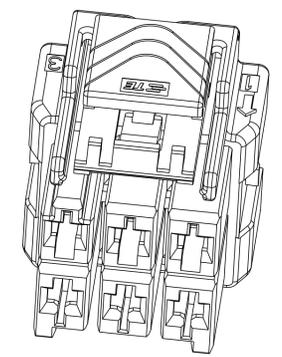


2*3 POSITIONS

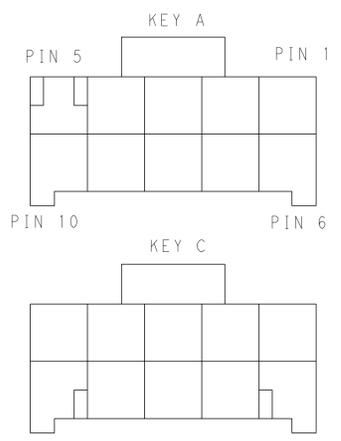

KEYING FOR 2*5 POS.

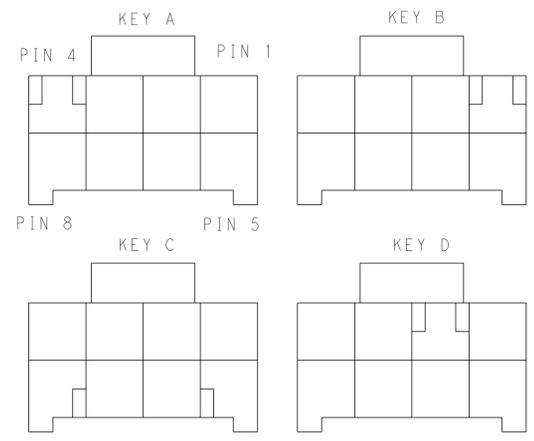



KEYING FOR 2*4 POS.

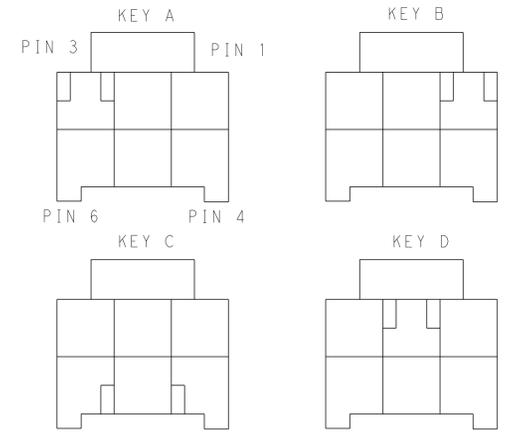


KEYING FOR 2*3 POS.

POS.	MATERIAL	KEY	P/N
2*6	LEVEL 1	KEY A	1-1971776-6
		KEY B	2-1971776-6
		KEY C	3-1971776-6
		KEY D	4-1971776-6
2*6	LEVEL 2	KEY A	5-1971776-6
		KEY B	6-1971776-6
		KEY C	7-1971776-6
		KEY D	8-1971776-6
2*5	LEVEL 1	KEY A	1-1971776-5
		KEY B	2-1971776-5
		KEY C	3-1971776-5
		KEY D	4-1971776-5
2*5	LEVEL 2	KEY A	5-1971776-5
		KEY B	6-1971776-5
		KEY C	7-1971776-5
		KEY D	8-1971776-5

POS.	MATERIAL	KEY	P/N
2*4	LEVEL 1	KEY A	1-1971776-4
		KEY B	2-1971776-4
		KEY C	3-1971776-4
		KEY D	4-1971776-4
2*4	LEVEL 2	KEY A	5-1971776-4
		KEY B	6-1971776-4
		KEY C	7-1971776-4
		KEY D	8-1971776-4
2*3	LEVEL 1	KEY A	1-1971776-3
		KEY B	2-1971776-3
		KEY C	3-1971776-3
		KEY D	4-1971776-3
2*3	LEVEL 2	KEY A	5-1971776-3
		KEY B	6-1971776-3
		KEY C	7-1971776-3
		KEY D	8-1971776-3

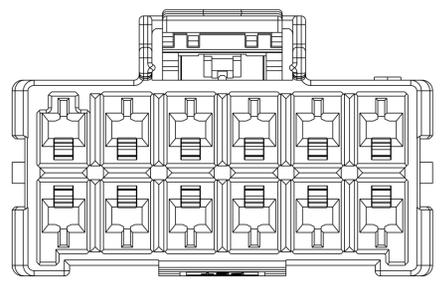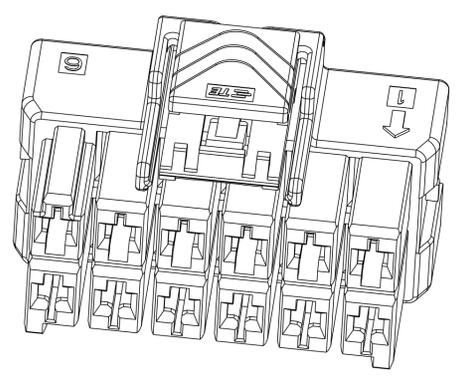

2*6 POSITIONS

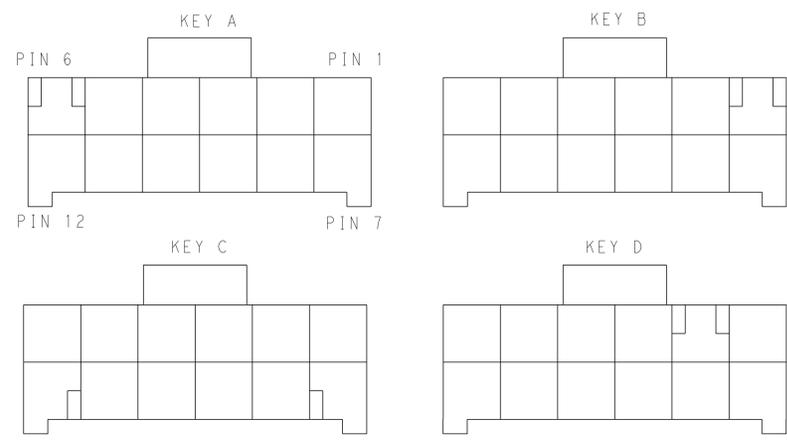

KEYING FOR 2*6 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT. DWG: TOMMY WU 09JUL2012
 CHK: HAPYE WU 09JUL2012
 APVD: YUHONG MAO 09JUL2012

STE TE Connectivity

NAME: PLUG HOUSING, DOUBLE ROW POWER TRIPLE LOCK

PRODUCT SPEC: 108-106118
 APPLICATION SPEC: 114-106118

SIZE: A1 CAGE CODE: 00779 C=1971776 DRAWING NO: 00779 C=1971776 SHEET 2 OF 2 REV D

MATERIAL: . FINISH: . WEIGHT: . SCALE: 4:1

Customer Drawing

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-1971776-5](#)