


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS |     |                      |         |     |      |
|-----|------|-----------|-----|----------------------|---------|-----|------|
| G   | 14   | P         | LTR | DESCRIPTION          | DATE    | DWN | APVD |
|     |      |           | H   | REV PER 0G3A-0946-04 | 27DEC04 | JR  | TM   |

|                                |                                |                                |
|--------------------------------|--------------------------------|--------------------------------|
| <b>AMP</b><br>WIRE RANGE       | Listed<br>FILE E13288          | LR7189<br>Certified            |
| 12-10 AWG<br>SOLID OR STRANDED | 12-10 AWG<br>SOLID OR STRANDED | 12-10 AWG<br>SOLID OR STRANDED |

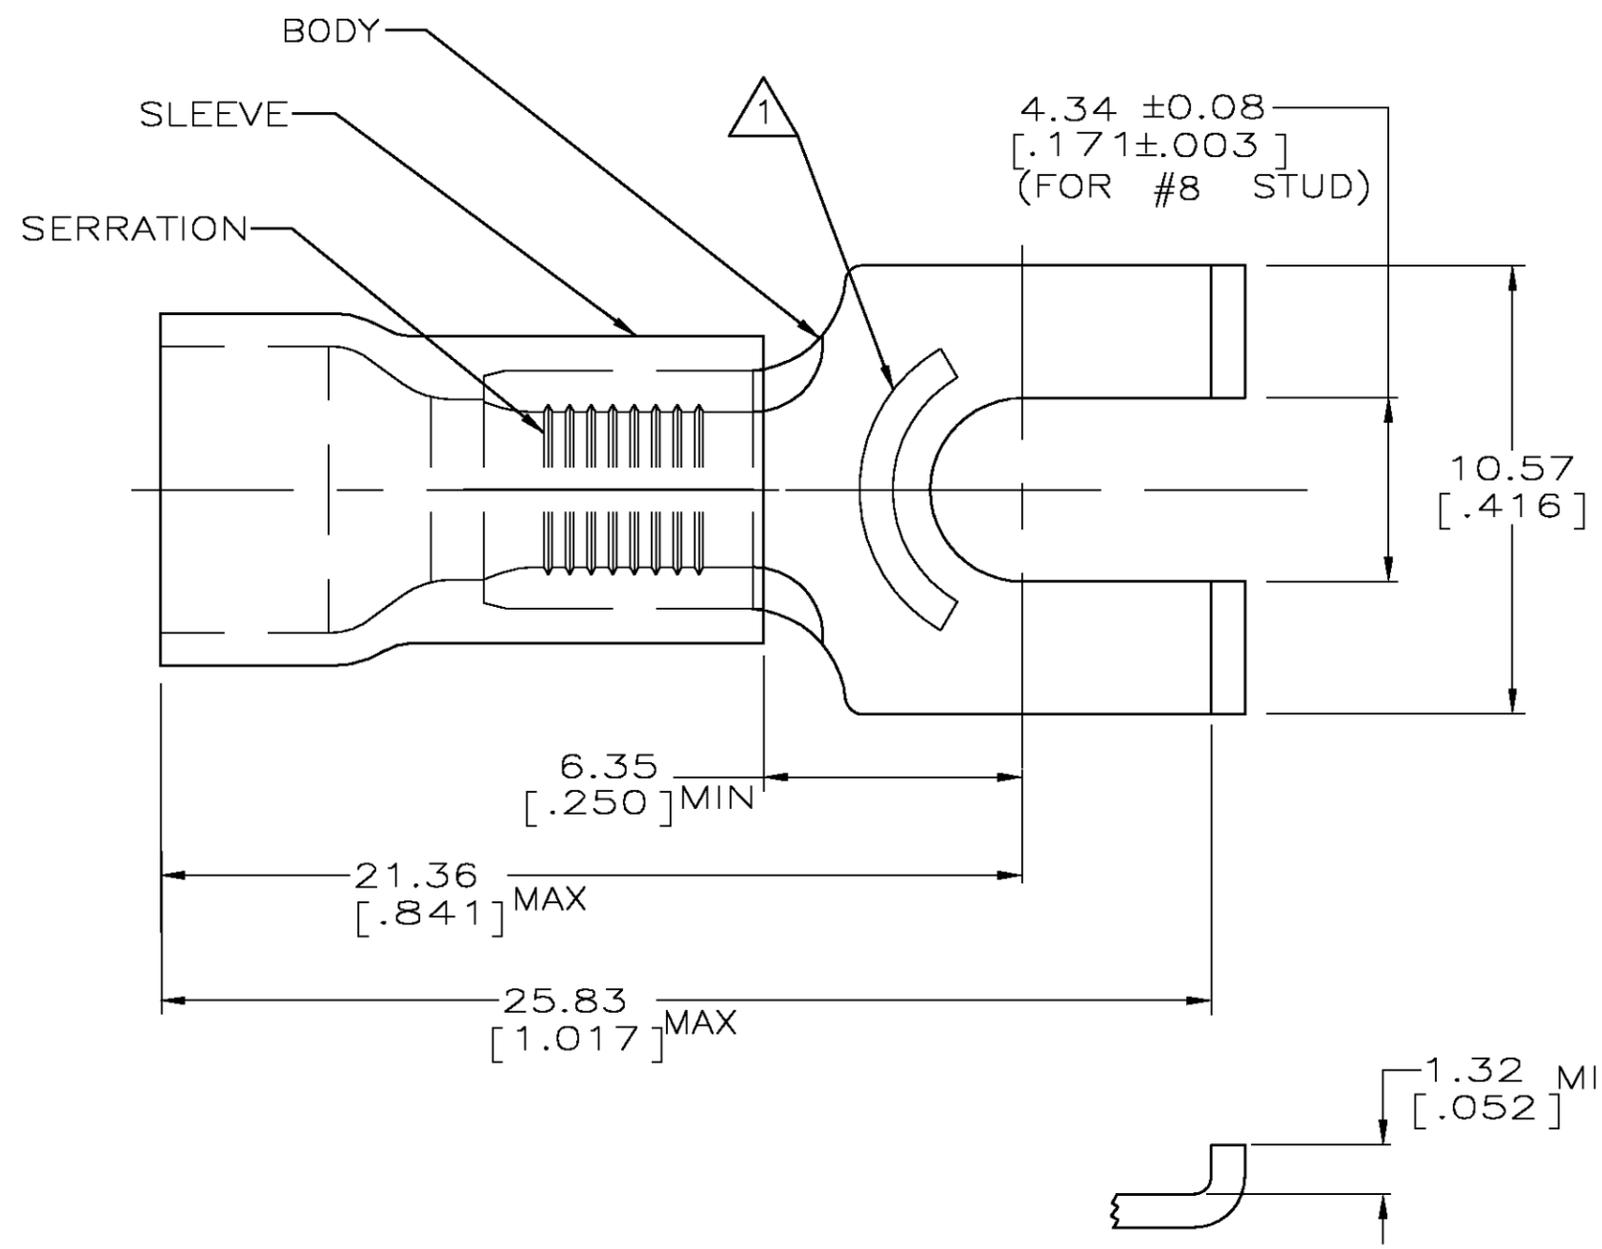

- ① STAMP AMP 12-10\* APPROX AS SHOWN
- 2. WIRE INSUL DIA, 3.81-6.35 [.150-.250]
- 3. TONGUE MATL THK, 1.02±0.05 [.040±.002]
- ④ MATERIAL: BODY - CU PER ASTM B152  
SLEEVE - PVC, COLOR - YELLOW

| 50   | LOOSE PIECE, BOX | 8-324172-2 |
|------|------------------|------------|
| 2500 | ON TAPE, REEL    | 1-324172-0 |
| 500  | LOOSE PIECE      | 324172     |
| QTY  | PACKAGE TYPE     | PART NO    |

|  |  |   |  |   |                            |   |                    |
|--|--|---|--|---|----------------------------|---|--------------------|
| <b>AMP INCORPORATED<br/>CUSTOMER SERVICE SYSTEMS</b>                             |  | MAX RECOMMENDED OPERATING TEMPERATURE:<br>105°C   | THIS DRAWING IS A CONTROLLED DOCUMENT. |   | DWN<br>L OLMEDA<br>05SEP95 | Tyco Electronics Corporation<br>Harrisburg, Pa 17105-3608                 |                    |
| FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS | PRODUCT INFORMATION CENTER<br>1-800-522-6752 | VOLTAGE RATING:<br>600V MAX<br>(1000V FIXTURE OR SIGN)  | DIMENSIONS:<br>mm [INCHES]             | TOLERANCES UNLESS OTHERWISE SPECIFIED:  | CHK<br>M ELLIS<br>05SEP95  | NAME<br>TERMINAL, SPADE, FLANGED,<br>PLASTI-GRIP,<br>WIRE SIZE: 12-10 AWG |                    |
| FOR APPLICATION TOOLING ASSISTANCE CENTER  | TOOLING ASSISTANCE CENTER<br>1-800-722-1111  | CIRCULAR MIL AREA:<br>2.62-6.64mm² [5,180-13,100]<br>SOLID OR STRANDED  |  | 0 PLC ± -<br>1 PLC ± -<br>2 PLC ± 0.20 [.008]<br>3 PLC ± -<br>4 PLC ± -<br>ANGLES ± - | APVD<br>G NGO<br>05SEP95   | PRODUCT SPEC<br>UL 486A   | SIZE<br>A3         |
| FOR ORDER ENTRY  | 1-800-526-5142                               | THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION. | MATERIAL<br>④                          | FINISH<br>TIN PER ASTM B545   | APPLICATION SPEC<br>-      | WEIGHT<br>-   | CAGE CODE<br>00779 |
|  |  |   |  |   | DRAWING NO<br>C-324172     |   | RESTRICTED TO<br>- |
|  |  |   |  |   | CUSTOMER DRAWING           |   | SCALE<br>6:1       |
|  |  |   |  |   |                            |   | SHEET<br>1 OF 1    |
|  |  |   |  |   |                            |   | REV<br>H           |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-324172-2](#)