


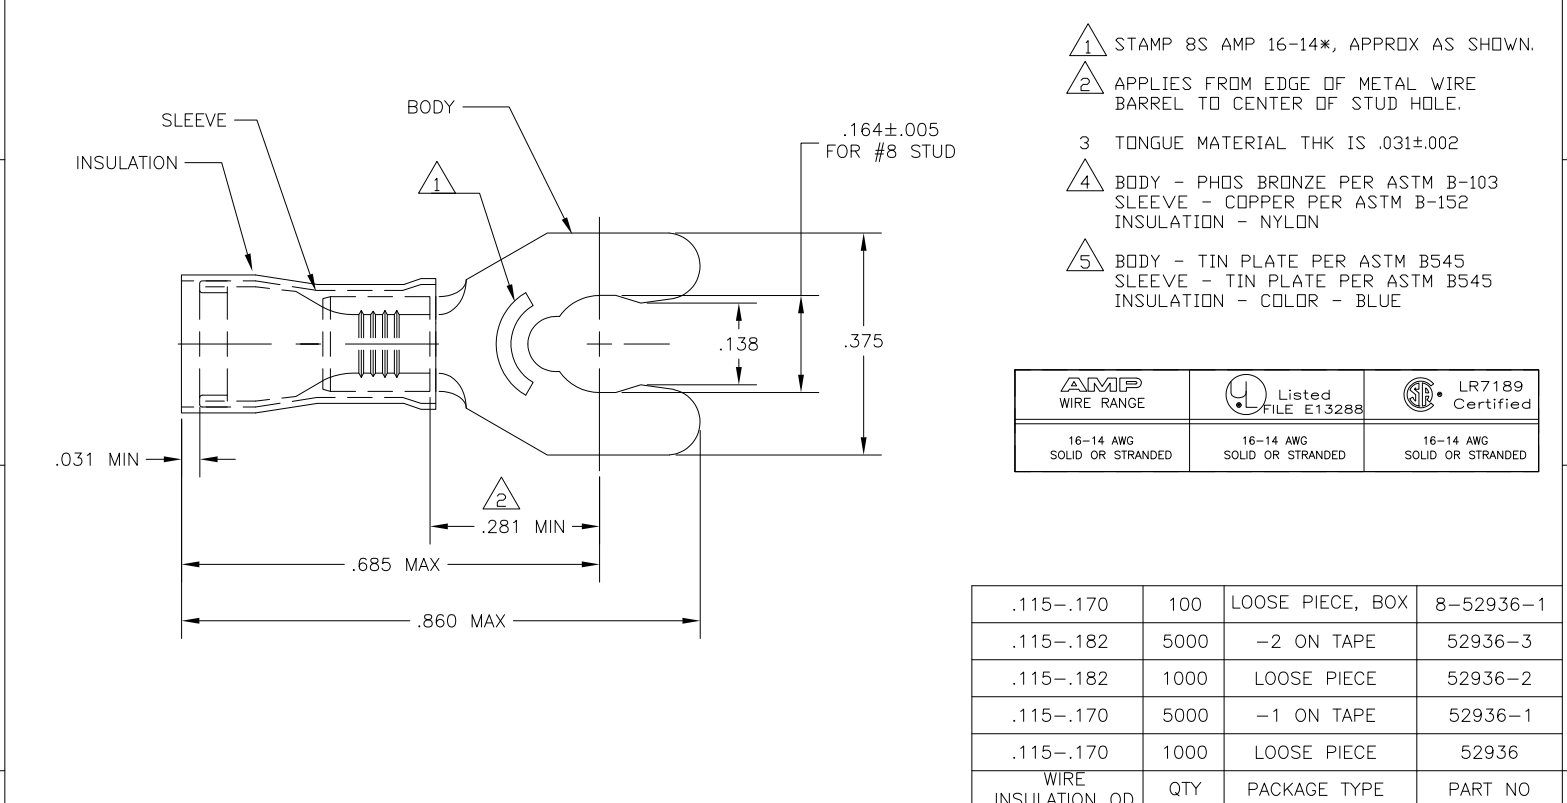

CUSTOMER SERVICE SYSTEMS			MAX. RECOMMENDED OPERATING TEMPERATURE: 105°C	THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN jr ruth 19MAR10		 TE Connectivity		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: 300 V MAX	DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .008 4 PLC ± - ANGLES ± 5°	CHK T MICHELUTTI 19MAR10				
FOR APPLICATION	TOOLING ASSISTANCE CENTER 1-800-722-1111		CIRCULAR MIL AREA: 1.04-2.62mm² [2,050-5,180] SOLID OR STRANDED			APVD T MICHELUTTI 19MAR10	NAME			
TOOLING INFORMATION								TERMINAL, SHORT SPRING SPADE, PIDG, WIRE SIZE: 16-14 AWG -		
FOR ORDER ENTRY	1-800-526-5142		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		MATERIAL	FINISH	APPLICATION SPEC -		RESTRICTED TO	
					- 	- 	WEIGHT -			
CUSTOMER DRAWING							SCALE 6:1		SHEET 1 of 1	REV K2

1470-19 (3/11)