

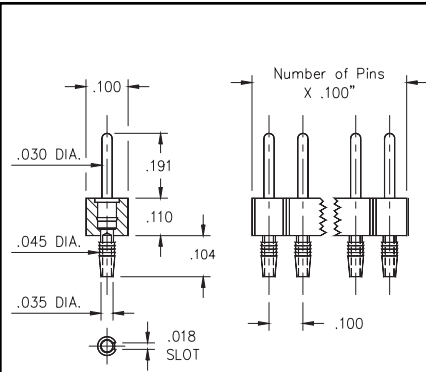


Fig. 1

- The unique compliant tail pins conform to .040" ±.003 finished hole without stressing inner layers.
- Pin headers are offered in two tail lengths for .060"-.100" (MM# 5601) and .090"-.130" (MM# 5602) thick panels. (See page 178 for details)
- Sockets use Hi-Rel, six-finger clips which accept .030" dia. pins and also .025" square pins. (MM# 4614 or 4615). (See page 147 for details)

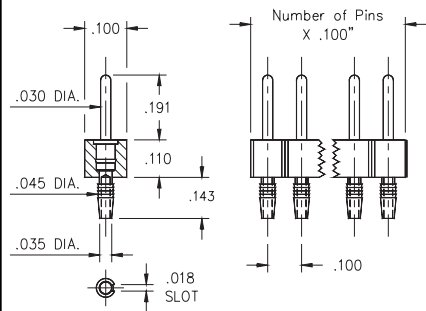


Fig. 2

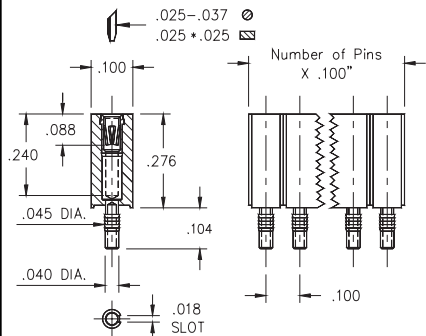


Fig. 3

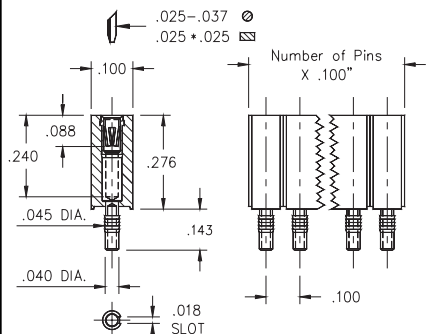


Fig. 4

Ordering Information

Fig. 1

Compliant Tail Pin Header for .060 - .100" thick boards

800-XX-0 _ -61-001000

Specify # of pins → 01-64

Fig. 2

Compliant Tail Pin Header for .090 - .130" thick boards

800-XX-0 _ -62-001000

Specify # of pins → 01-64

RoHS
2002/95/EC

XX= Plating Code
See Below

For RoHS compliance, select **◇** plating code.
For the gold option (XX=10) also change
part number from 800-XX-0XX-6X-001000
to 800-10-0XX-6X-001100

SPECIFY PLATING CODE XX=

10◇

90

40◇

Pin Plating



10μ" Au

200μ" Sn/Pb

200μ" Sn

Fig. 3

Compliant Tail Socket for .060 - .100" thick boards

801-XX-0 _ -61-001000

Specify # of pins → 01-50

Fig. 4

Compliant Tail Socket for .090 - .130" thick boards

801-XX-0 _ -62-001000

Specify # of pins → 01-50

RoHS
2002/95/EC

XX= Plating Code
See Below

SPECIFY PLATING CODE XX=

13◇

93

99

43◇

44◇

Sleeve (Pin)



10μ" Au

200μ" Sn/Pb

200μ" Sn/Pb

200μ" Sn

200μ" Sn

Contact (Clip)



30μ" Au

30μ" Au

200μ" Sn/Pb

30μ" Au

200μ" Sn