

Axial Lead Fuse, 6.3x32 mm, low resistance, up to 30 A

new



UL 248-14 · 250V · Time-Lag T



Description

- Up to 30 A, low resistance
- Ceramic Tube

Standards

- UL 248-14
- CSA C22.2 no. 248.14

Approvals

- UL File Number: E184831

Applications

- Single-phase high current applications up to 30 A

References

[Packaging Details](#)

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)


Technical Data

Rated Voltage	250V
Rated current	12 - 30 A
Breaking Capacity	500A
Characteristic	Time-Lag T
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Tube	Ceramic
Material: Endcaps	Nickel-Plated Brass
Material: Axial Leads	Tin-Plated Copper
Material: Filler	Sand
Unit Weight	3.9 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	, Type, Rated current, Rated Voltage, Approvals

Soldering Methods	Wave, Iron Soldering Profile
Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 5 sec acc. to IEC 60068-2-20, Test Tb, method 1A

Dimension

6.3 mm

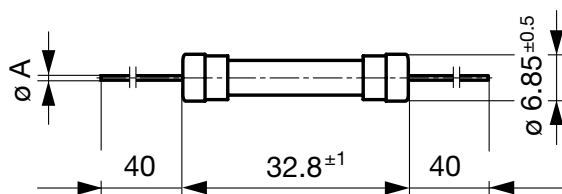

In = 12 A: ØA = 0.8 mm


In ≥ 15 A: ØA = 1.0 mm

Pre-Arcing Time

Rated Current In 1.0 x In min. 1.35 x In max. 2.0 x In min. 2.0 x In max.

12 A - 30 A 4 h 60 min 5 s 60 s

Time-Current-Curves

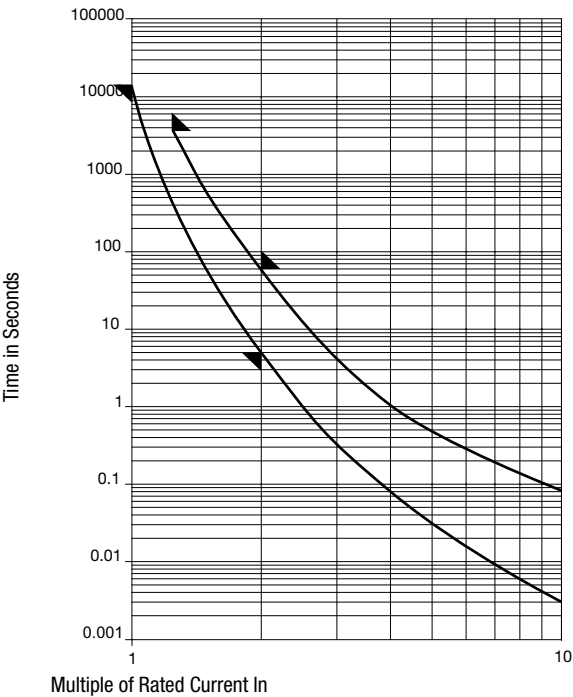

All Variants

Rated Cur- rent [A]	Rated Vol- tage [VAC]	Breaking Capacity	Voltage Drop 1.0 In typ. [mV]	Cold Resi- stance typ. [mΩ]	Melting I²t 10.0 Intyp. [A²s]	Order Number
12	250	1)	78	5.6	72	● 8020.0603.PT
15	250	1)	81	4.7	152	● 8020.0604.PT
20	250	1)	87	3.6	750	● 8020.0605.PT
25	250	1)	62	2.1	1010	● 8020.0606.PT
30	250	1)	64	1.8	2050	● 8020.0607.PT

Availability for all products can be searched real-time:<http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

1) 500 A @ 250 VAC, 10 kA @ 125 VAC

Packaging Unit

Bulk (1000 pcs.)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schurter:

[8020.0603.PT](#) [8020.0604.PT](#) [8020.0605.PT](#) [8020.0606.PT](#) [8020.0607.PT](#)