

INTERCONNECTS

SERIES 350, 450, 801, 803 • .100" GRID (.025" DIA. PINS), LOW PROFILE HEADERS & VERSATILE SOCKETS • SINGLE & DOUBLE ROW STRIPS

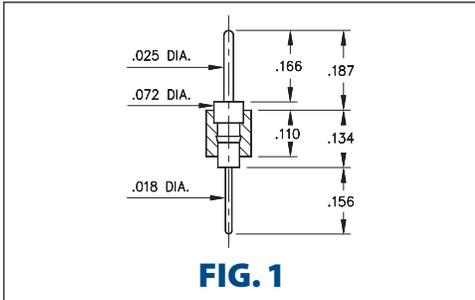


FIG. 1

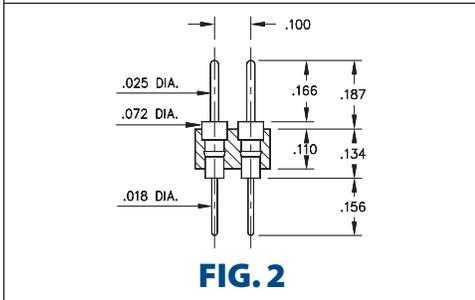


FIG. 2

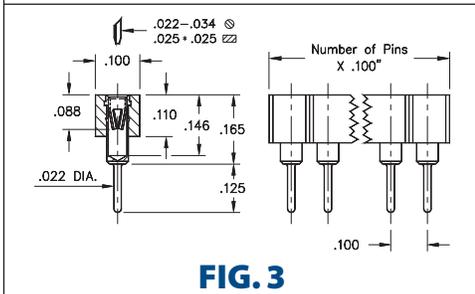


FIG. 3

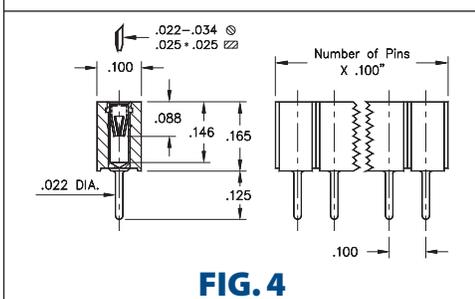


FIG. 4

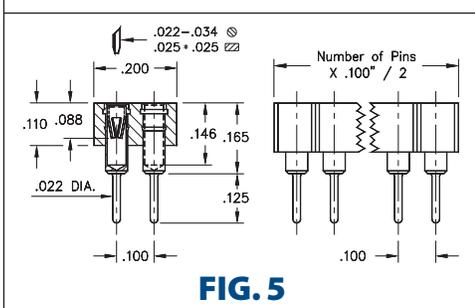


FIG. 5

- Series 350 and 450 single and double row pin headers use MM #0290 pins. See page 215 for details
- Series 801 and 803 single and double row low profile sockets use MM #1303 receptacles. See page 180 for details
- Series 801 and 803 receptacles use Hi-Rel, 6-finger BeCu #16 contact rated at 4.5 amps. Receptacles accept .025" diameter and .025" square pins. See page 256 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations



ORDERING INFORMATION

FIG. 1	Series 350...001 Single Row .025" Pin / .018" Solder Tail	350-XX-1__-00-001000			
	Specify number of pins	↑ 01-64			
FIG. 2	Series 450...001 Double Row .025" Pin / .018" Solder Tail	450-XX-2__-00-001000			
	Specify number of pins	↑ 04-64			
SPECIFY PLATING CODE XX=		10	90	40	
Pin Plating		10 μ" Au	200 μ" Sn/Pb	200 μ" Sn	
FIG. 3	Series 801...003 Low Profile Socket (short insulator)	801-XX-0__-10-003000			
	Specify number of pins	↑ 01-64			
FIG. 4	Series 801...013 Low Profile Socket (long insulator)	801-XX-0__-10-013000			
	Specify number of pins	↑ 01-36			
FIG. 5	Series 803...003 Double Row Low Profile Socket	803-XX-0__-10-003000			
	Specify number of pins	↑ 04-72			
SPECIFY PLATING CODE XX=				41	43
Sleeve (Pin)				200 μ" Sn	200 μ" Sn
Contact (Clip)				10 μ" Au	30 μ" Au



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mill-Max:](#)

[801-43-005-10-003000](#) [801-43-036-10-013000](#) [801-43-064-10-003000](#) [803-43-072-10-003000](#) [801-43-006-10-003000](#)