

Professionally approved products.


Datasheet

Wirewound Potentiometer CLR4000 Series with a 6.35 mm Dia. Shaft 2k Ω $\pm$ 10% 1.5W, Panel Mount

RS Stock 812-825



Dimensions: (mm)

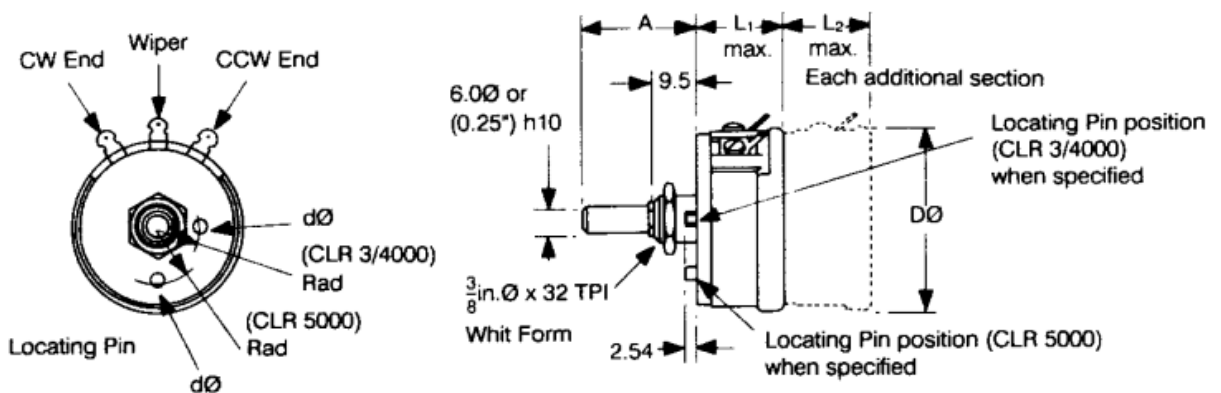

Professionally approved products.


Datasheet

Features

- Up to four sections can be ganged together on a common spindle.
- Phenolic body moulding; nickel silver contact; nickel plated brass spindle and bush; hot tin dipped brass tags.
- Selection Tolerance: $\pm 10\%$
- Terminal Resistance: Maximum of $0.2\ \Omega$ or 0.01% ($1\ \Omega$ or 0.1% : CLR 7000) f nominal resistance whichever is the greater
- Rational Noise: $100\ \Omega$ E.N.R maximum
- Temperature Characteristic of Resistance: $+ 0.75\%$ ($+20^{\circ}\text{C}$ to $+ 70^{\circ}\text{C}$)
- Insulation Resistance: $1000\text{M}\ \Omega$ minimum at 500v d.c
- Isolation Voltage: 1000V a.c peak
- Linearity: 1% typical, 2% maximum

Series 4000 Electrical Specification	
Power Rating @ 70°C Linear Law	1.5W
Angle of effective rotation	$275^{\circ} \pm 5^{\circ}\text{C}$
Total mechanical rotation	$290^{\circ} \pm 10^{\circ}\text{C}$
Limiting element voltage d.c or a.c . R.m.s	500V

Standard Resistance Laws

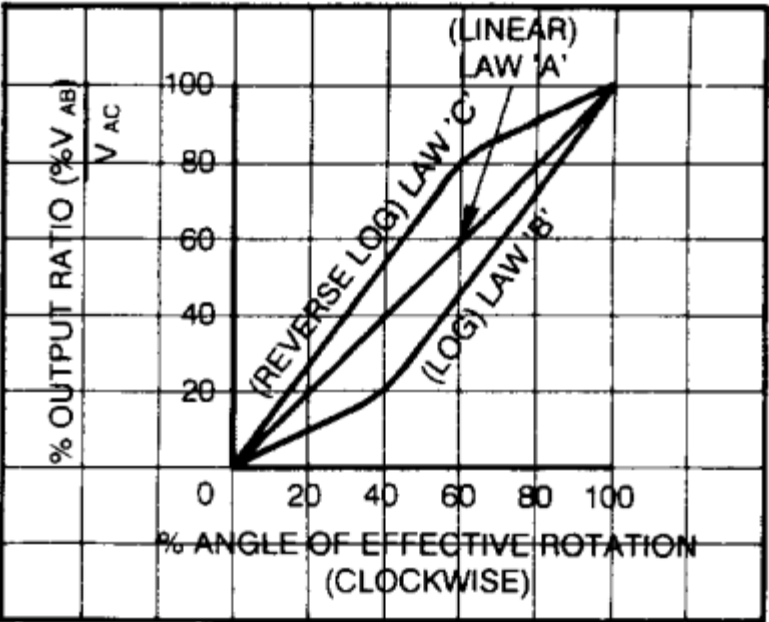

Alignment (Ganged Units)
Sections are aligned to within + 1% at reference point of zero effective rotation

Professionally approved products.

Datasheet

Mechanical Rotation

- Starting Torque: 7 to 35mNm
- Rotational Life: 20,000 cycles
- No of Gangs (max) : 4
- End Stop Torque: 1100Nm

Environmental Specification

- Vibration: 10 to 500Hz; 10g; Rac $\leq$ 1%
- Bump: 4000 bumps; 390m/s², 40g; Rac $\leq$ 1%
- Load Life: 1000h at rated dissipation ; Rac $\leq$ 1%

