

REVISION -
04/21/92 YN

REVISION A
TEMECULA
WAS CARSON
REFORMATTED
10/10/96 DS

REVISION B
CHANGED KR
TO B, TAIWAN
TO CHINA AND
CSA FILE NO
06/30/04 JC

AC-AC UL/CSA ADAPTOR 14VAC 850mA

- A. Electrical specifications
1. Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
 2. Output voltage and current: AC 14V 850mA

Vin	850mA Load	85mA Load
108	11.6 VAC MIN	16.9 VAC MIN
120	13.2-14.6 VAC	18.7 VAC MAX
132	-	-



NOTE: Specification applies after 10 minutes warm-up with 850mA load and at any operating temperature

3. Operating temperature: 0 ° C to +40 ° C
4. Storage temperature: -20 ° C to +85 ° C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: AC 1500Vrms 1 minute @ input to output


- B. Typical performance data test condition: Ta = +25° C, measured after 10 minute warm-up with input at 120V 60Hz

- C. Safety agencies
- UL File No. E82180
CSA File No. LR38236

- D. Nameplate: Information is as follows:
Metallic letters on a black background

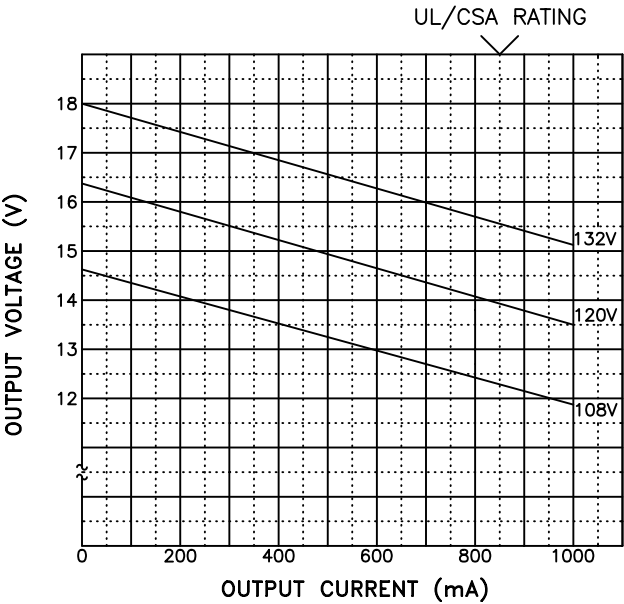

- E. Mechanical Specifications
- All dimensions shown are nominal unless otherwise specified

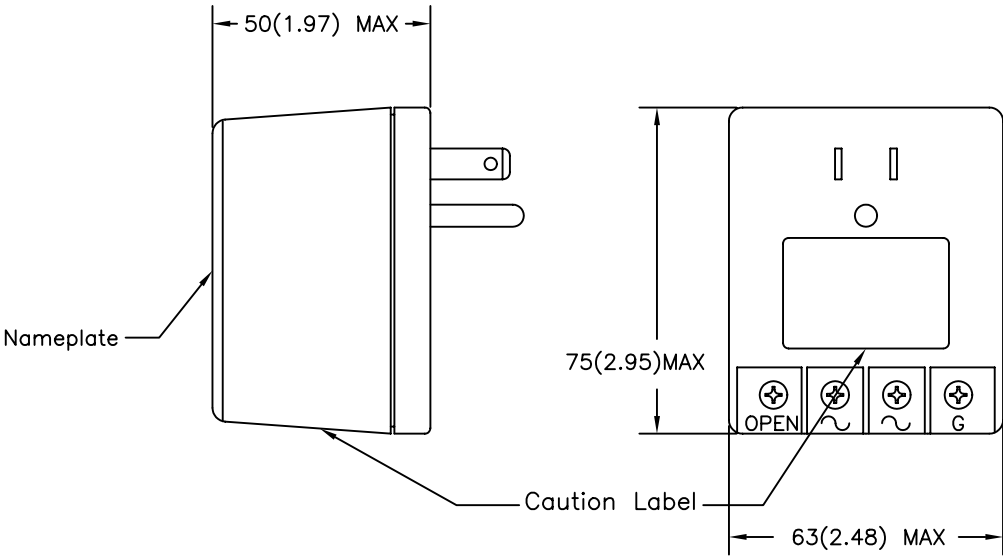

PREPARED BY:

D. Rund

ENGINEER:

Y. Sekiguchi

QUALITY CONTROL:

T. Clem

APPROVED:

J. Coleman

DWG CONTROL NO.
P-A7-10658
ACAD\PS\A7106581.DWG

REV
B

UL/CSA AC 14V 850mA
POWER SUPPLY

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

820A0062-03

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.