

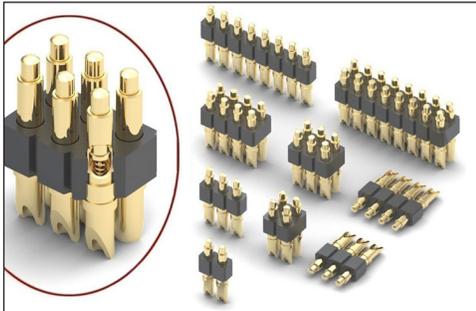


SPRING-LOADED CONNECTORS

SERIES 824 & 826 • 2,54 GRID SOLDERCUP HEADER • SINGLE AND DOUBLE ROW STRIPS

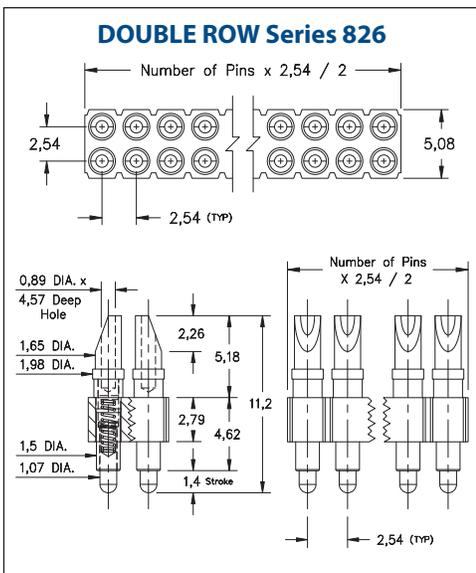

- Modular contacts for use on 2,54 grid, supplied in single and double row contact strips
- Precision-machined piston / base and gold-plated components assure a 1,000,000 cycle life durability
- Pistons have a 0,7 mid. stroke and a 1,4 max. stroke
- Low resistance, high current contacts are rated at 2 amps continuous, 3 amps peak
- Insulators are high temperature thermoplastic
- Both 824 & 826 series strips have spring pins with wire termination soldercups. The soldercups are aligned to provide easy access for soldering up to size 22 AWG wires

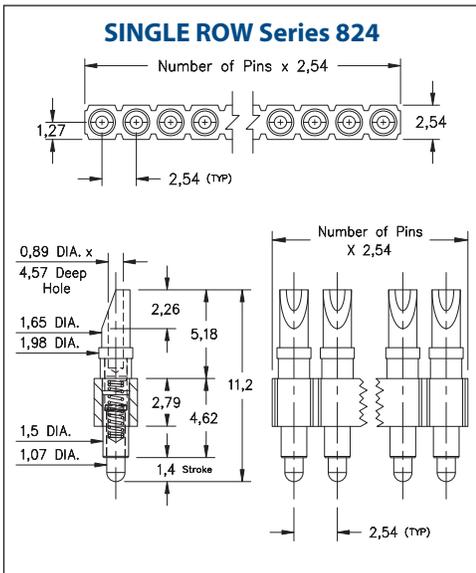

ORDERING INFORMATION

Single Row Series 824
824-22-0XX-00-001000 ↑ Specify number of contacts 01-64
Double Row Series 826
826-22-0XX-00-001000 ↑ Specify number of contacts 04-72

Technical Specifications

Materials:

Contact piston & base: Machined copper alloy plated 0,51µm gold over 2,54µm nickel
 Spring: Beryllium copper-plated 0,25µm gold
 Insulator: High temperature thermoplastic, rated UL94 V-0

Mechanical:

Spring force @ initial height: 25 grams
 Spring force @ mid stroke (0,7): 60 grams
 Durability: 1,000,000 cycles

Electrical:

Voltage rating: 100Vrms/150Vdc
 Current rating: 2A (continuous), 3A (peak) per contact
 Contact resistance: 20mΩ max.
 Insulation resistance: 10,000MΩ min.
 Dielectric strength: 700Vrms min.
 Capacitance: 1pF max.

RoHS-2
2011/65/EU

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[826-22-004-00-001000](#) [824-22-010-00-001000](#) [824-22-003-00-001000](#) [824-22-005-00-001000](#) [824-22-002-00-001000](#) [826-22-012-00-001000](#) [824-22-008-00-001000](#) [826-22-018-00-001000](#) [824-22-004-00-001000](#) [824-22-006-00-001000](#) [826-22-014-00-001000](#) [826-22-016-00-001000](#) [826-22-008-00-001000](#) [826-22-006-00-001000](#) [824-22-007-00-001000](#) [826-22-020-00-001000](#) [826-22-010-00-001000](#)