
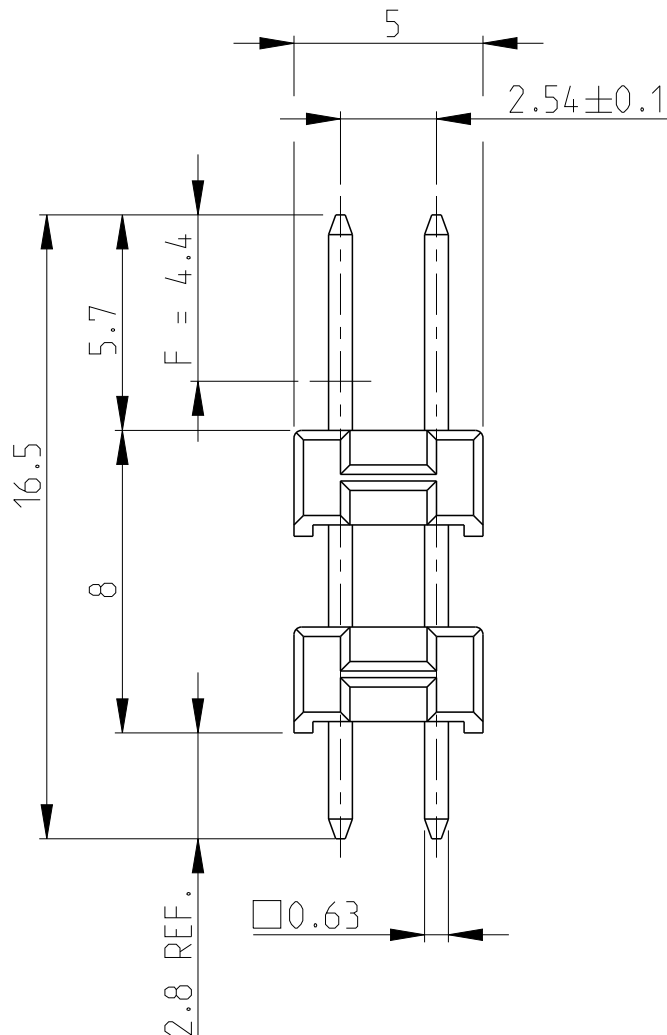


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
A1	-					
		D		CONTACT PIN MATERIAL AND PLATING CHANGE	21JUL2014	KJK JK

POS. PER ROW	L +0.3 -0.6	PART NUMBER	POS. PER ROW	L +0.3 -0.6	PART NUMBER
-	△ 2	827 988-1	-26	66.04	2- 827 988-6
2	5.08	827 988-2	-27	68.58	2- -7
3	7.62	↑ 3/△	-28	71.12	2- ↑ -8
4	10.16	↑ 4/△	-29	73.66	2- ↑ -9
5	12.70	-5	-30	76.20	3- -0
6	15.24	6/△	-31	78.74	3- -1
7	17.78	-7	-32	81.28	3- -2
8	20.32	8/△	-33	83.82	3- -3
9	22.86	9/△	-34	86.36	3- -4
10	25.40	1- 0/△	-35	88.90	3- -5
11	27.94	1- -1/△	-36	91.44	3- -6
12	30.48	1- -2	-37	93.98	3- -7
13	33.02	1- -3/△	-38	96.52	3- -8
14	35.56	1- -4/△	-39	99.06	3- -9
15	38.10	1- -5/△	-40	101.60	4- -0
16	40.64	1- -6/△	-41	104.14	4- -1
17	43.18	1- -7/△	-42	106.68	4- -2
18	45.72	1- -8/△	-43	109.22	4- -3
19	48.26	1- -9/△	-44	111.76	4- -4
20	50.80	2- 0/△	-45	114.30	4- -5
21	53.34	2- 1/△	-46	116.84	4- -6
22	55.88	2- -2/△	-47	119.38	4- -7
23	58.42	2- 3/△	-48	121.92	4- -8
24	60.96	2- 4/△	-49	124.46	4- -9
25	63.50	2-827 988-5/△	-50	127.00	5- 827 988-0

△
3
OBSOLETE

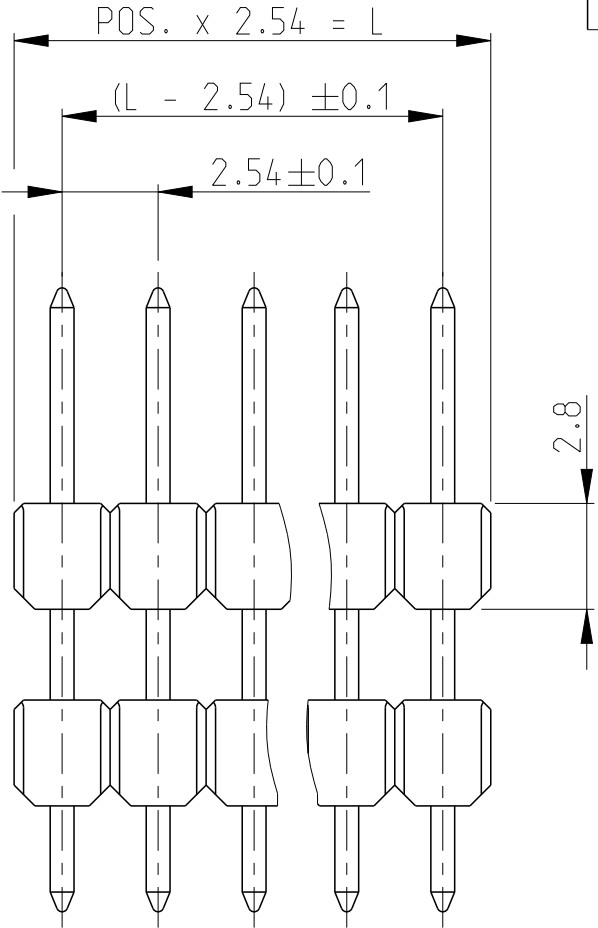


1 MATING SIDE: MIN. 0.7 µm PdNi + MIN. 0.1 µm GOLD FLASH
BY AREA "F" OVER 1.27 µm NICKEL
SOLDER SIDE: MIN. 3 µm TIN OVER 1.27 µm NICKEL

2 827988-1 SUPERSEDED BY 2-827988-0


3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

4 OBSOLETE

△ 1	CuZn	CONTACT PIN KONTAKTSTIFT
COLOUR GREEN	PBT	PIN HOUSING STIFTGEHAEUSE
REMARK BEMERKUNG	MATERIAL	DESCRIPTION BEZEICHNUNG

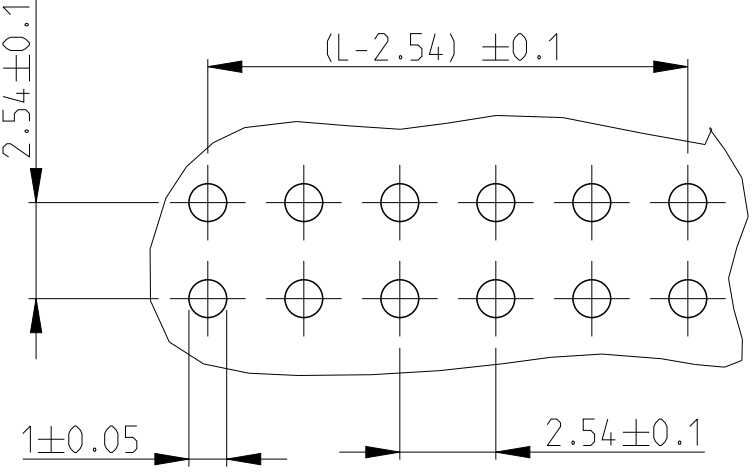

PC BOARD LAYOUT
LEITERPLATTEN-
ANSCHLUSSBILD

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G.HOLAUS	17 JUL 1989		TE TE Connectivity						
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2mm		CHK M.SCHAARSCHMIDT	NAME AMPMODU II SPECIAL PIN HEADER DUAL ROW						
		APVD -		PRODUCT SPEC 108-18012							
		APPLICATION SPEC -		SIZE A3					CAGE CODE 00779	DRAWING NO C-827988	RESTRICTED TO -
		WEIGHT -									
MATERIAL SEE TABLE		FINISH SEE TABLE		CUSTOMER DRAWING				SCALE 5:1	SHEET 1	OF 1	REV D