

Professionally approved products.


Datasheet

NewRS 28V dc Wire Leads Magnetic Buzzer, $\geq 105\text{dB}$ Continuous, Slow & Fast Pulse

RS Stock 837-7850



Dimensions: (mm)

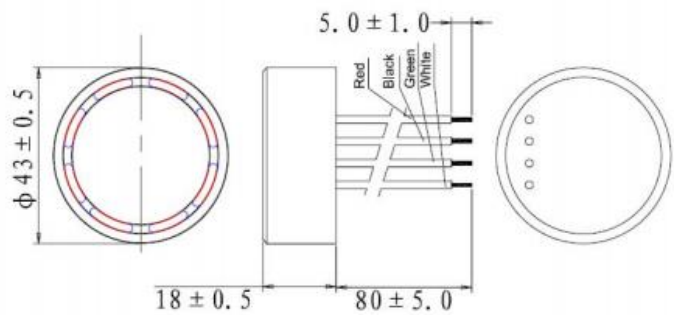

Wiring Instruction:

Red = positive supply

Black = continuous tone

Green = slow pulse

White = fast pulse

Specifications

ABI-046-RC

| | |
|-----------------------|-------------------------------|
| Rated voltage | 12VDC |
| Operating voltage | 6~28VDC |
| Rated current* | $\leq 25\text{mA}$ |
| Sound output at 30cm* | $\geq 105\text{dB}$ |
| Coil resistance | $2900\Omega \pm 500\text{Hz}$ |
| Operating temperature | $-20 \sim +70^\circ\text{C}$ |
| Storage temperature | $-30 \sim +80^\circ\text{C}$ |
| Weight | 20g |

*Value applying at rated voltage (DC)

Features

- ROHS compliant
- Multi tone sounder - continuous tone, slow and fast pulse
- Housing material: PBT
- Wire leads: UL1007 – AWG26

All data at 25°C unless otherwise specified