

Relay socket for industrial relays; 2 and 4 changeover contacts; for DIN 35 rail; FRONT-ENTRY; Push-in CAGE CLAMP[®] CONNECTION; HORIZONTAL TYPE

Item No.: 858-100



Relay socket for industrial relays; 2 and 4 changeover contacts; for DIN 35 rail; FRONT-ENTRY; Push-in CAGE CLAMP[®] CONNECTION; HORIZONTAL TYPE

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	858-100
GTIN / EAN	4045454909154
Content	1
Order amount	1
Customer item number	

Notes

Max. continuous current: 4 x 6 A (4 changeover contacts); 2 x 12 A (2 changeover contacts)


Technical data

Miscellaneous

Pollution degree (1)	2
Rated voltage EN (1) [V]	250 [V]
Rated surge voltage (1) [kV]	4 [kV]
Dielectric strength	4 kVeff (depending on relay)
Max. switching voltage	250 V AC
Max. switching power (resistive)	4000 VA AC
Nominal operating mode	continuous duty
Nominal input voltage VN	depending on Relay; max. 250 V AC

Technical data	
Ambient operating temperature	-25 °C ... +70 °C (depending on relay)
Degree of protection	IP20
Connection technology (1)	Push-in CAGE CLAMP [®]
Solid sizes 1	2 x 0.34 ... 2 x 1.5 mm ² / 1 x 2.5mm ² / 2 x 22 ... 2 x 16 AWG
Strip length 1	9 ... 10 mm / 0.35 ... 0.39 in
Weight [g]	56.53 [g]
Width	31 mm / 1.22 in
Height from upper-edge of DIN-rail [mm]	39 [mm]
Height from upper-edge of DIN-rail	39 mm / 1.535 in
Length	97 mm / 3.819 in
Storage temperature	-40 °C ... +80 °C
Standards/specifications	EN 60664-1

Images & drawings

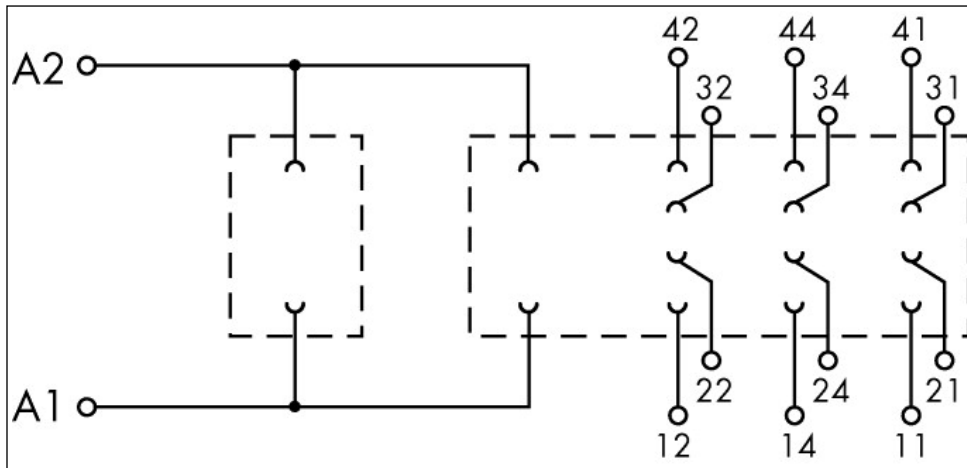

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.