



DIMENSIONS

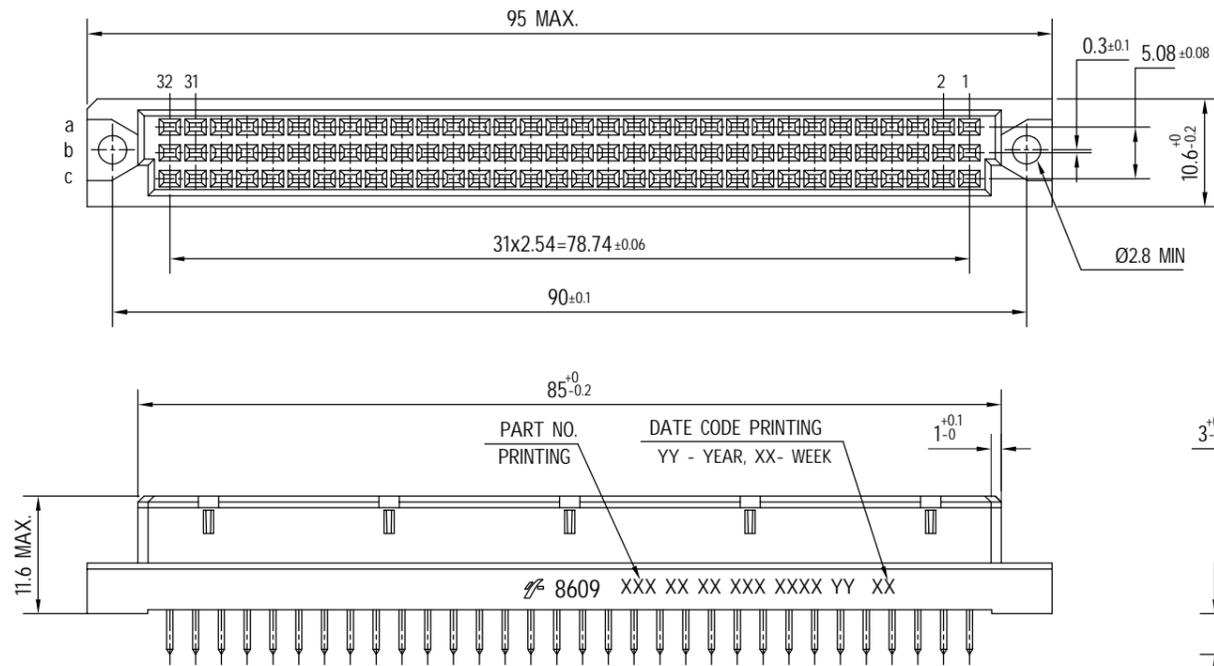

P.C.B LAYOUT

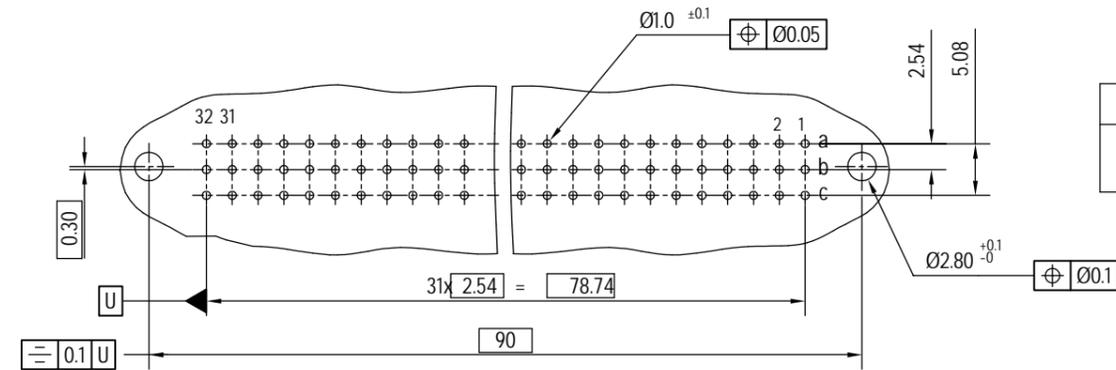


CONTACT ARRANGEMENT

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
a	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
b	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
c	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

STANDARD CONTACT
 EMPTY CAVITY
 FMLB CONTACT
 LMEB CONTACT

GENERAL CHARACTERISTICS & RoHS INFO
REFER DRAWING C-8609-0000A

TERMINATION

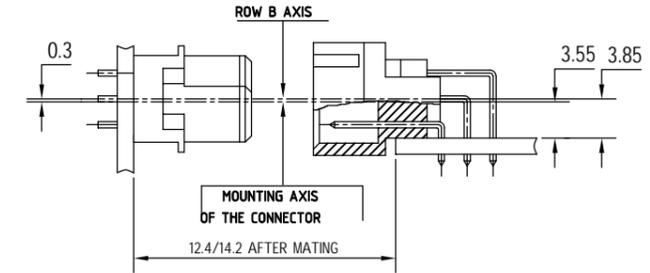

ORDERING INFORMATION

SERIES	8609	3	51	8	1	14	7	5	0	TELF
ROWS FITTED WITH CONTACTS										
ROW a b c										
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW FEMALE INSULATOR	8									
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE C	1									
TERMINATION										
LONG STRAIGHT SPILL (L=SEE TABLE)	14									
OPTIONS										
NO OPTION	7									
PERFORMANCE CLASS										
DIN 41612 CLASS 3	4									
DIN 41612 CLASS 2	5									
DIN 41612 CLASS 1	6									
AS PER MIL C 55302 / JSS 50808	8									
PITCH PER ROW										
MIXED PITCH	0									
LEAD FREE VERSION SPL CONTACTS LOADING	TELF									

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302		ISO 406 ISO 1101		mm		8609	
ltr		ecn no		dr		date		title	
A		109-0064		JS		25/05/2009		DIN STANDARD RECEPTACLE STRAIGHT DIN 41612 STYLE-C	
sheet index		revision sheet		A		1		dwg no	
								sheet 1 of 1 size	
								C-8609-2191 A3	
								type	
								Product Customer Drawing	



Copyright FCI

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[86093518114750TELF](#) [86093518114740TELF](#)