

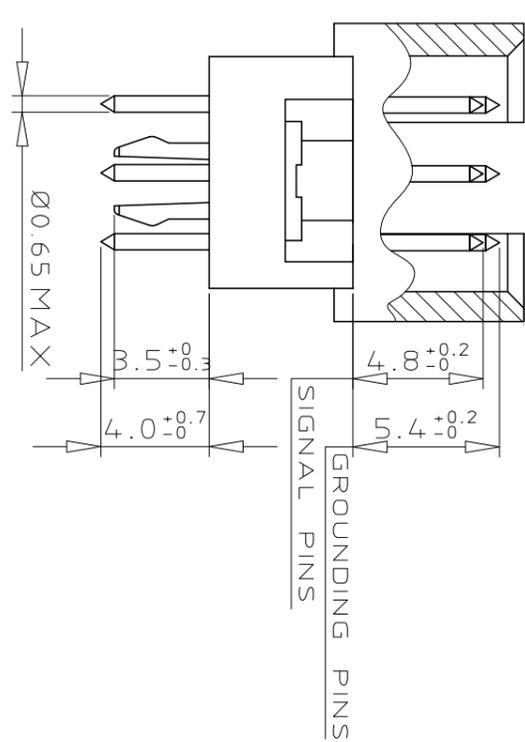
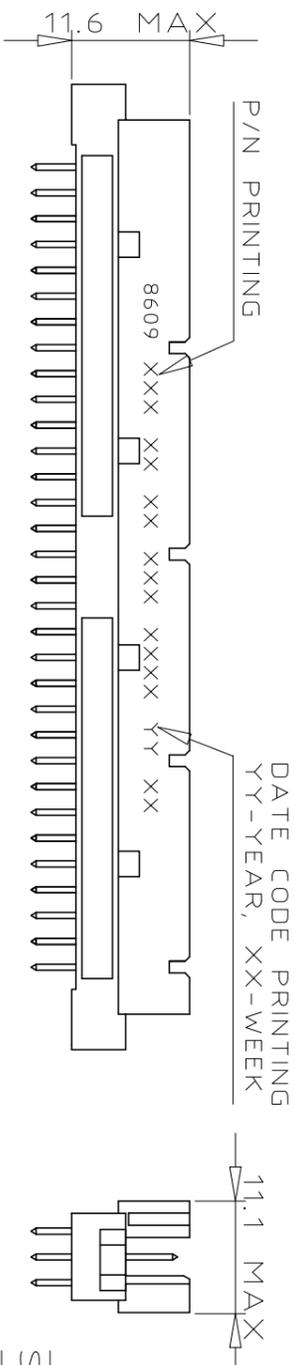


DIMENSIONS

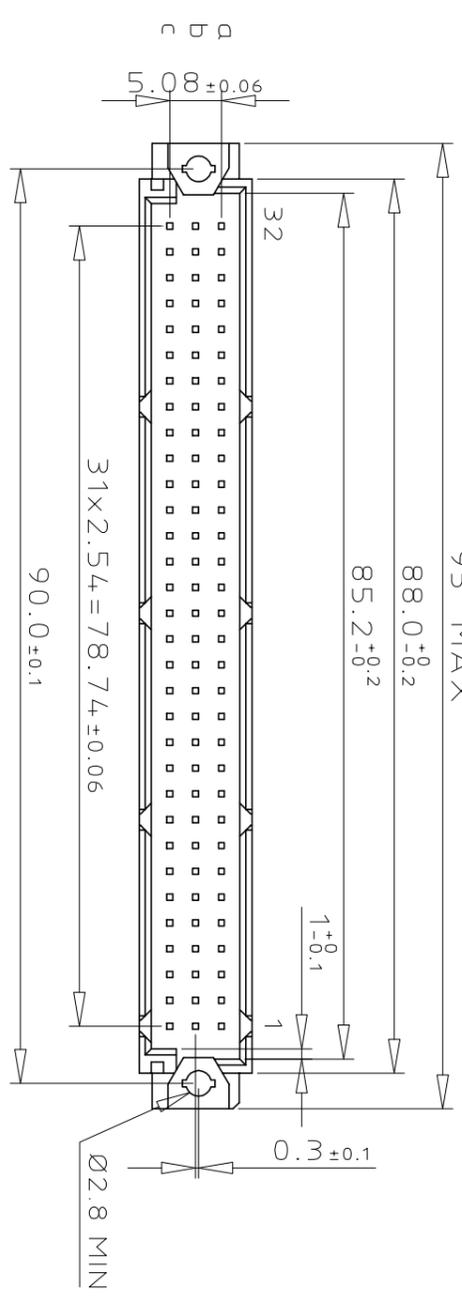

PCB LAYOUT

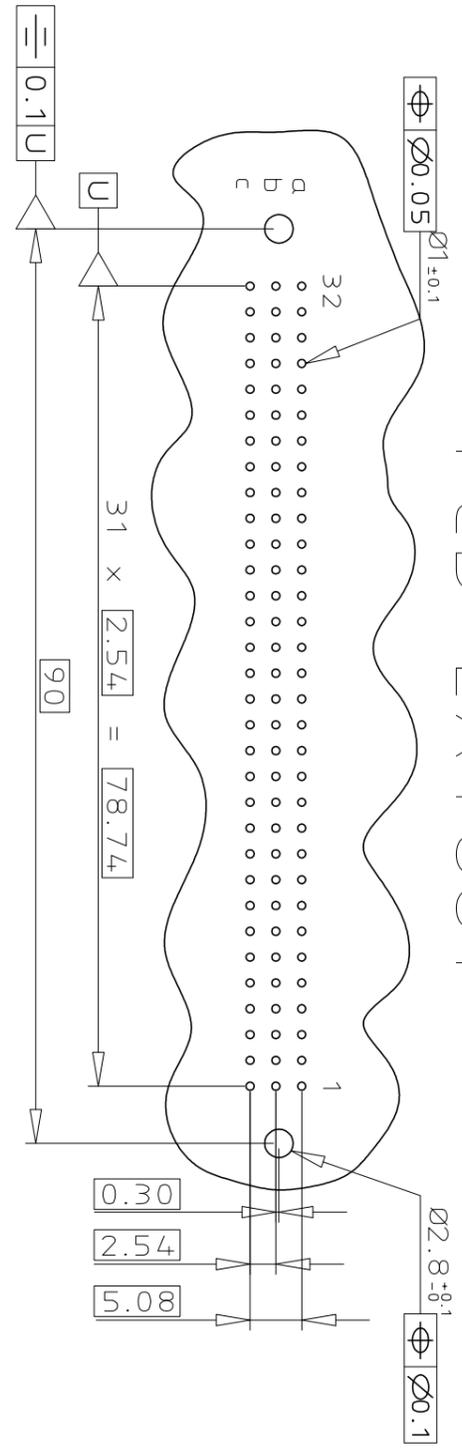

CONTACT ARRANGEMENT

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32		
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

STANDARD CONTACT
 EMPTY CAVITY
 FMLB CONTACT
 LMEB CONTACT

GENERAL CHARACTERISTICS & ROHS INFO
REFER DRAWING C-8609-0000A

ORDERING INFORMATION

SERIES	8609	3	96	7	8	14	7	4	5	UMLF	
ROWS FITTED WITH CONTACTS	Row a	b	c								96
NO. OF CONTACTS											
TYPE OF INSULATOR											
3 ROW MALE INSULATOR											
METHOD OF MOUNTING											
REVERSE MOUNTING - STYLE R											
TERMINATION											
STRAIGHT SPILL											
OPTIONS											
NO OPTION WITH HARPOONS											
PERFORMANCE CLASS											
DIN 41612 CLASS 3											
DIN 41612 CLASS 2											
DIN 41612 CLASS 1											
AS PER MIL C 55302 / JSS 50808											
PITCH PER ROW											
2.54 mm											
LEAD FREE VERSION - SPL LOADING											
UMLF											

mat'l. code	SEE DWG C-8609-0000A	surface	ISO 1302	tolerance	ISO 406	ISO 1101	projection	mm	product family	8609			
tr	ecn no dr	ddte	tolerances unless otherwise specified	0.X	±0.1	±0.1	mm	mm	title	DIN REVERSE HEADER			
A	110-0130	KR	2010-06-11	linear	0.XX	±0.1	SCDLE 3:2	mm	STRAIGHT SPILL DIN 41612 STYLE R				
sheet index	revision	sheet	1	dr	KESAVAN R	2010-06-11	engr	KESAVAN R	2010-06-11	dwg no	sheet 1 of 1	size	A3
				chr	KESAVAN R	2010-06-11	pppd	BIJU K PAUL	2010-06-11	type Product	Customer Drawing		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI:

[86093967814755UMLF](#) [86093967814H55UMLF](#)