DIMENSIONS mm (inches)

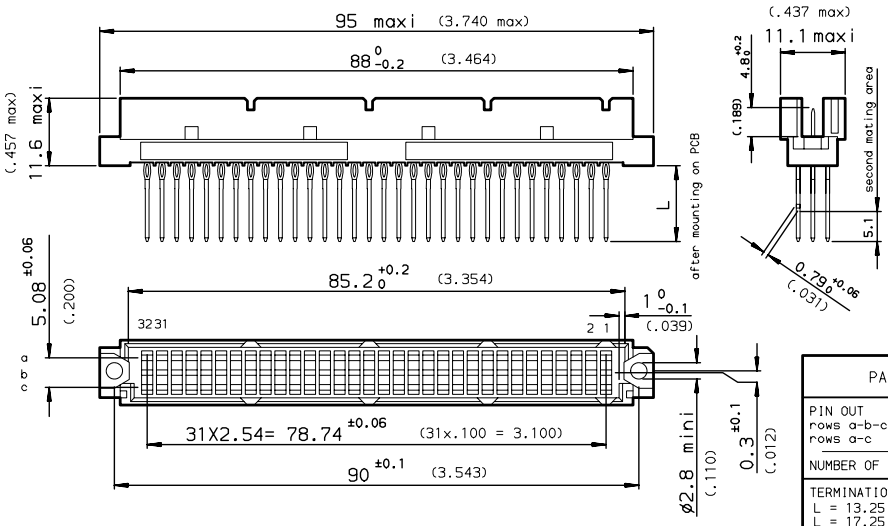

PCB DRILLING

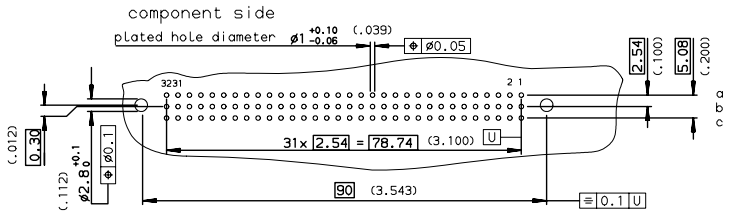

PART NUMBER	8609	□	□	78	□	7	□	5	□

PIN OUT
- rows a-b-c — 3 — 96
- rows a-c — 4 — 64

NUMBER OF CONTACTS

TERMINATION
- L = 13.25 ±0.25(.521) — rear plug up — 96
- L = 17.25 ±0.25(.679) — rear plug up + 1 wrap — 97
- L = 20.00 ±0.25(.787) — rear plug up + 2 wraps — 98

PERFORMANCE CLASS
- DIN 41612 class 3 — 4
- DIN 41612 class 2 — 5
- DIN 41612 class 1 — 6

TERMINATION TYPE
- TIN LEAD — 000
- LEAD FREE — LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

European Views

rev	ecn no	dr	date
D	-	ATC	1998/12/09
E	LS05-004	JTA	2005/02/26
F	LS06-0095	LGO	2006/06/15
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com

surface	tolerance std	projection	
ISO 1302	ISO 406 ISO 1101		mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

Dr	ROUILLARD	1992/07/07	ANGULAR	LINEAR	0.X	±0.1	size A3 / Scale 1.5
Eng	TARON	1992/07/07			0.XX	±0.1	
Chr	LEGARE	1992/07/07	0.XX° ±2°		0.XXX	±0.1	ECN LS06-0095
Appr	LEGARE	1992/07/07	Product family		Din 8609		Spec ref -

title: STRAIGHT MALE - STYLE R
PRESS FIT REAR PLUG UP

dwg no: C-8609-0285 Rev. F

catalog no -

CUSTOMER sheet 1 of 1

REV F - 2006-04-17

PDM: Rev:F STATUS: Released Printed: Sep 24, 2010

Copyright FCI.

Downloaded from Elcodis.com electronic components distributor