


PART NUMBER		8609		78				5	
PIN OUT									
rows a-b-c		---	---	---	---	---	---	---	---
rows a-c		---	---	---	---	---	---	---	---
NUMBER OF CONTACTS									
TERMINATION									
L = 2.70 ±0.25 (.106)		---	---	---	---	---	---	---	24
L = 4.65 ±0.25 (.183)		---	---	---	---	---	---	---	14
OPTIONS									
no option		---	---	---	---	---	---	---	7
with harpoons		---	---	---	---	---	---	---	H
		---	---	---	---	---	---	---	A
		---	---	---	---	---	---	---	R
PERFORMANCE CLASS									
DIN 41612 class 3		---	---	---	---	---	---	---	4
DIN 41612 class 2		---	---	---	---	---	---	---	5
DIN 41612 class 1		---	---	---	---	---	---	---	6
TERMINATION TYPE									
TIN LEAD		---	---	---	---	---	---	---	000E1
LEAD FREE		---	---	---	---	---	---	---	E1LF

PCB DRILLING

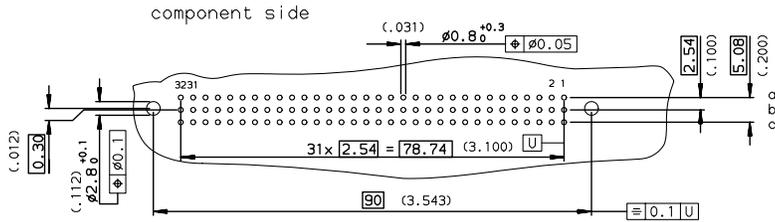

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000A

European Views

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED		
Dr	ROUILLARD	23/06/92	ANGULAR	0.X ±0.1
Eng	LEGALLIC	23/06/92	LINEAR	0.XX ±0.1
Chr	LEGARE	23/06/92	0.XX ±2	0.XXX ±0.1
Appr	LEGARE	23/06/92	Product family	DIN Spec ref -
Title		STRAIGHT HEADER - STYLE R		Rev.
catalog no		SOLDER TO BOARD		E
		pkg no	C-8609-0265-2	
		CUSTOMER sheet 2 of 2		

rev	ecn no	dr	date
C	-	ROU	2002/08/28
D	LS05-001	JTA	2005/03/01
E	LS06-0089	LGO	2006/06/01
-	-	-	-
-	-	-	-
-	-	-	-

REV F - 2006-04-17

3 PDM: Rev:E STATUS:Released Printed: Sep 24, 2010