


MALE SCREW LOCK

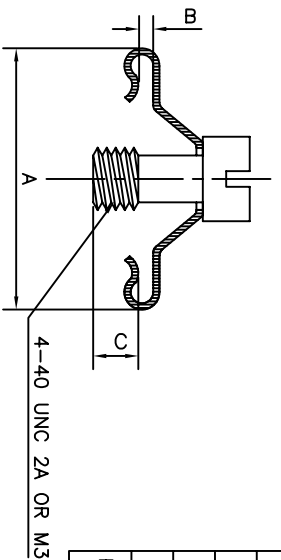


8630-15	17 Max	1.40 ^{3s}	4.0 Max
8630-08	14.5 Max	1.40 ^{3s}	3.4 Max
8630-05	14.5 Max	1.10 ^{3s}	4.0 Max
8630-04	14.5 Max	1.70 ^{3s}	4.0 Max
8630-03	17.0 Max	1.1 ^{3s}	4.0 Max
PART NO:	A	B	C
	DIMENSIONS		

MATERIAL
CLAMP: STEEL
SCREW: STEEL

- NOTE:
1. PART NO. INDICATED ARE PLATED REFERS TO SCREW WITH M3 THREAD AS STANDARD VERSION.
FOR 4-40 UNC 2A THREAD PLEASE ADD SUFFIX 'N' TO THE CORRESPONDING PART NO.
2. ADD LF SUFFIX FOR LEADFREE PARTNUMBERS

FEMALE SCREW LOCK

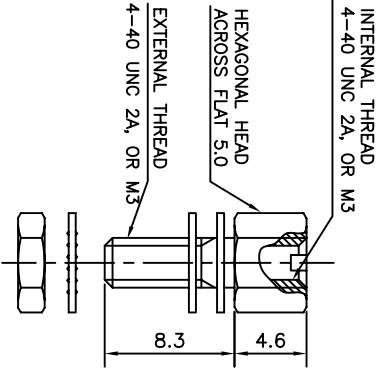

MATERIAL
FEMALE SCREW: BRASS
NUT: STEEL
WASHERS: STEEL

8630-01LF	ASSEMBLED FEMALE SCREW LOCK WITH M3 INT & EXT THREAD
8630-01ALF	ASSEMBLED FEMALE SCREW LOCK WITH M3 EXT & UNC INT THREAD
8630-01BLF	ASSEMBLED FEMALE SCREW LOCK WITH UNC INT & EXT THREAD
8630-01CLF	ASSEMBLED FEMALE SCREW LOCK WITH UNC EXT & M3 INT THREAD
PART NO:	DESCRIPTION

GENERAL NOTE:

PLATING
FOR NON LF : ZINC HEXAVALENT CHROMATE
FOR LF : ZINC TRIVALENT CHROMATE

LF PART NOS FOR ROHS PRODUCTS
This LF product meets European Union Directives and other country regulations as described in GS-22-008
Packaging as per GS-14-920

mat'l. code		surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection	product family	D-SUB
ltr	ecn no	dr	date	tolerances unless otherwise specified	on/eng	title
B	106-0074	MINI	2009/09/09			MALE AND FEMALE SCREW LOCK
C	106-0191	ANG	2009/09/16			
D	106-0292	ANG	2009/12/29	0°±1°		
E	111-0022	ANG	2011/01/26	chr	MINI K VANDANTH	
F	125-01106	PK	2012/05/23	len/gr	George V Joseph	
				chr	Abhilash M/R	dwg no C-DSUB-0124
				oppd	Sudhir Varma	
sheet	revision	F				sheet 1 of 1
index	sheet	1				size A4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI:

[863015NLF](#) [863005LF](#) [863008LF](#)