
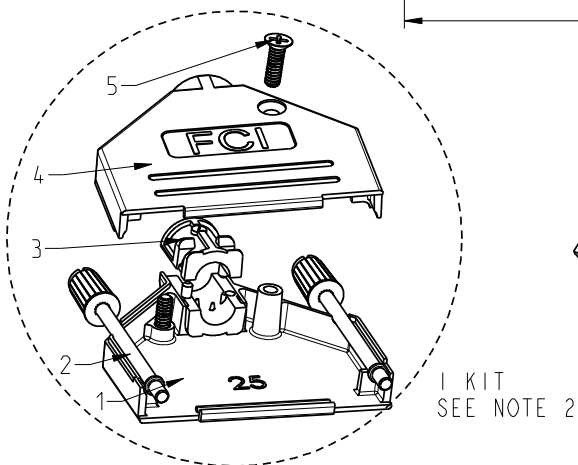


SIZE	Part Num.	Threading	Headscrew	Packaging
25	8655MH2501BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH2501BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH2502BLF	M3	Grey	BULK
	8655MH2502BKLF	M3	Grey	KIT

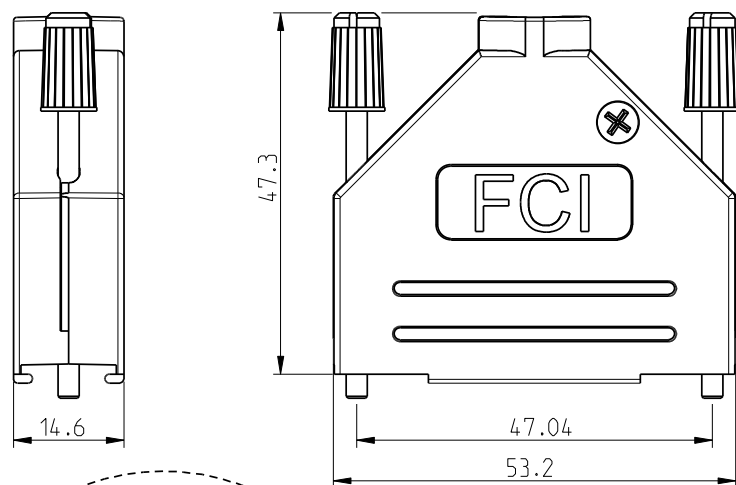

DESIGNATION	REP.	09	15	25	37
COVER BOTTOM	1		1		
JACKSCREW	2		2		
STRAIN RELIEF	3		2		
COVER TOP	4		1		
SCREW POZIDRIVE	5		2		

rev	ecn no	dr	date
1	-	LGO	2008/01/31
2	-	LGO	2008/02/06
A	LS08-0054	LGO	2008/04/08
B	F09-0048	LSA	2009/05/20
C	F10-0093	APA	2010/08/31
D	F11-0073	APA	2011/07/20
-	-	-	-

NOTES:

Material and finish: Zinc die-cast
Nickel plated

Cable strain relief: Polycarbonate (UL94V-0)

Jackscrews:

- Headscrew : plastic, color according threading
- Body : metal, threading according tables

Temperature range: -40°C to 120°C
Cable diameter: 4.0 to 12.0mm
Attenuation factor: >40 dB between 30MHz and 1 GHz
Marking FCI logo: Height 6 mm for all versions

Covers screwing force (max): 100 Ncm
Jackscrew screwing force (max): 75 Ncm

Packaging notes (see tables):

- 1 - Bulk : Every spare part packaged per 100 or 200 into plastic bag.5 plastic bags per carton box.
1 plastic bag per part.
- 2 - Kit : 1 set of spare parts necessary to realise 1 kit into a plastic bag.
100 plastic bags per carton box.





NOTE:RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.



www.fciconnect.com			surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
			TOLERANCES UNLESS OTHERWISE SPECIFIED		
Dr	GOISNARD.L	2008/01/31	ANGULAR	0.X	±/
Eng	PESSON.M	2008/01/31	LINEAR	0.XX	±/
Chr	LEGARE.P	2008/01/31	0° ±/°	0.XXX	±/
Appr	LEGARE.P	2008/01/31	Product family		ECN F11-0073
			Spec ref		
			size A3		Scale 3:2
			D-SUB METAL HOODS		ECN F11-0073
			STRAIGHT		Spec ref
			catalog no		10085962C
			CUSTOMER		sheet 1 of 3

SIZE	Part Num.	Threading	Headscrew	Packaging
09	8655MH0901BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH0901BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH0902BLF	M3	Grey	BULK
	8655MH0902BKLF	M3	Grey	KIT

SIZE	Part Num.	Threading	Headscrew	Packaging
15	8655MH1501BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH1501BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH1502BLF	M3	Grey	BULK
	8655MH1502BKLF	M3	Grey	KIT

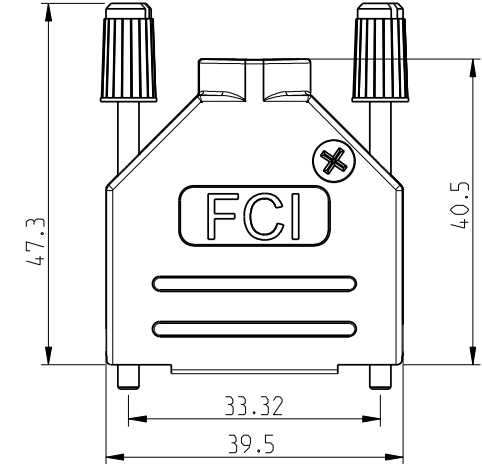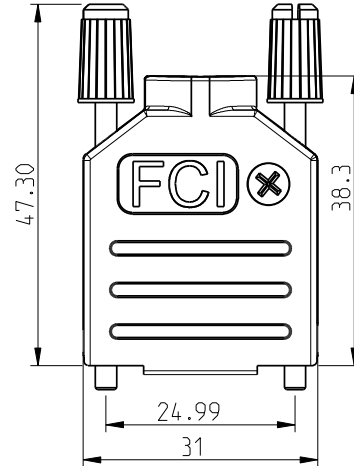

SIZE	Part Num.	Threading	Headscrew	Packaging
37	8655MH3701BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH3701BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH3702BLF	M3	Grey	BULK
	8655MH3702BKLF	M3	Grey	KIT

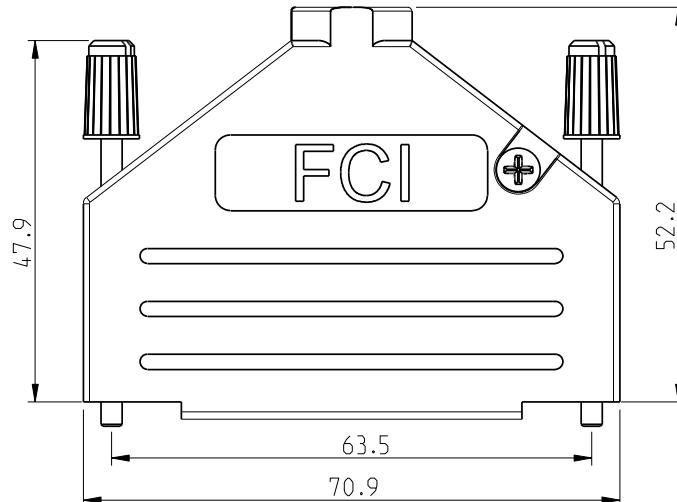


www.fciconnect.com			surface ISO 1302		✓	tolerance std ISO 406 ISO 1101		projection 		mm 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	GOISNARD.L	2008/01/31	ANGULAR	LINEAR	0.X		±/		size A3	Scale 3:2	
Eng	PESSON.M	2008/01/31			0.XX		±/				
Chr	LEGARE.P	2008/01/31	0° ±/°		0.XXX		±/		ECN FII-0073		
Appr	LEGARE.P	2008/01/31	Product family D-Sub						Spec ref		
	title D-SUB METAL HOODS STRAIGHT					dwg no	10085962C				Rev. D
	catalog no					CUSTOMER		sheet 2 of 3			


REV C - 2006-03-28

CABLING INSTRUCTIONS FOR CABLE Ø 4, 5, 7 or 9 mm


- 1- Use two halves of strain relief, different sizes can be mixed (Ø4,5,7 or 9)

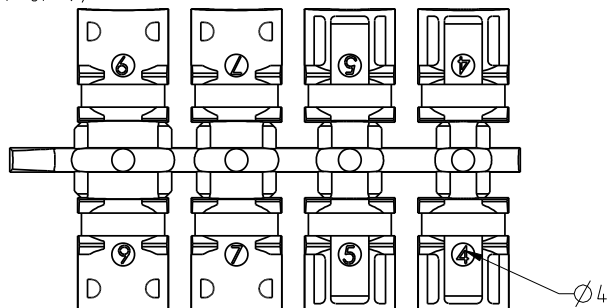


- 2- Strip cable 18mm and shape to two pigtails

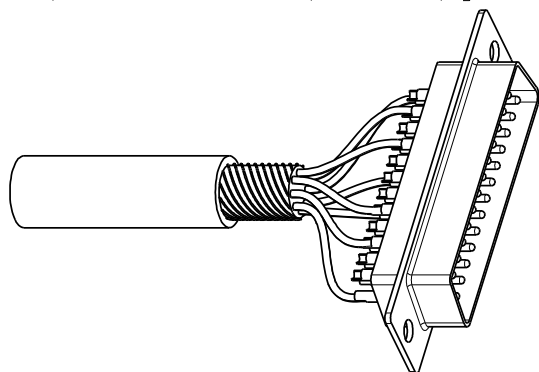


- 3- Attach the strain relief around the cable

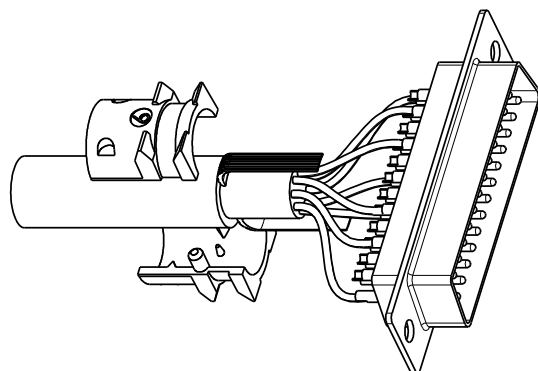


- 4- Bend cable shielding back on outside of strain relief

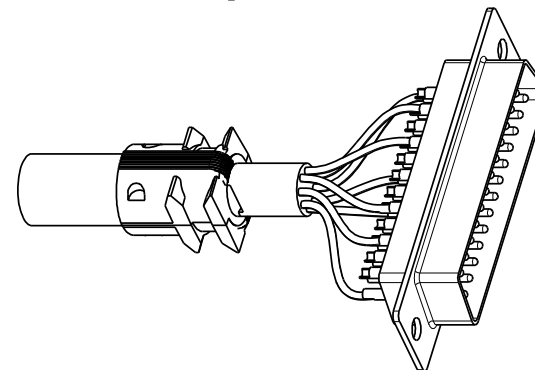

- 5- Mount connector and cable into the backshell

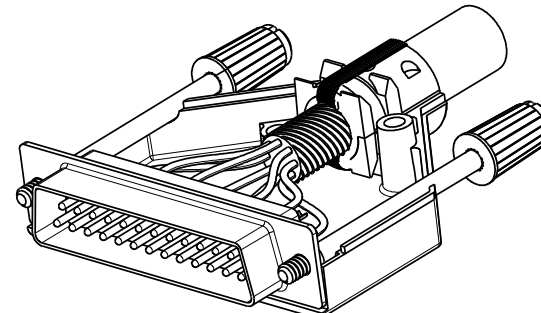

- 6- Assemble the other half screwing force: 100 Ncm

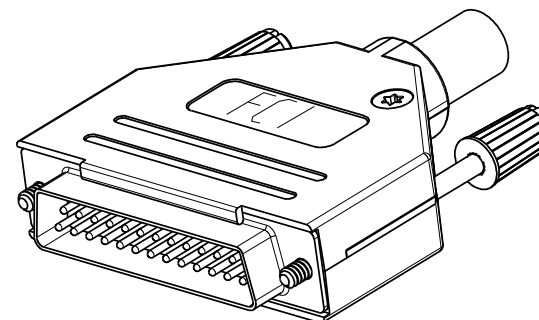

CABLING INSTRUCTIONS FOR CABLE Ø > 9 to 11 mm

- 1- Use one half of strain relief, (Ø9).



Copyright FCI.

www.fciconnect.com			surface ISO 1302		✓	tolerance std ISO 406 ISO 1101		projection 		mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED											
Dr	GOISNARD.L	2008/01/31	ANGULAR	LINEAR	0.X		±/	size	Scale		
Eng	PESSON.M	2008/01/31			0.XX		±/	A3	3:2		
Chr	LEGARE.P	2008/01/31	0°	±/°	0.XXX		±/	ECN	FIL-0073		
Appr	LEGARE.P	2008/01/31	Product family D-Sub					Spec ref			
			title D-SUB METAL HOODS					dwg no 10085962C		Rev D	
			STRAIGHT					CUSTOMER		sheet 3 of 3	
			catalog no								

REV C - 2006-03-28

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI:

[8655MH3701BLF](#) [8655MH0901BLF](#) [8655MH1501BLF](#) [8655MH2501BLF](#) [8655MH0901BKLF](#) [8655MH2501BKLF](#)
[8655MH1501BKLF](#) [8655MH3702BKLF](#) [8655MH3701BKLF](#) [8655MH1502BKLF](#) [8655MH0902BKLF](#)
[8655MH2502BKLF](#)