

SIZE	Part Num.	Threading	Headscrew
25	8655PHRA2501LF	UNC 4.40	Black
	8655PHRA2502LF	M3	Grey

NOTES:

Material: Polycarbonat (UL94V-0)

Cable strain relief: Polycarbonat (UL94V-0)

Temperature range: -40°C to 120°C

Cable diameter: 4,0 to 13,0 mm

Jackscrew:

- Headscrew : plastic, colour according threading
- Body : Metal, threading according tables

Packaging: Bulk, in box of 100 P/N


Covers screwing force (max): 100 Ncm

Jackscrew screwing force (max): 50 Ncm



NOTE:RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

DESIGNATION	REP	09	15	25	37
COVER BOTTOM	1	1			
JACKSCREWS	2	1	2		
STRAIN RELIEF	3	2			
COVER TOP	4	1			
SCREWS POZIDRIVE	5	2			

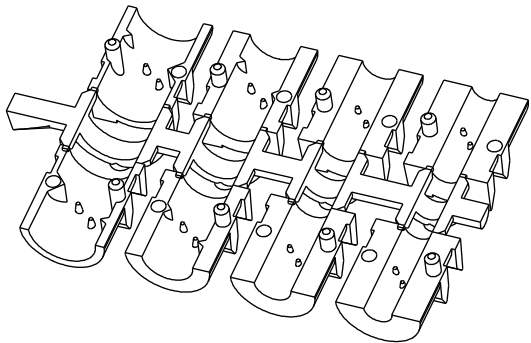


SCALE 1:1

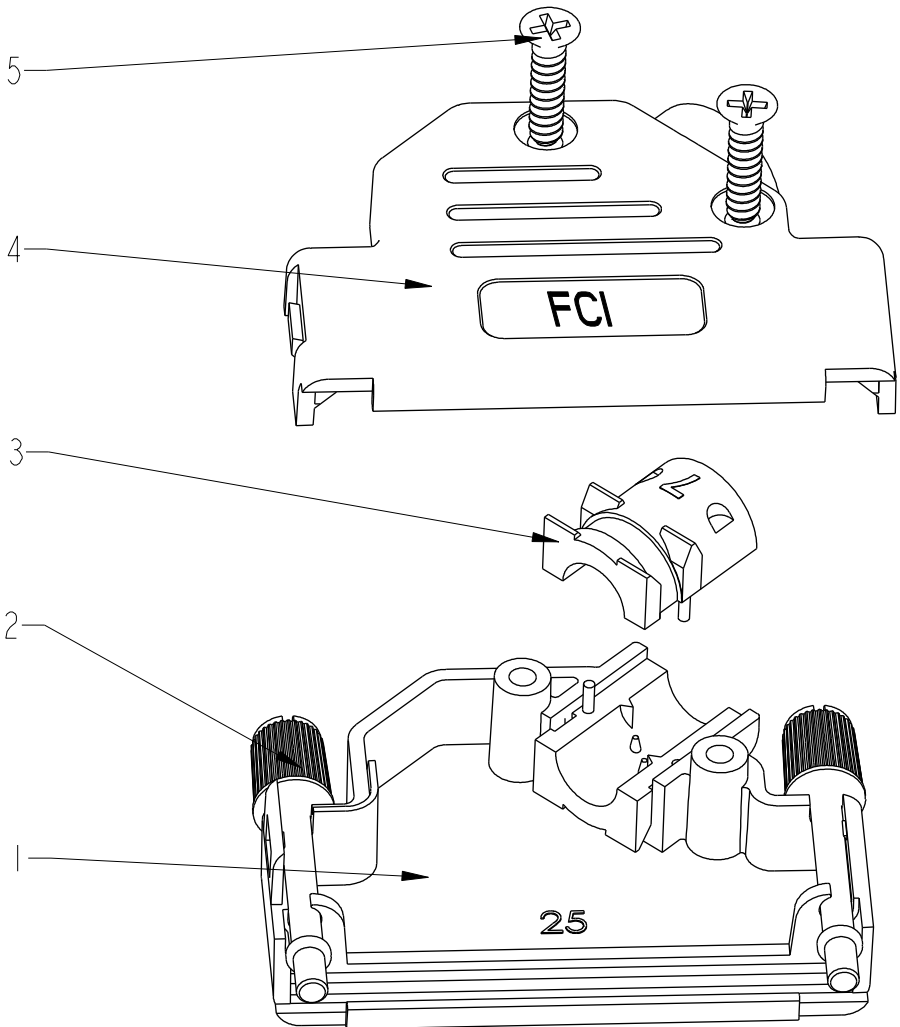
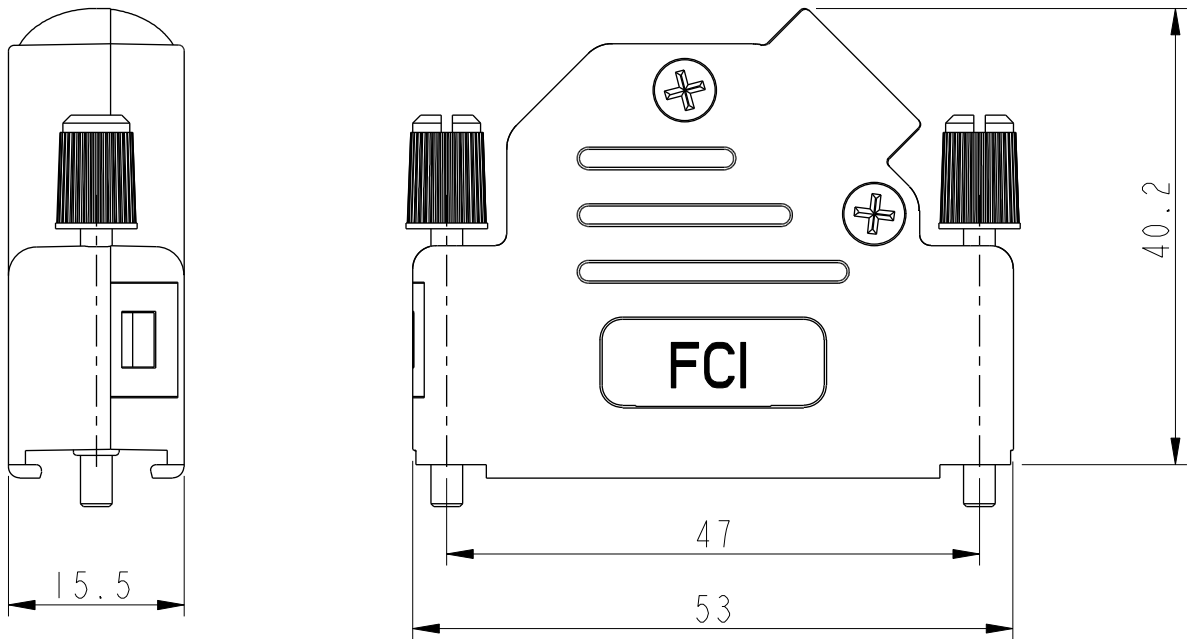


spec ref	-	dr	A Parrenin	2011/04/15	projection	mm	size	A3	scale	3:2
tolerance std	ISO 406 ISO 1101	eng	J Dalibard	2015/06/22	chr	J Dalibard	2015/06/23	ecn no	ELX-B-21206-1	
surface	✓	appr	Aymeric Soudy	2015/06/23	product family	D-SUB	rel level	Released		
linear	0.X 0.XX 0.XXX	± ± ±	FCI	ANGLED	dwg no	10061513C	rev	H		
angular	0°	±°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 1 of 3			


SIZE	Part Num.	Threading	Headscrew
9	8655PHRA0901LF	UNC 4.40	Black
	8655PHRA0902LF	M3	Grey

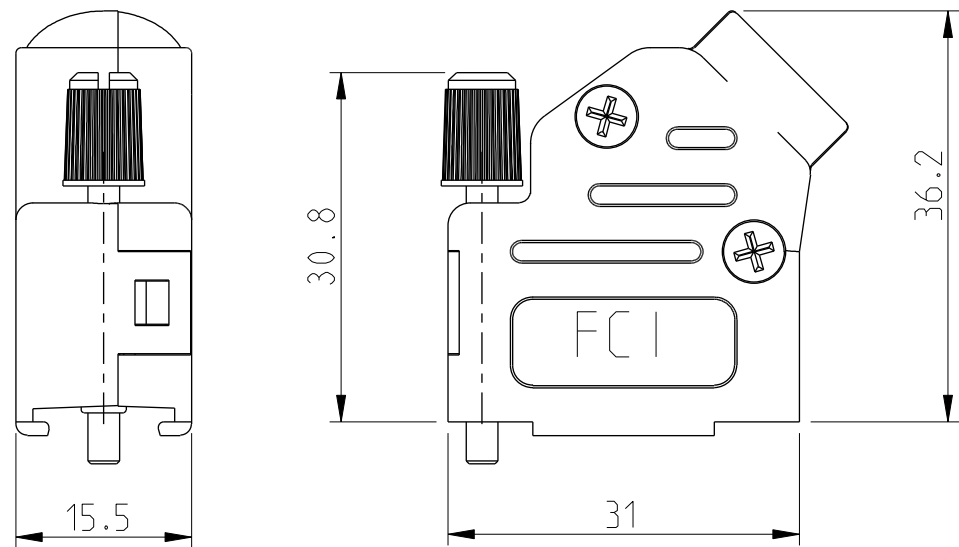

SIZE	Part Num.	Threading	Headscrew
15	8655PHRA1501LF	UNC 4.40	Black
	8655PHRA1502LF	M3	Grey

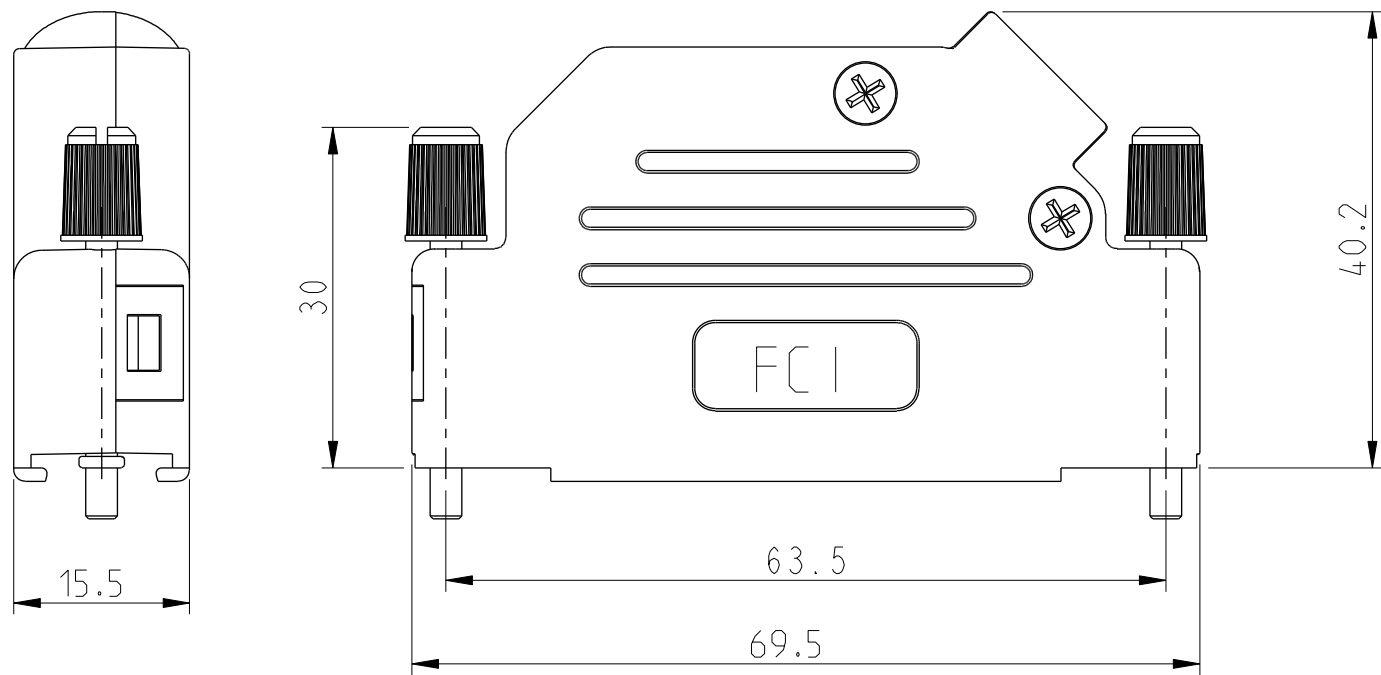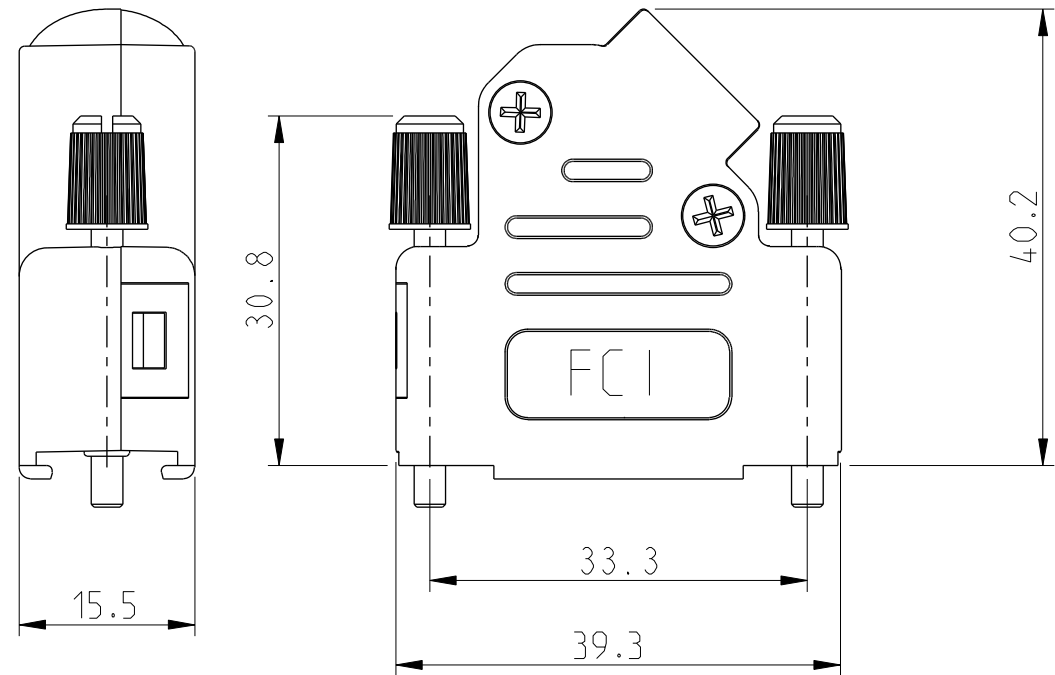


SIZE	Part Num.	Threading	Headscrew
37	8655PHRA3701LF	UNC 4.40	Black
	8655PHRA3702LF	M3	Grey


spec ref		-		dr	A Parrenin	2011/04/15	projection		mm		size	A3	scale	3:2			
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	J Dalibard	2015/06/22					ecn no	ELX-B-21206-1					
				chr	J Dalibard	2015/06/23											
ISO 406				appr	Aymeric Soudy	2015/06/23	product family			rel level			Released				
ISO 1101																	
surface		linear	0.X	±		title			D-SUB PLASTIC SHELLS			dwg no	10061513C		rev		
			0.XX	±													
			0.XXX	±													
ISO 1302				angular	0°	±°	www.fci.com			cat. no.			Product - Customer Drw			sheet 2 of 3	

CABLING INSTRUCTIONS


1- Use two halves of strain relief different sizes can be mixed (Ø 4,5,7 or 9)

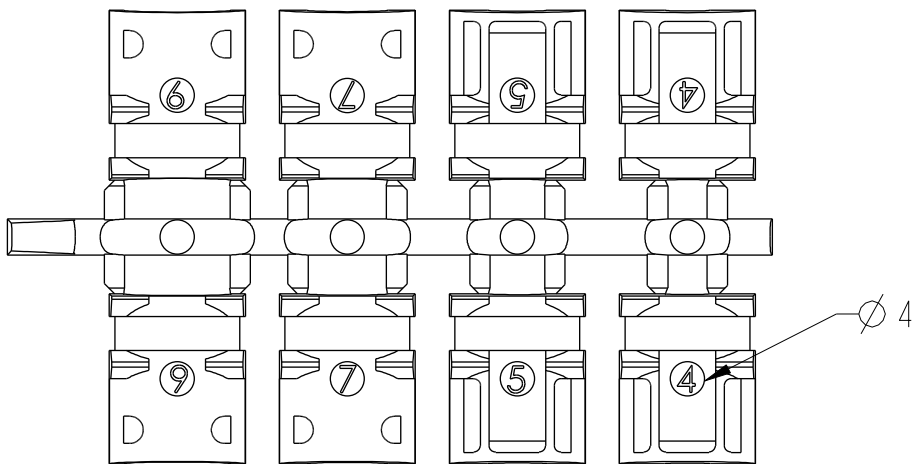


3- Mount connector and cable into the backshell

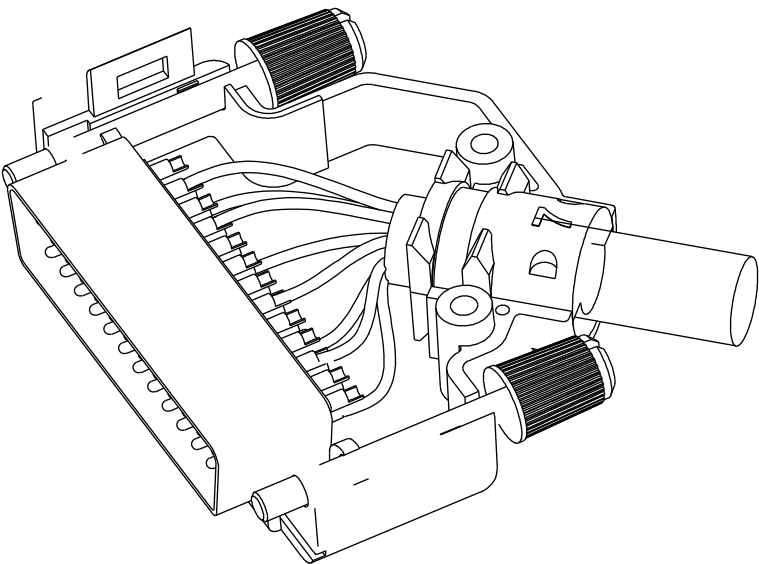


2- Attach the strain relief around the cable

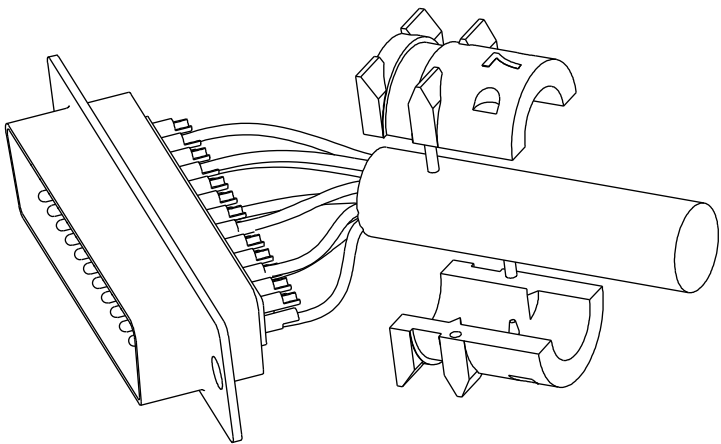

4- Assemble the other half screwing force: 100 Ncm

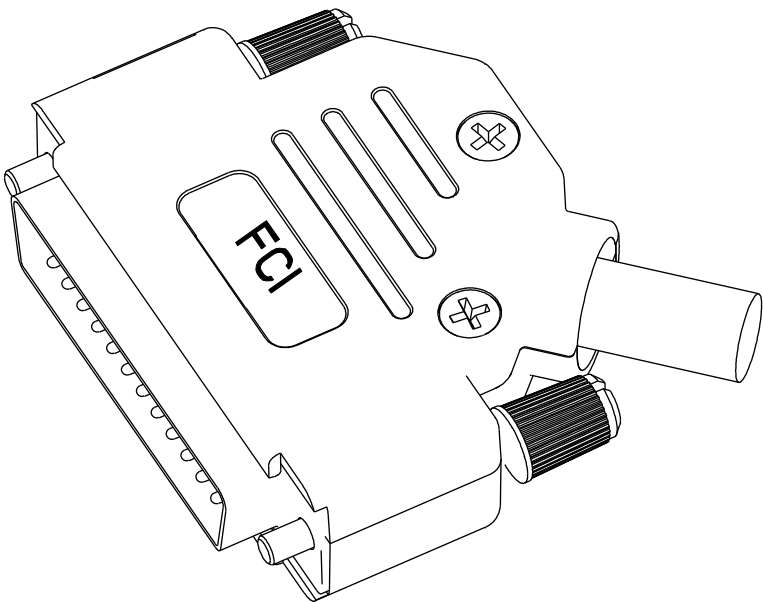

spec ref		-		dr		A Parrenin	2011/04/15		projection		mm		size		A3	scale		3:2						
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED			eng		J Dalibard	2015/06/22						ecn no		ELX-B-21206-1								
ISO 406					chr		J Dalibard	2015/06/23																
ISO 1101					appr		Aymeric Soudy		2015/06/23					product family		rel level		Released						
surface 		linear		0.X		±				title		D-SUB PLASTIC SHELLS		dwg no		10061513C		rev		H				
																					0.XX		±	
																					0.XXX		±	
ISO 1302		angular		0°		±°		www.fci.com		cat. no.		Product - Customer Drw		sheet 3 of 3										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[8655PHRA0901LF](#) [8655PHRA2501LF](#)