


REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	LY

ELECTRICAL CHARACTERISTICS:

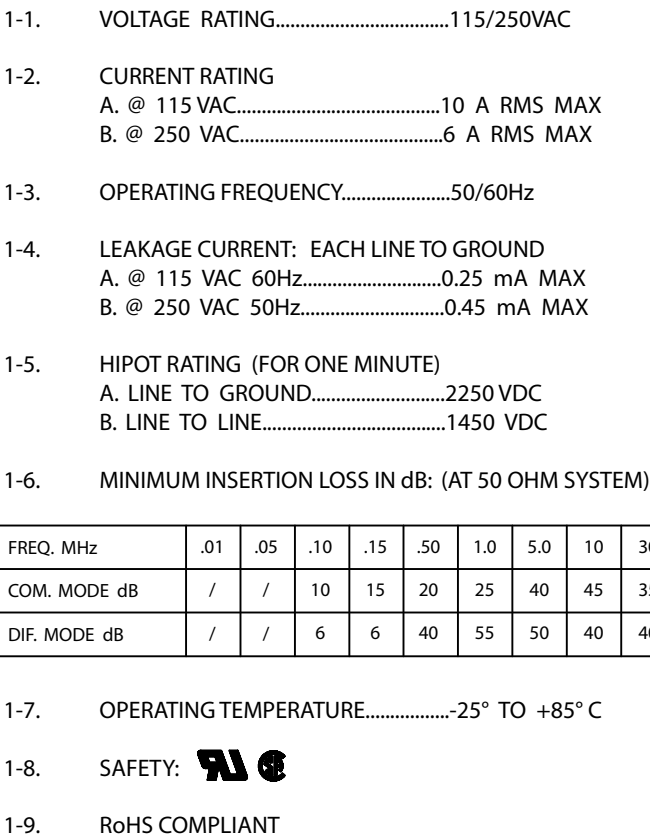

The diagram shows a parallel LC circuit. On the left, there are two input terminals labeled 'L' and 'N'. Each terminal has a fuse (F) in series. These two lines pass through a switch (SW) and then connect to a parallel combination of a capacitor (C1) and an inductor (L). The other end of the inductor (L) is connected to a ground symbol. Below the main circuit, there is a separate branch consisting of an inductor (Lg) connected to a ground symbol. To the right of the main circuit, there is a vertical stack of labels: 'L', 'C', 'A', 'D', and 'O'.

L: 1.0mH
Lg: 0.12mH
C1: 0.33uF
C2: 3300pF
R: 470kΩ

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number:	866-10/014	RoHS Compliant
0-1	0.15	Description: EMI FILTER		
1-6	0.20			
6-18	0.30		UNIT: mm	REV. B
18-50	0.50			
50-120	0.70			
120-250	0.90	Drawn / Date	Checked / Date	Approved / Date
250-500	1.20	B.ZHANG 12-12-02	12-12-02	JJH / 12-12-02