

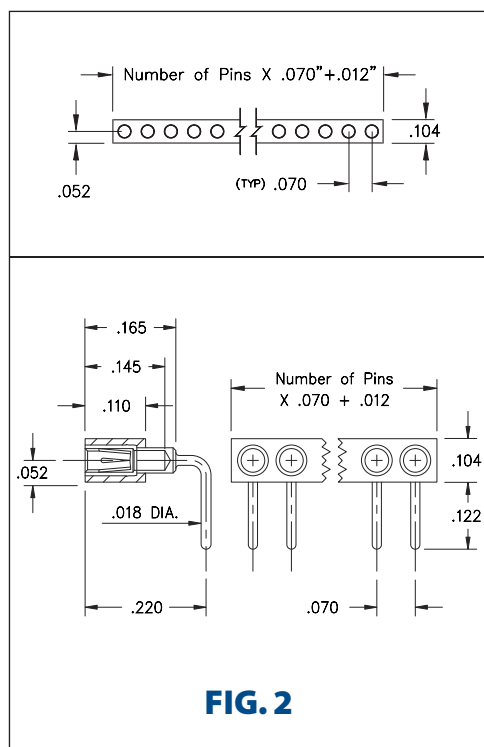


INTERCONNECTS

SERIES 870 & 871 • .070" GRID (.018" DIA.) PINS, RIGHT ANGLE HEADERS & SOCKETS • SINGLE ROW STRIPS

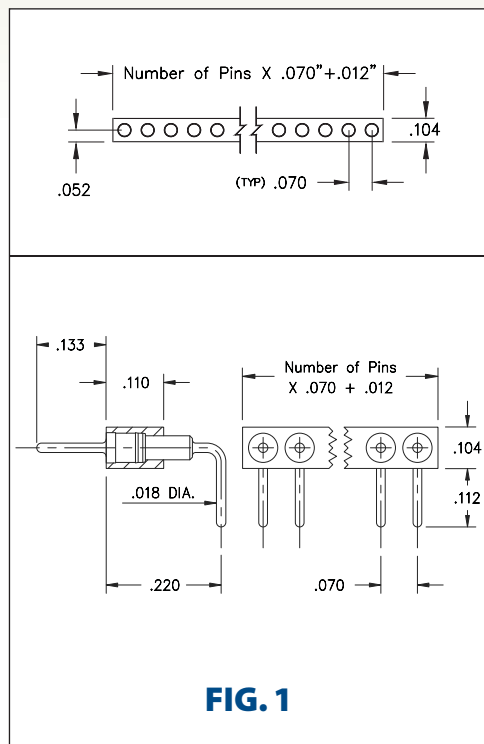

- Series 870 and 871 Interconnects feature space saving .070" pitch
- Series 870 uses MM #3790-0 pins. See page 209 for details
- Series 871 uses MM #1805 receptacles and accept pin diameters from .015" - .025". See page 169 for details
- Receptacles use Hi-Rel, 4-finger BeCu #30 contact rated at 3 amps. See page 253 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations

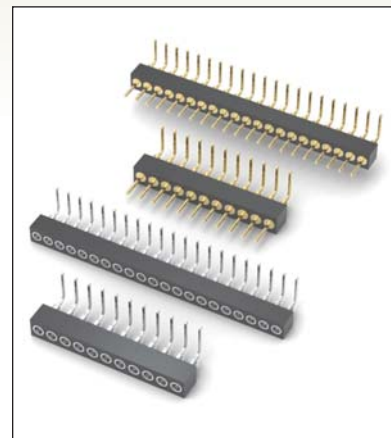

ORDERING INFORMATION

FIG. 1	Series 870...20-001	Right Angle Pin Header			
	870-10-0-20-001000 Specify number of pins 02-21				
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Enviromental Data, See page 264					
SPECIFY PLATING CODE XX=		10 ◆			
Pin Plating 		10 μ" Au			

FIG. 2	Series 871...20-001	Right Angle Socket			
	871-XX-0-20-001000 Specify number of pins 02-21				
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Enviromental Data, See page 264					
SPECIFY PLATING CODE XX=					41 ◆ 43 ◆
Sleeve (Pin) 					200 μ" Sn 200 μ" Sn
Contact (Clip) 					10 μ" Au 30 μ" Au

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[870-10-021-20-001000](#) [871-43-021-20-001000](#)