


Datasheet

Feed Through Terminal Block

RS Stock number 872-4808

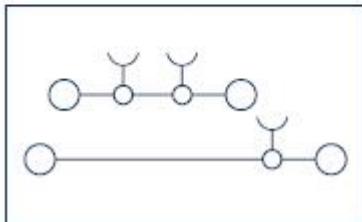

Feed-through terminal
2x2 connections

Specifications:

Rated wire cross-section, mm² | AWG: 16 | 18-6

Rated impulse voltage, kV | Contamination degree: 8 | 3

Plug gauge acc. to EN 60 947-1 | Flamm. class acc. to UL 94: B7 | VO

Connection data

Single wire (solid) | stranded (flexible), mm²: 0.2-16 | 0.2-16

Finely-stranded | finely-stranded: 0.2-16 | 0.2-10

(w/ferrules acc. to DIN 46 228/1), mm²

Contact wire range, mm²: 0.6-16

Stripping length, mm: 10

Torque, Nm | Screw: 2.0-4.0 | Slotted M 4

Features

- Foot can be snapped on TS35 DIN rail
- Housing made from polyamide 6.6 UL 94-V0