




- ① POINT OF MEASUREMENT FOR PLATING THICKNESS
2. TRUE POSITION TOLERANCE OF POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- ③ 0.00076[.000030] GOLD ON CONTACT AREA, GOLD FLASH ON SOLDER AREA, ALL OVER 0.00127[.000050] NICKEL
- ④ MATERIAL:
HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK.
POSTS: PHOS BRONZE.

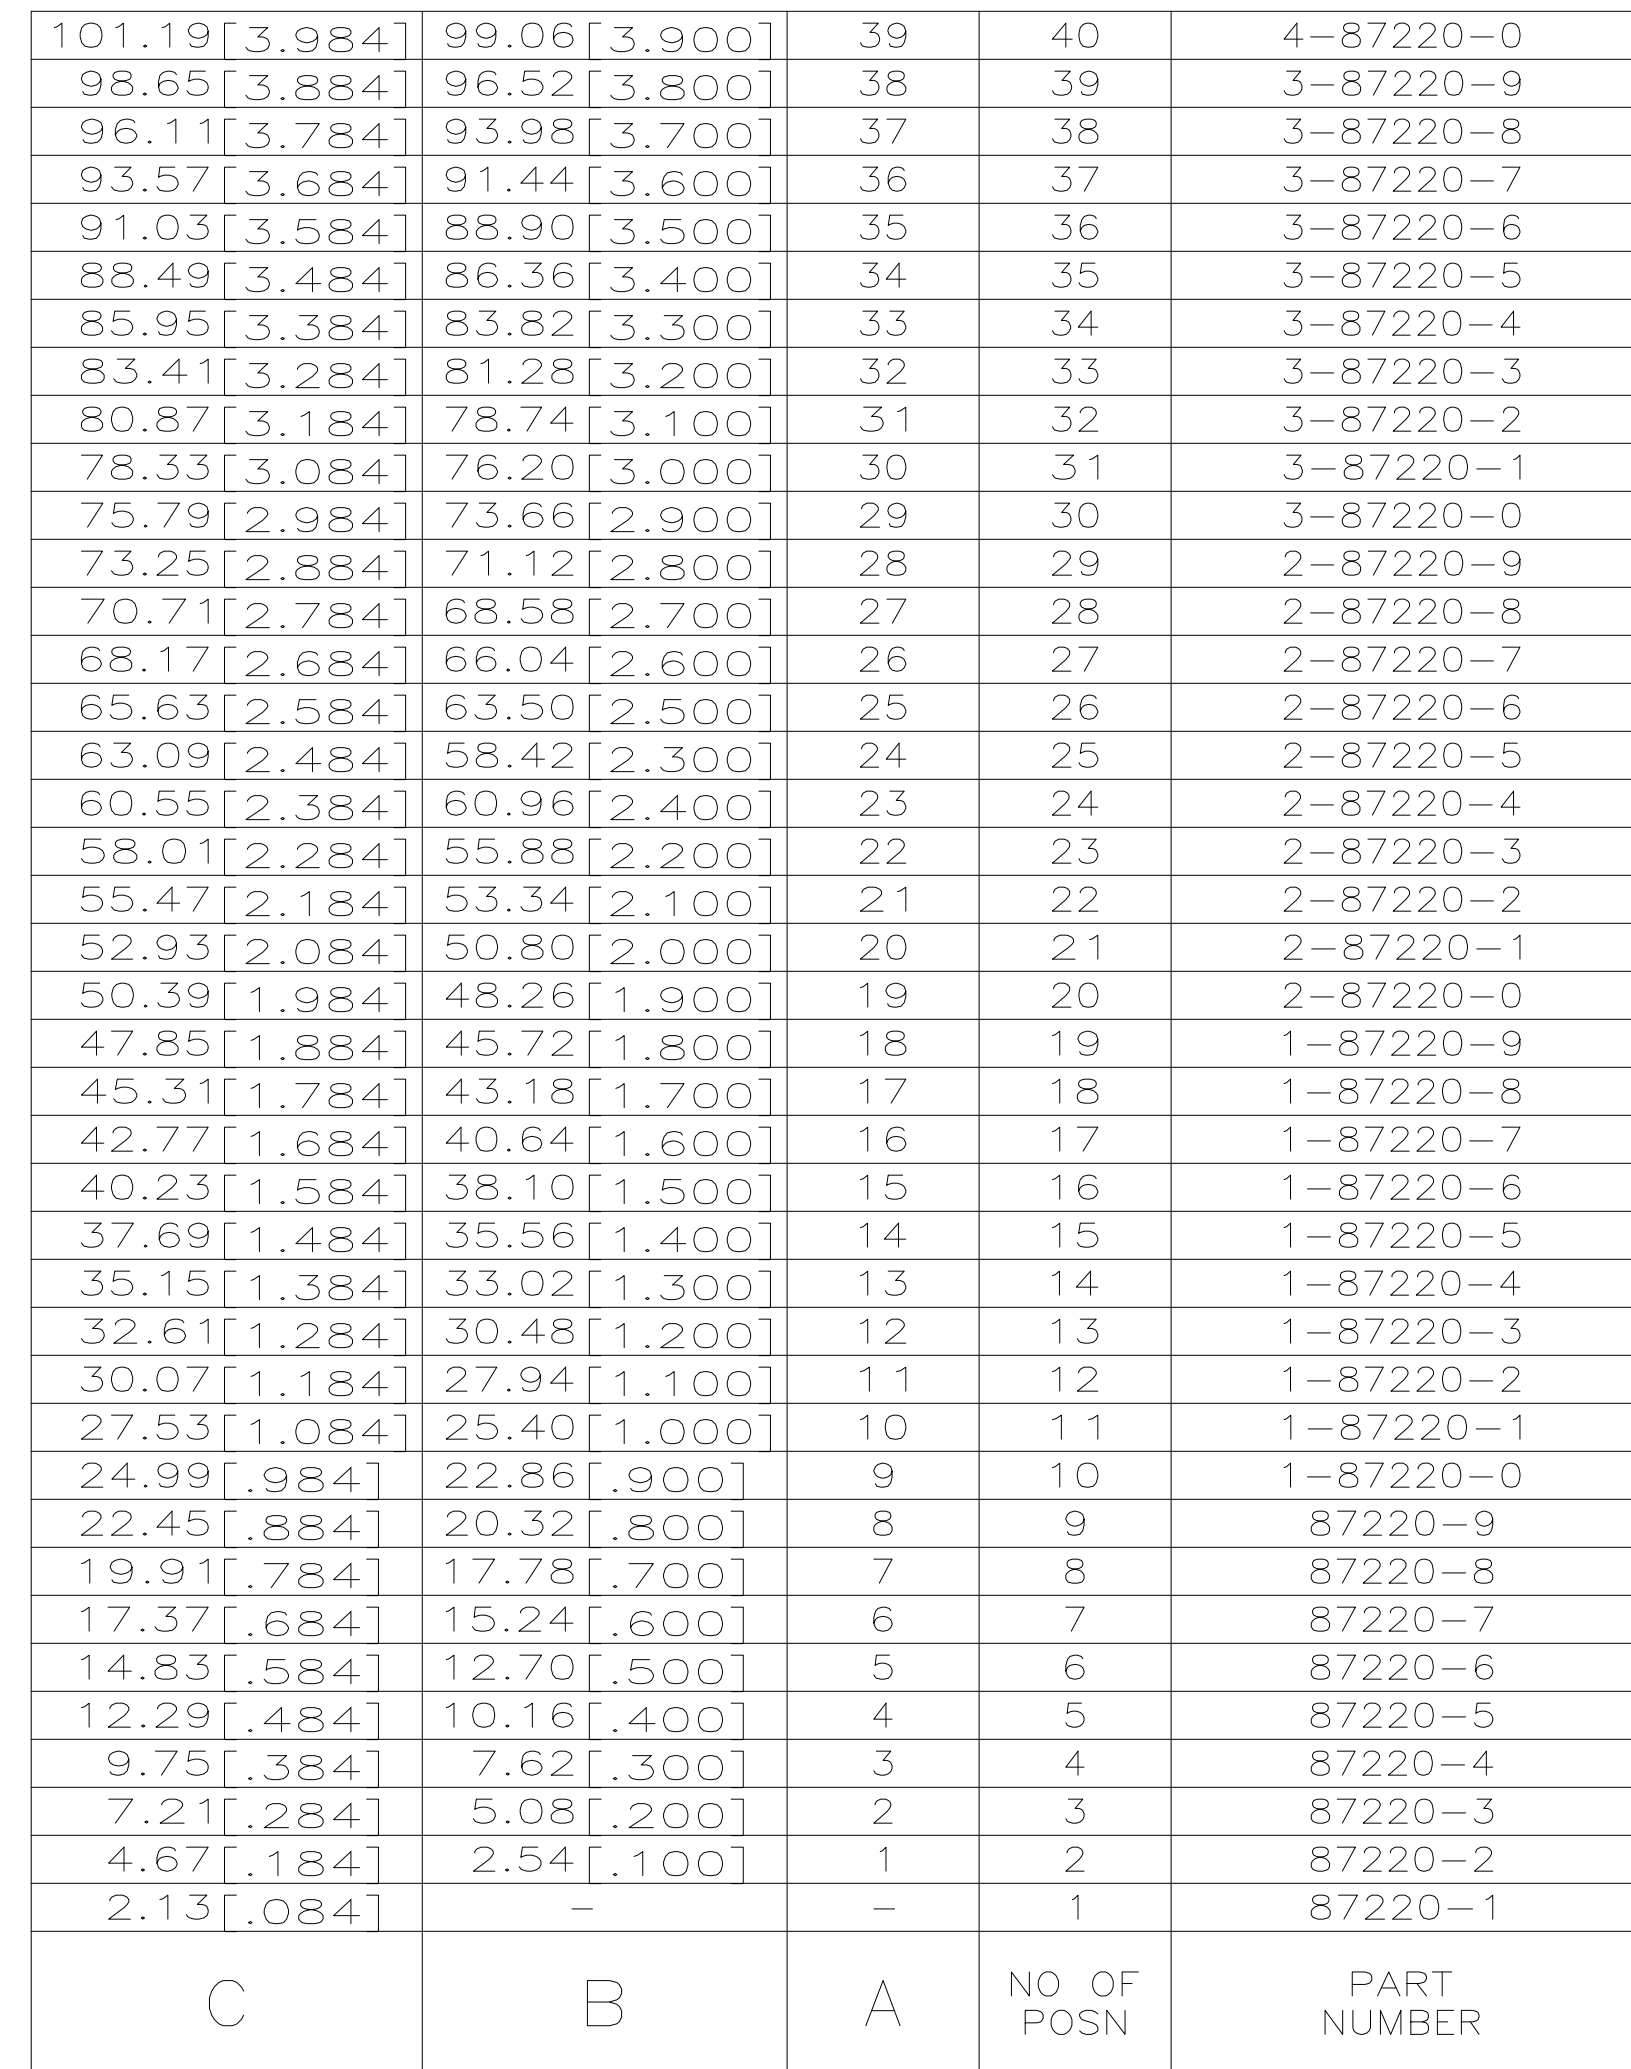

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E. BRANDBERG				TE Connectivity	
		CHK S. SHUEY					
		APVD S. SHUEY		NAME			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		ASSEMBLY, MOD II, HEADER, SINGLE ROW, 2.54[.100]C/L VERTICAL, 0.64[0.025] SQ POSTS			
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± ± -		PRODUCT SPEC - APPLICATION SPEC -			
MATERIAL 		FINISH POSTS: 		SIZE A2		CAGE CODE 00779	DRAWING NO C-87220
		WEIGHT -		RESTRICTED TO -			
CUSTOMER DRAWING						SCALE 4:1	SHEET 1 of 1
						REV K3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[87220-3](#)