



| LOC | DIST | REVISIONS |     |                                             |           |     |
|-----|------|-----------|-----|---------------------------------------------|-----------|-----|
| AD  | 39   | P         | LTR | DESCRIPTION                                 | DATE      | DWN |
|     |      | L3        |     | PART STATUS UPDATED IN THE PARTS LIST TABLE | 27AUG2015 | KJK |

D

C


B

A

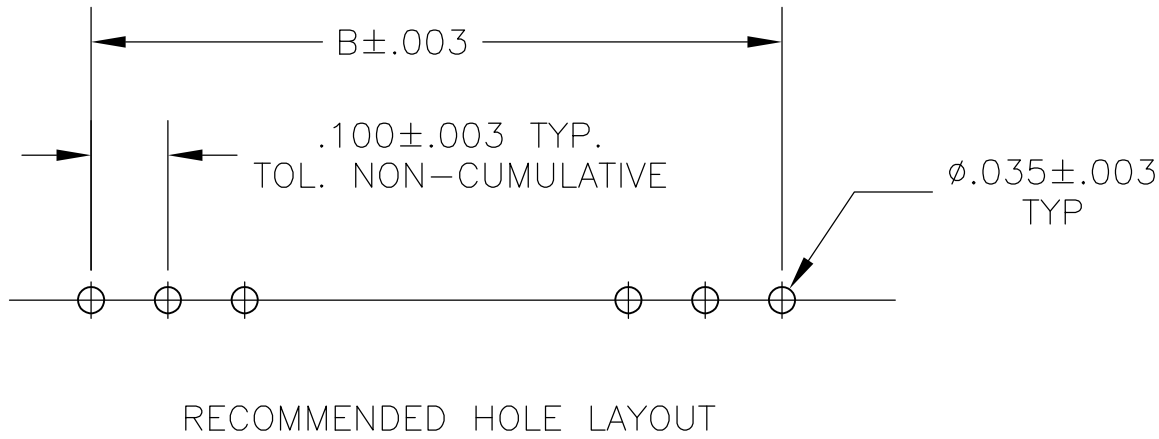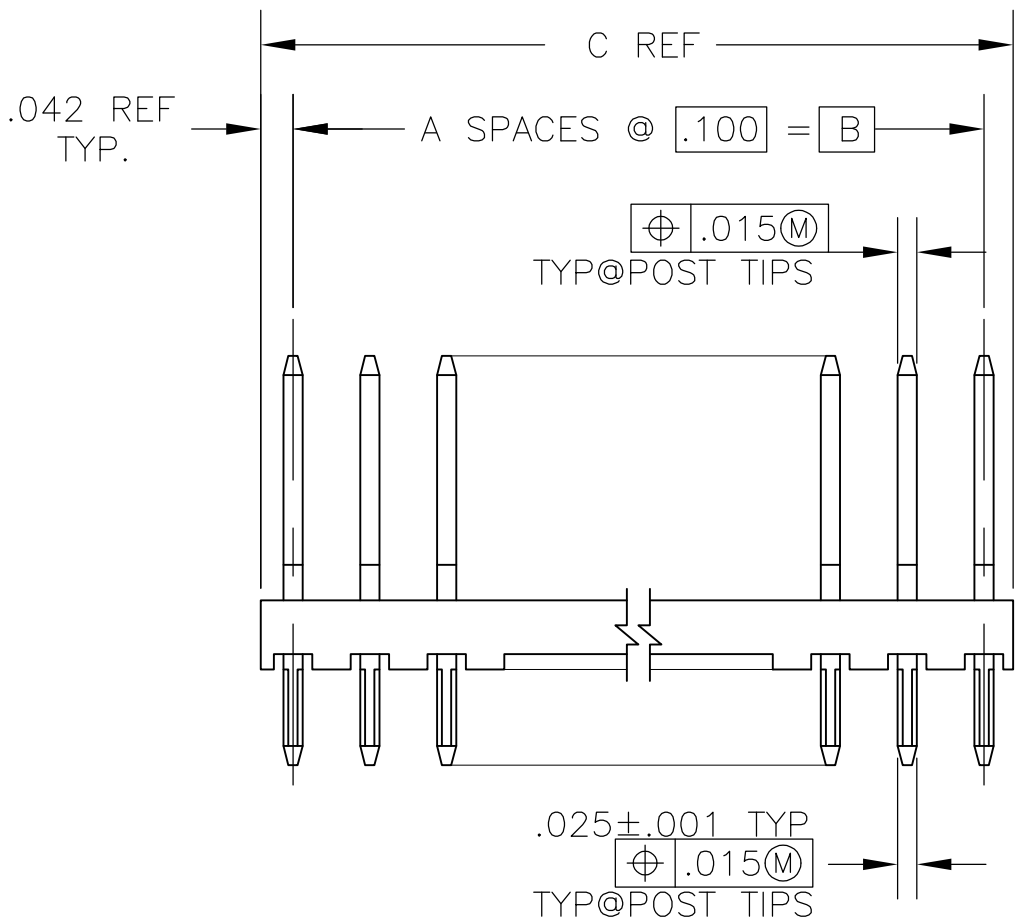

NOTES:

- TRUE POSITION TOLERANCE OF POST TIPS APPLIES WHEN HEADERS ARE HELD FLAT AGAINST PC BOARD.
- .000015 GOLD IN CONTACT AREA, GOLD FLASH ON SOLDER AREA, ALL OVER .000050 NICKEL.
- POINT OF MEASUREMENT FOR PLATING THICKNESS.
- PARTS PACKAGED IN SINGLE TUBES.
- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK  
POST: PHOS.BRONZE.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

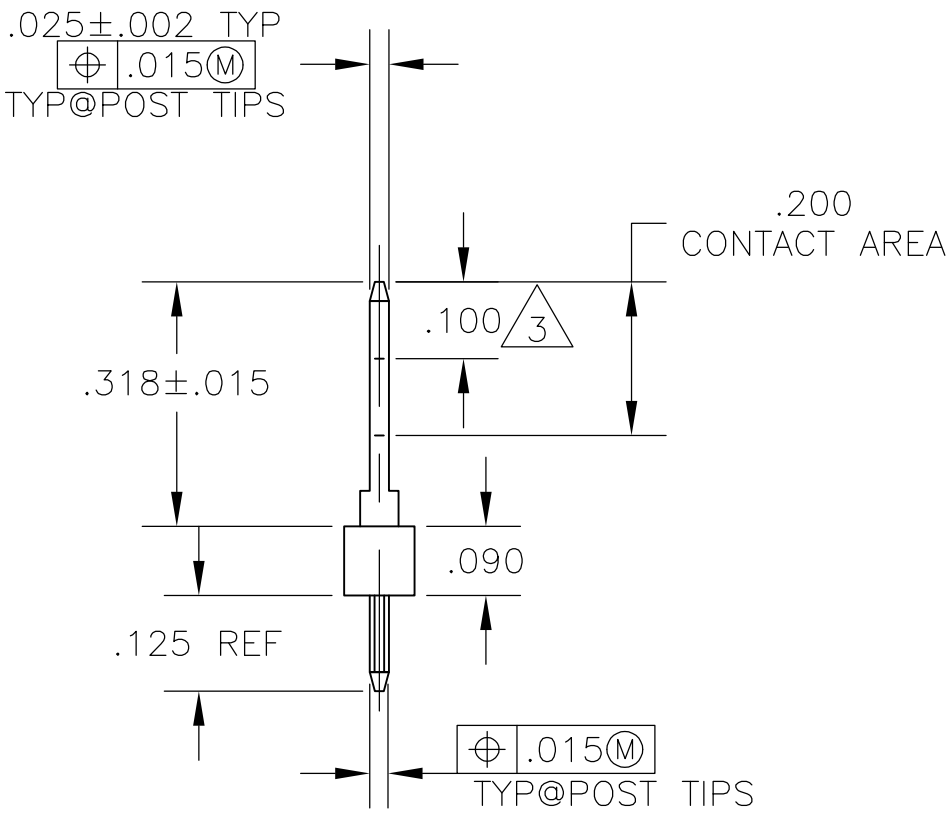

| 6 | 4 | OBSOLETE | .284  | .200  | 2  | 3         | 4-87224-3 |
|---|---|----------|-------|-------|----|-----------|-----------|
|   |   |          | 3.984 | 3.900 | 39 | 40        | 4-87224-0 |
|   |   |          | 3.884 | 3.800 | 38 | 39        | 3-87224-9 |
|   |   |          | 3.784 | 3.700 | 37 | 38        | 3-87224-8 |
|   |   |          | 3.684 | 3.600 | 36 | 37        | 3-87224-7 |
|   |   |          | 3.584 | 3.500 | 35 | 36        | 3-87224-6 |
|   |   |          | 3.484 | 3.400 | 34 | 35        | 3-87224-5 |
|   |   |          | 3.384 | 3.300 | 33 | 34        | 3-87224-4 |
|   |   |          | 3.284 | 3.200 | 32 | 33        | 3-87224-3 |
|   |   |          | 3.184 | 3.100 | 31 | 32        | 3-87224-2 |
|   |   |          | 3.084 | 3.000 | 30 | 31        | 3-87224-1 |
|   |   |          | 2.984 | 2.900 | 29 | 30        | 3-87224-0 |
|   |   |          | 2.884 | 2.800 | 28 | 29        | 2-87224-9 |
|   |   |          | 2.784 | 2.700 | 27 | 28        | 2-87224-8 |
|   |   |          | 2.684 | 2.600 | 26 | 27        | 2-87224-7 |
|   |   |          | 2.584 | 2.500 | 25 | 26        | 2-87224-6 |
|   |   |          | 2.484 | 2.400 | 24 | 25        | 2-87224-5 |
|   |   |          | 2.384 | 2.300 | 23 | 24        | 2-87224-4 |
|   |   |          | 2.284 | 2.200 | 22 | 23        | 2-87224-3 |
|   |   |          | 2.184 | 2.100 | 21 | 22        | 2-87224-2 |
|   |   |          | 2.084 | 2.000 | 20 | 21        | 2-87224-1 |
|   |   |          | 1.984 | 1.900 | 19 | 20        | 2-87224-0 |
|   |   |          | 1.884 | 1.800 | 18 | 19        | 1-87224-9 |
|   |   |          | 1.784 | 1.700 | 17 | 18        | 1-87224-8 |
|   |   |          | 1.684 | 1.600 | 16 | 17        | 1-87224-7 |
|   |   |          | 1.584 | 1.500 | 15 | 16        | 1-87224-6 |
|   |   |          | 1.484 | 1.400 | 14 | 15        | 1-87224-5 |
|   |   |          | 1.384 | 1.300 | 13 | 14        | 1-87224-4 |
|   |   |          | 1.284 | 1.200 | 12 | 13        | 1-87224-3 |
|   |   |          | 1.184 | 1.100 | 11 | 12        | 1-87224-2 |
|   |   |          | 1.084 | 1.000 | 10 | 11        | 1-87224-1 |
|   |   |          | .984  | .900  | 9  | 10        | 1-87224-0 |
|   |   |          | .884  | .800  | 8  | 9         | 87224-9   |
|   |   |          | .784  | .700  | 7  | 8         | 87224-8   |
|   |   |          | .684  | .600  | 6  | 7         | 87224-7   |
|   |   |          | .584  | .500  | 5  | 6         | 87224-6   |
|   |   |          | .484  | .400  | 4  | 5         | 87224-5   |
|   |   |          | .384  | .300  | 3  | 4         | 87224-4   |
|   |   |          | .284  | .200  | 2  | 3         | 87224-3   |
|   |   |          | .184  | .100  | 1  | 2         | 87224-2   |
|   |   |          | .084  | -     | -  | 1         | 87224-1   |
|   |   |          | C     | B     | A  | NO OF POS | PART NO   |

|                                        |  |                              |                                                                              |  |           |              |               |
|----------------------------------------|--|------------------------------|------------------------------------------------------------------------------|--|-----------|--------------|---------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  | DWN RAGHAVENDRA 24FEB09      | TE Connectivity                                                              |  |           |              |               |
| DIMENSIONS: INCHES                     |  | CHK GESFORD JEFFREY 24FEB09  |                                                                              |  |           |              |               |
|                                        |  | APVD GESFORD JEFFREY 24FEB09 | NAME<br>HEADER ASS'Y MOD II, .025 SQ POST,<br>SINGLE ROW, 100 C/L, STACKABLE |  |           |              |               |
|                                        |  | PRODUCT SPEC                 |                                                                              |  |           |              |               |
|                                        |  | APPLICATION SPEC             | SIZE                                                                         |  | CAGE CODE | DRAWING NO   | RESTRICTED TO |
|                                        |  | WEIGHT -                     | A2                                                                           |  | 00779     | C=87224      | -             |
| MATERIAL 5                             |  | FINISH 2                     | CUSTOMER DRAWING                                                             |  |           |              |               |
|                                        |  |                              |                                                                              |  | SCALE 4:1 | SHEET 1 of 1 | REV L3        |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[87224-1](#)