


D

C


B



A

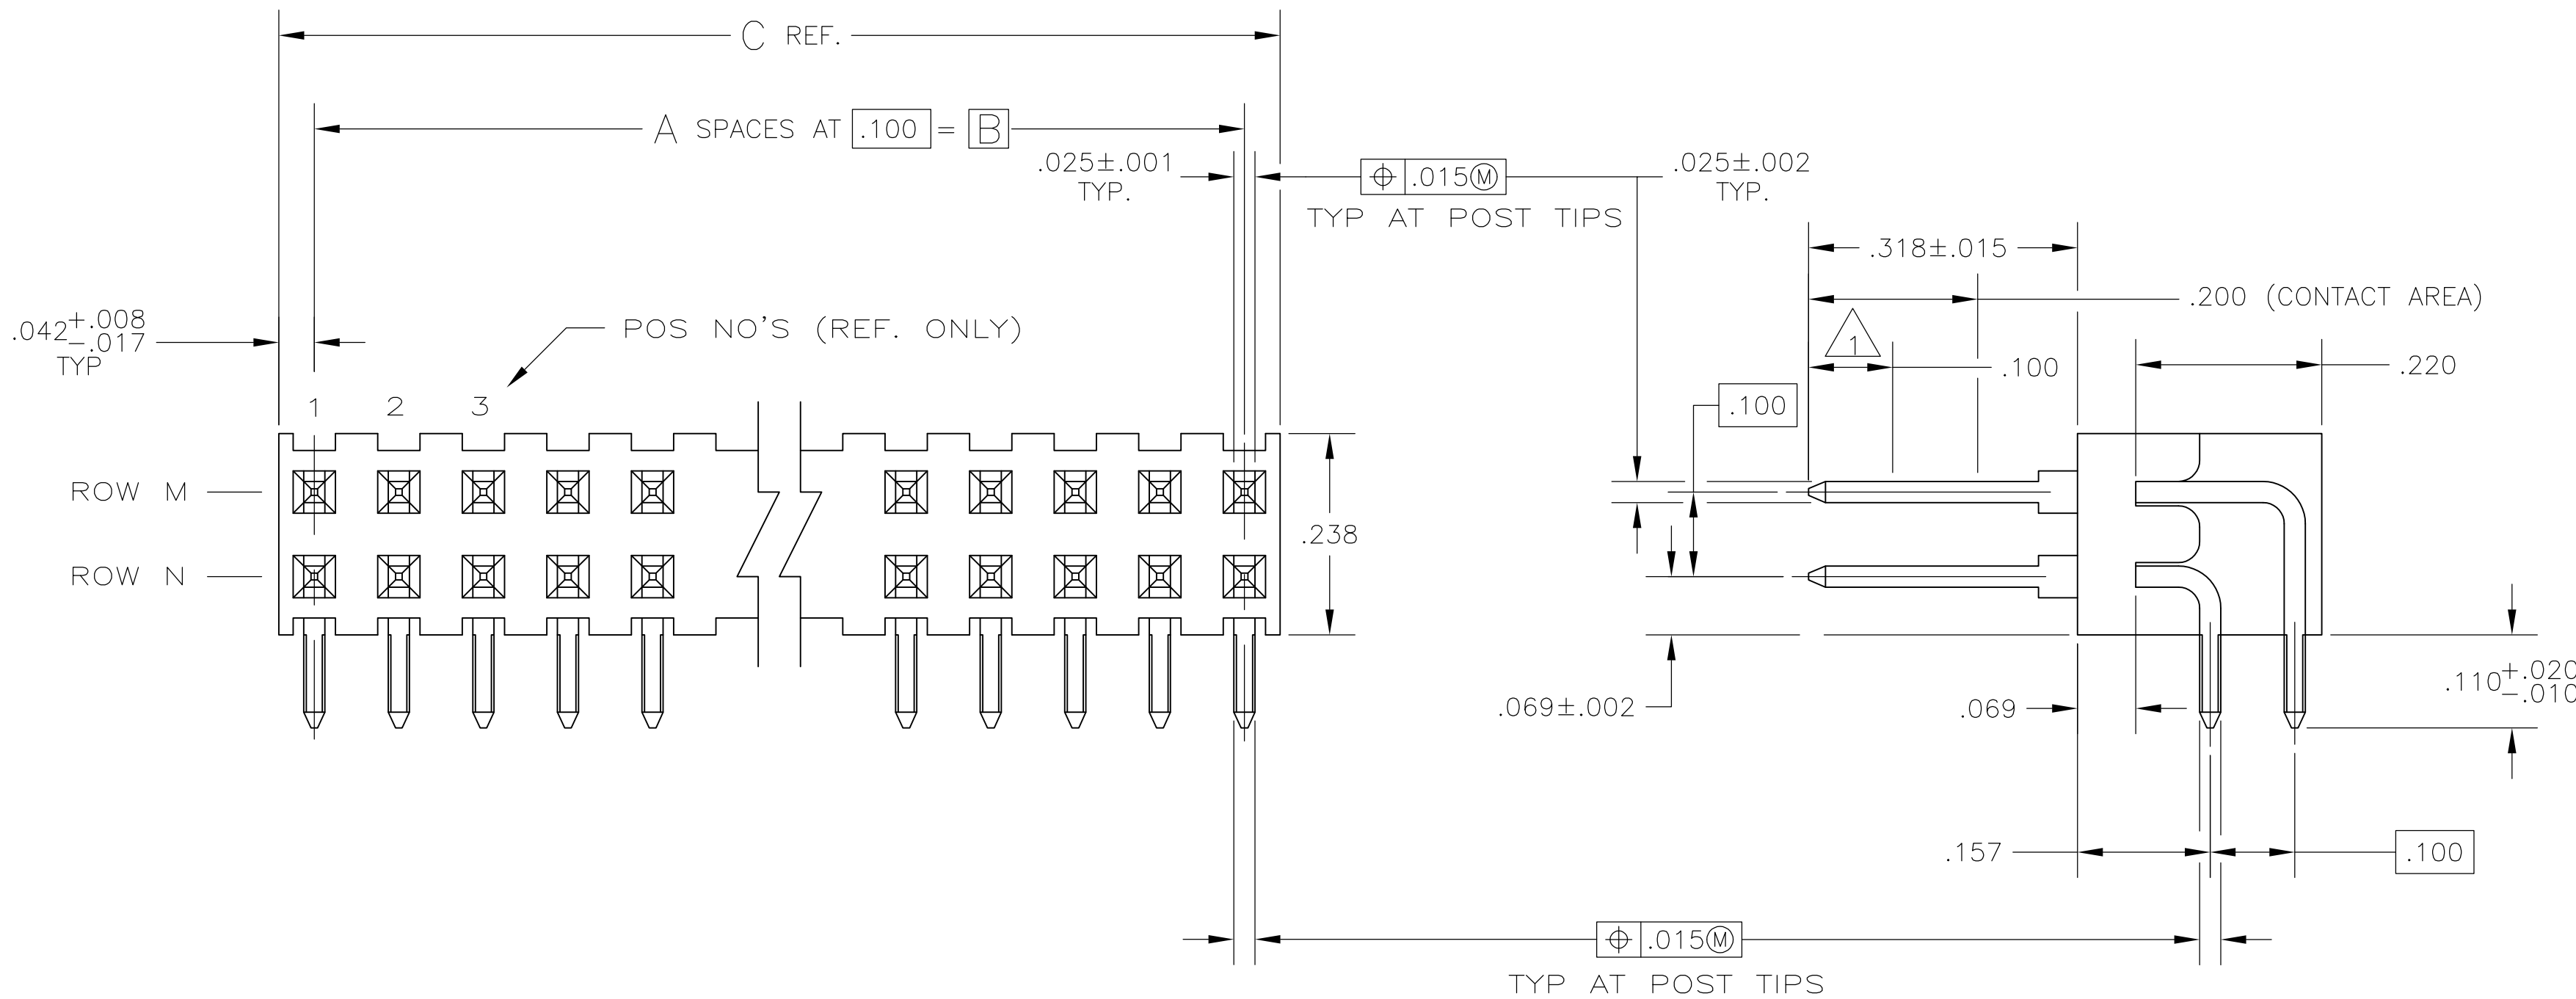

NOTES:

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 2 .000015 GOLD ON THE CONTACT AREA, GOLD FLASH ON SOLDER AREA, ALL OVER .000050 NICKEL
- 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

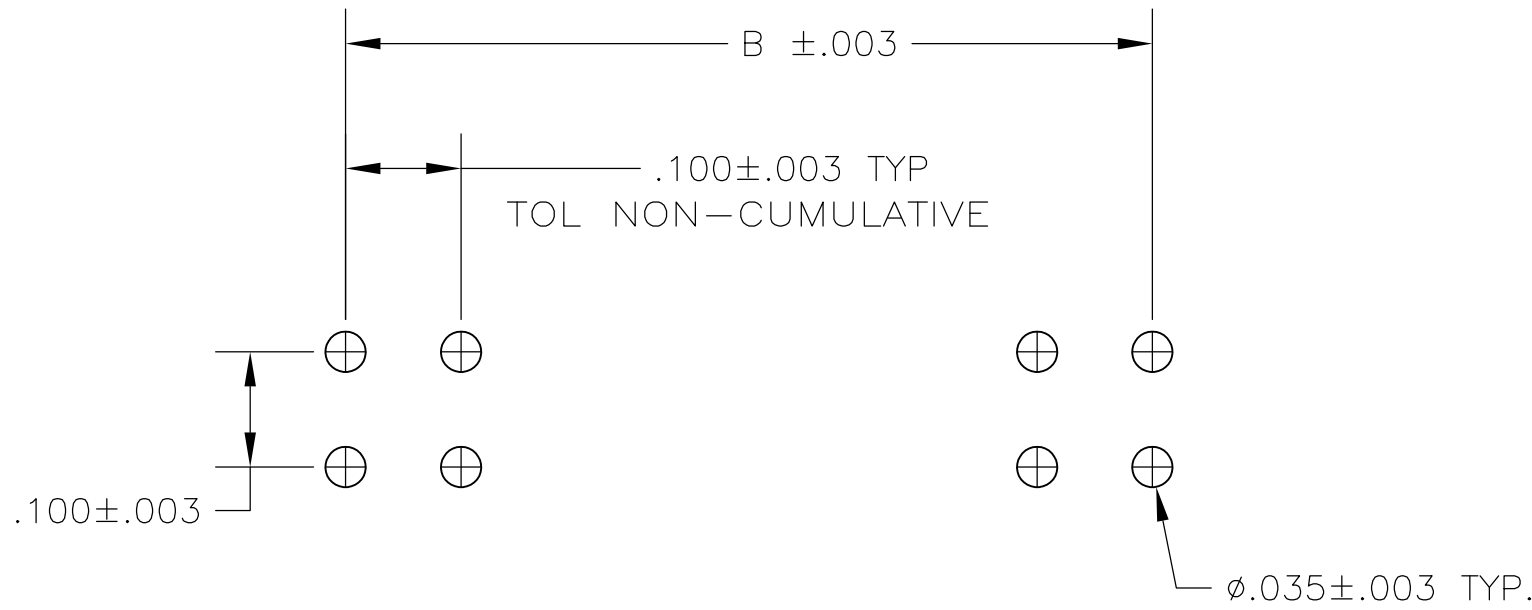

3	OBSOLETE	NONE	6TH	.984	.900	9	19	20	4-87230-3			
	OBSOLETE	2ND	NONE	.584	.500	5	11	12	4-	-2		
	OBSOLETE	4TH		.484	.400	4	9	10	4-	-1		
		NONE		3.984	3.900	39	80	80	4-	-0		
			3.884	3.800	38	78	78	3-	-9			
			3.784	3.700	37	76	76	3-	-8			
			3.684	3.600	36	74	74	3-	-7			
			3.584	3.500	35	72	72	3-	-6			
			3.484	3.400	34	70	70	3-	-5			
			3.384	3.300	33	68	68	3-	-4			
			3.284	3.200	32	66	66	3-	-3			
			3.184	3.100	31	64	64	3-	-2			
			3.084	3.000	30	62	62	3-	-1			
			2.984	2.900	29	60	60	3-	-0			
			2.884	2.800	28	58	58	2-	-9			
			2.784	2.700	27	56	56	2-	-8			
			2.684	2.600	26	54	54	2-	-7			
			2.584	2.500	25	52	52	2-	-6			
			2.484	2.400	24	50	50	2-	-5			
			2.384	2.300	23	48	48	2-	-4			
			2.284	2.200	22	46	46	2-	-3			
			2.184	2.100	21	44	44	2-	-2			
			2.084	2.000	20	42	42	2-	-1			
			1.984	1.900	19	40	40	2-	-0			
			1.884	1.800	18	38	38	1-	-9			
			1.784	1.700	17	36	36	1-	-8			
			1.684	1.600	16	34	34	1-	-7			
			1.584	1.500	15	32	32	1-	-6			
			1.484	1.400	14	30	30	1-	-5			
			1.384	1.300	13	28	28	1-	-4			
			1.284	1.200	12	26	26	1-	-3			
			1.184	1.100	11	24	24	1-	-2			
			1.084	1.000	10	22	22	1-	-1			
			.984	.900	9	20	20	1-	-0			
			.884	.800	8	18	18		-9			
			.784	.700	7	16	16		-8			
			.684	.600	6	14	14		-7			
			.584	.500	5	12	12		-6			
			.484	.400	4	10	10		-5			
			.384	.300	3	8	8		-4			
			.284	.200	2	6	6		-3			
			.184	.100	1	4	4		-2			
	NONE	NONE	.084			2	2		87230-1			
	ROW N	ROW M	C	B	A	NO OF ACT POS	NO OF POS	ASSEMBLY PART NUMBER				
	POSTS OMITTED											
THIS DRAWING IS A CONTROLLED DOCUMENT.				OWN L. MAYER 5-15-85		 TE Connectivity						
				CHK T. ZOLA 5-22-85								
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T. ZOLA 5-22-85		NAME						
		0 PLC ± -		PRODUCT SPEC		ASSEMBLY, MOD II, HEADER, DOUBLE ROW, .100 X .100 CL RIGHT ANGLE, .025 SQ POSTS, SELECTIVELY LOADED						
		1 PLC ± -		—								
		2 PLC ± -		—								
		3 PLC ± .005		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO						
		4 PLC ± -		—								
		ANGLES ± -		—								
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR:BLACK POSTS: PHOS BRONZE		FINISH		WEIGHT -		A1 00779 C-87230 -						
				CUSTOMER DRAWING						SCALE 4:1	SHEET 1 OF 1	REV K3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[87230-8](#)